

Power cable - SAC-5P-MINMS/ 2,0-547/MINFS - 1416647

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Power cable, 5-position, PVC, yellow, Plug straight 7/8"-16UNF, on Socket straight 7/8"-16UNF, cable length: 2 m

Why buy this product

- Easy and safe: 100% electrically tested plug-in components
- High-performance: connectors and cables with a large conductor cross section for power supply

Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 055626 221892 |
| GTIN | 4055626221892 |

Technical data

Dimensions

| | |
|-----------------|-----|
| Length of cable | 2 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|-----------------------------------|
| Ambient temperature (operation) | -20 °C ... 105 °C (Plug / socket) |
| Degree of protection | IP68 |

General

| | |
|-----------------------|----------------------|
| Rated current at 40°C | 8 A |
| Rated voltage | 300 V AC 300 V DC |
| Number of positions | 5 |
| Color handle area | yellow |
| Insulation resistance | ≥ 100 MΩ |
| Coding | A - standard |
| Status display | No |

Power cable - SAC-5P-MINMS/ 2,0-547/MINFS - 1416647

Technical data

General

| | |
|------------------------------|-------------------------|
| Protective circuit/component | Unwired |
| Insertion/withdrawal cycles | 100 |
| Torque | 10 lb _F -in. |
| | 1.12 Nm |

Material

| | |
|--------------------------|-------------------|
| Contact material | CuZn |
| Contact surface material | AU |
| Contact carrier material | PVC |
| Material of grip body | PVC |
| Material, knurls | Anodized aluminum |

Cable

| | |
|--|--|
| Cable type | ITC/PLTC |
| Cable abbreviation | 547 |
| AWG signal line | 18 |
| Conductor cross section signal conductor | 5 x AWG 18 |
| Conductor cross section voltage supply | 41 x AWG 34 |
| Wire colors | Black 1, blue 2, gray 3, brown 4, white 5 |
| External sheath, color | yellow |
| External cable diameter | 6.60 mm |
| Outer sheath, material | PVC |
| Conductor material | Bare Cu litz wires |
| Nominal voltage, cable | 300 V |
| Flame resistance | UL 1581, FT4 |
| Other resistance | UV resistant (720 h) UL 2556 |
| Ambient temperature (operation) | -40 °C ... 105 °C (cable, fixed installation) |
| | -30 °C ... 105 °C (cable, flexible installation) |

Standards and Regulations

| | |
|------------------|------------------------------|
| Flame resistance | UL 1581, FT4 |
| Other resistance | UV resistant (720 h) UL 2556 |


Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings


Power cable - SAC-5P-MINMS/ 2,0-547/MINFS - 1416647

Dimensional drawing

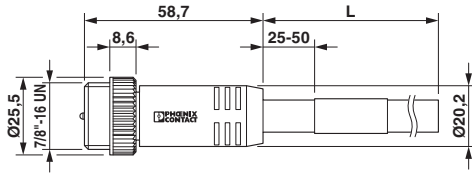


7/8"-16UNF plug, straight

Dimensional drawing

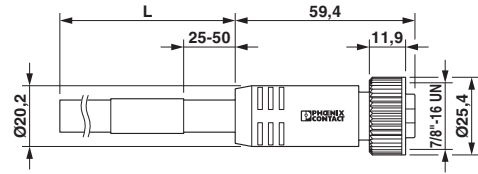


7/8"-16UNF socket, straight

Circuit diagram

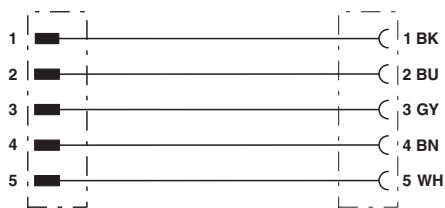


Contact assignment of 7/8" plugs/sockets

Schematic diagram



Pin assignment, plug, 7/8"-16UNF, 5-pos., view of male side

Schematic diagram



Pin assignment, socket, 7/8"-16UNF, 5-pos., view of female side

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

UL Listed



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 221474

Power cable - SAC-5P-MINMS/ 2,0-547/MINFS - 1416647

Approvals

cUL Listed



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> FILE E 221474

cULus Listed



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[60963](#) [60964](#) [703000D02F2002](#) [703001D02F0602](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#) [802027107404-1](#) [802027213811-1](#)
[804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [8R4J30E03C3003](#) [1200651332](#) [1200651713](#) [1200660844](#)
[1200660845](#) [1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#) [1200860125](#) [1200870123](#)
[1200980102](#) [1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#) [1200661342](#) [1200661343](#)
[1200670080](#) [1200670220](#) [1200680331](#) [1200720252](#) [1200730184](#) [1200860344](#) [1200870359](#) [1200870643](#) [1200980008](#) [1200980031](#)
[1210502211](#) [1210400542](#)