

Power cable - SAC-3P-MINMR/ 1,0-U50/MINFR - 1417102

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Power cable, 3-position, PVC, black, Plug angled 7/8"-16UNF, on Socket angled 7/8"-16UNF, Cable length: 1 m

Why buy this product

- Easy and safe: 100% electrically tested plug-in components
- High-performance: connectors and cables with a large conductor cross section for power supply

Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 222387
GTIN	4055626222387
Weight per Piece (excluding packing)	22.220 g
Custom tariff number	85444290
Country of origin	United States
Note	Made to Order (non-returnable)

Technical data

Dimensions

Length of cable	1 m
-----------------	-----

Ambient conditions

Ambient temperature (operation)	-20 °C ... 105 °C (Plug / socket)
Degree of protection	IP68

General

Rated current at 40°C	23.5 A
Rated voltage	600 V AC/DC
Number of positions	3
Insertion/withdrawal cycles	100

Power cable - SAC-3P-MINMR/ 1,0-U50/MINFR - 1417102

Technical data

General

Torque	10 lb _F -in.
	1.12 Nm

Material

Contact material	CuZn
Contact surface material	AU
Contact carrier material	PVC
Material of grip body	PVC
Material, knurls	Aluminum

Cable


Cable type	TC-ER/600V, STOOW
Cable abbreviation	U50
AWG signal line	14
Conductor cross section signal conductor	3 x AWG 14
Wire colors	Green 1, black 2, white 3
Overall twist	3 wires, twisted
External sheath, color	black
External cable diameter	14.53 mm
Outer sheath, material	PVC
Material conductor insulation	PVC
Conductor material	Bare Cu litz wires
Nominal voltage, cable	600 V
Flame resistance	UL 1581, FT2
Resistance to oil	good oil-resistance

Standards and Regulations

Resistance to oil	good oil-resistance
Flame resistance	UL 1581, FT2


Drawings

Dimensional drawing

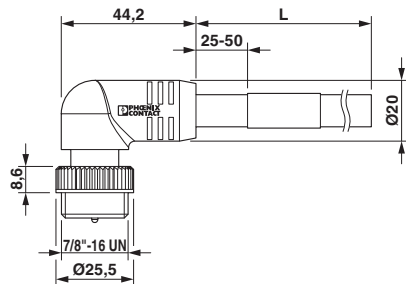

7/8"-16UNF plug, angled


Dimensional drawing

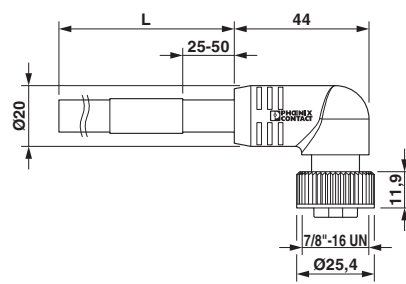

7/8"-16UNF socket, angled


Power cable - SAC-3P-MINMR/ 1,0-U50/MINFR - 1417102

Circuit diagram

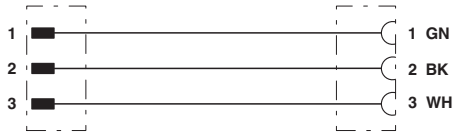


Contact assignment of the 7/8" connector and the 7/8" socket

Schematic diagram



Plug pin assignment for 7/8"-16UNF plug, 5-pos.

Schematic diagram



Pin assignment, socket, 7/8"-16UNF, 5-pos., view of female side

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[1300070444](#) [43-10984](#) [M83513/19-F01CP](#) [704000D02F120](#) [MDM15SH001K](#) [MDM25PH003BF222](#) [802027107404-1](#) [885030A09M010](#)
[885030A09M020](#) [1200650174](#) [1200651332](#) [1200651713](#) [1200660171](#) [1200660208](#) [1200660343](#) [1200660804](#) [1200660845](#) [1200660926](#)
[1200660977](#) [1200661173](#) [1200661354](#) [120066-1712](#) [1200720053](#) [1200720099](#) [1200720153](#) [1200720172](#) [1200720217](#) [1200720226](#)
[1200720251](#) [1200720285](#) [1200720296](#) [1200720404](#) [1200730148](#) [1200730378](#) [1200800231](#) [1200860112](#) [1200860121](#) [1200860125](#)
[1200860337](#) [1200860365](#) [1200860420](#) [1200870046](#) [1200870123](#) [1200870248](#) [1200980102](#) [1200660181](#) [1200660183](#) [1200660827](#)
[1200660849](#) [1200661170](#)