

Module - FOC-MODUL:3U-OS12-LCD6-OM1 - 1419978

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Module, type: 19" rack patch module, degree of protection: IP20, number of positions: 12, material: Aluminum alloy, color: gray

Your advantages

- Front release without special tool
- All connections on the front side
- Space-saving module insert with high packing density
- Plug and play
- Can be flexibly installed in module carrier
- Compact design with MT ferrule
- Can be easily extended, thanks to the modular design

Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4055626198286

Technical data

Mechanical characteristics

Number of positions	12
Locking type	Screw locking, knurled head
Fiber type	GOF
Insertion/withdrawal cycles	≥ 500 (In the event of repeated cleaning)
Type of cable	Fan out
Color	gray
Mounting type	Screw mounting
Degree of protection	IP20
Type	3 HE

Module - FOC-MODUL:3U-OS12-LCD6-OM1 - 1419978

Technical data

Mechanical characteristics

No. of cable outlets	0
----------------------	---

Ambient conditions

Ambient temperature (operation)	-10 °C ... 60 °C (IEC 61300-2-22)
Degree of protection	IP20
	IP20

Material data

Flammability rating according to UL 94	V0
Housing material	Aluminum alloy
Housing surface material	Powder-coated, gray
Outer sheath, material	LSFH
Ferrule material	Zirconia ceramics
Depth	200 mm
Height	128.5 mm

Line characteristics

Type of cable	Fan out
Cable type	Multimode fiberglass
Transmission medium	Multi-mode fiberglass
Number of fibers	12
Fiber type	Multimode fiberglass 62.5/125 µm
Fiber	62.5/125 µm OM1
Attenuation	typ. 0.35 dB
	max. 0.6 dB
Outer sheath, material	LSFH
Halogen-free	complying with IEC 60754-1/2

Standards and Regulations

Halogen-free	complying with IEC 60754-1/2
Flammability rating according to UL 94	V0


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Module - FOC-MODUL:3U-OS12-LCD6-OM1 - 1419978

Dimensional drawing

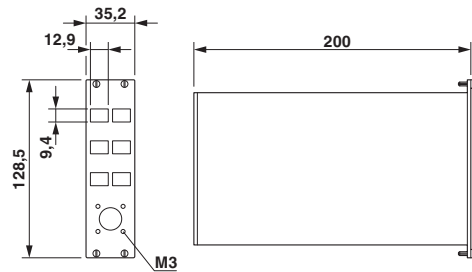

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Cable Assemblies](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[7-21002-9](#) [760-1518](#) [FA04390-50-M-72-LC-N](#) [MLB 501 V RED](#) [MLB 501 V YELLOW](#) [1-3636-600-5208](#) [2061529-7](#) [1-6693182-0](#)
[1754898-1](#) [21055-6](#) [FXBSCSCE2LM002](#) [3000005](#) [3-21053-2](#) [MLB 200/1 V BLACK](#) [5492011-6](#) [106284-7000](#) [5492011-5](#) [5492011-8](#)
[5492011-9](#) [8-21007-5](#) [2123524-2](#) [2123524-1](#) [106386-4447](#) [DFSM-SCSC-2M](#) [2123909-4](#) [2123909-8](#) [106273-0629](#) [2125046-1](#) [2821236-3](#)
[2821310-2](#) [2821310-3](#) [2821313-4](#) [FX2ERLNLNSNM0.5](#) [CF-980062-074](#) [CF-901200-394](#) [CF-980062-073](#) [CF-980062-071](#) [CF-980062-075](#)
[CF-980062-072](#) [17-300310-100](#) [2821236-2](#) [2821313-1](#) [G-FC-FC-S-002.0-DX-A-18-Y](#) [G-E2A-E2A-S-003.0-SX-A-18-Y](#) [956-322-502214](#)
[FA04474](#) [1083665](#) [1111540](#) [1111843](#) [1115533](#)