

Protective covers - HC-HPR-D07-BCSWH-EM-BK - 1424636

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Protective cover D7, with screw locking, material: Zinc die-cast, protective cover material: Zinc, height: 28.5 mm, cable gland: none, Railway applications, for increased environmental and EMC requirements, Series HPR



COMPLIANT

Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 055626 375656 |
| GTIN | 4055626375656 |

Technical data

Dimensions

| | |
|--------|---------|
| Height | 28.5 mm |
| Width | 32.6 mm |
| Length | 45.7 mm |

Ambient conditions

| | |
|---------------------------------|---|
| Degree of protection (IP) | IP66 (with sealing screw) |
| | IP68 (0.4 bar / 30 min. with sealing screw) |
| | IP69 (ISO 20653:2013-02) |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|------------------|--|
| Note | for contact inserts HC-D7, D8, A3, A4, HS2-D7, Q5, Q7, Q12 |
| Size | D7 |
| Housing type | Protective cover |
| Color | black |
| Locking type | with screw locking |
| Torque | 1 Nm (Locking screw) |
| Screw connection | none |
| Material | Zinc die-cast |

Protective covers - HC-HPR-D07-BCSWH-EM-BK - 1424636

Technical data

General


| | |
|----------------------------|---|
| Housing material | Zinc die-cast |
| Housing surface material | Powder-coated, black |
| Material lock | Stainless steel |
| Material of locking screw | Stainless steel |
| Material, protective cover | Zinc |
| Assembly instructions | M4 locking screw, slotted hexagon head screw (wrench size 7), tightening torque: 1 Nm. The seal of the pin contact insert should be removed. Max. thread length of the screw connection: 6 mm |
| Connection | Mount contact insert with sealing screw in the housing |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

Dimensional drawing

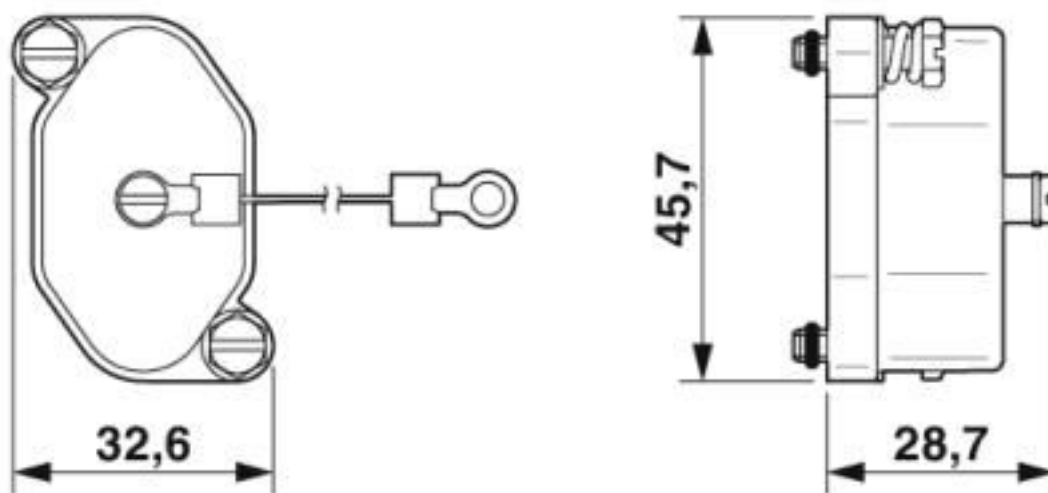

Dimensional drawing

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27440208 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27261200 |
| eCl@ss 7.0 | 27440208 |
| eCl@ss 8.0 | 27440208 |
| eCl@ss 9.0 | 27440208 |

Protective covers - HC-HPR-D07-BCSWH-EM-BK - 1424636

Classifications

ETIM

| | |
|----------|----------|
| ETIM 5.0 | EC002314 |
| ETIM 6.0 | EC002314 |
| ETIM 7.0 | EC002314 |

Approvals


Approvals

Approvals

EAC

Ex Approvals

Approval details

| | | |
|-----|---|---------------|
| EAC |  | EAC-Zulassung |
|-----|---|---------------|

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)
[6651788-1](#) [696475-1](#) [702-32-01109](#) [703-25-02205](#) [73000005059](#) [73000005642](#) [765-15-0080A](#) [765-16-0080B](#) [765-18-0080D](#) [829992-1](#)
[902-77-02113](#) [PS00/A0620/6300](#) [129-1J](#) [1409400](#) [AN0024023](#) [E6374G1](#) [e6389g2](#) [157-43GW8](#) [MS3117-14AC](#) [1643543-1](#) [1650540-1](#)
[1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [NLS-2-R-C240-](#)
[M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#) [KA8102](#) [9300480317](#) [SBS50BRN#6](#) [29131](#)