

## Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus system cable, INTERBUS (16 Mbps), 5-position, PUR halogen-free, may green RAL 6017, shielded, Plug straight M12, coding: B, on Socket straight M12, coding: B, cable length: 5 m



### Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 1 pc  |
| GTIN         | <br>4 017918 900052 |
| GTIN         | 4017918900052   |

### Technical data

#### Dimensions

|                 |     |
|-----------------|-----|
| Length of cable | 5 m |
|-----------------|-----|

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |

#### General

|                       |   |
|-----------------------|---|
| Note                  | Further products with variable cable type and variable cable length can be found in the accessories section |
| Rated current at 40°C | 4 A   |
| Rated voltage         | 48 V AC<br>60 V DC  |
| Number of positions   | 5   |
| Insulation resistance | ≥ 100 MΩ  |
| Coding                | B - inverse   |
| Signal type/category  | INTERBUS, 16 Mbps   |
| Status display        | No  |
| Overvoltage category  | II  |

# Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201

## Technical data

### General

|                             |                        |
|-----------------------------|------------------------|
| Degree of pollution         | 3                      |
| Insertion/withdrawal cycles | ≥ 100                  |
| Torque                      | 0.4 Nm (M12 connector) |

### Material

|  |   |
|--|---|
| Flammability rating according to UL 94 | V0  |
| Contact material                       | CuSn  |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | PA 6.6                                      |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                       | Zinc die-cast, nickel-plated                |
| Sealing material                       | NBR   |

### Pin assignment

|   |                                  |
|---|----------------------------------|
| Contact   Color (signal designation)   Contact (optional) | 1 (Plug)   YE (DO)   1 (Socket)  |
|   | 2 (Plug)   GN (DO)   2 (Socket)  |
|   | 3 (Plug)   GY (DI)   3 (Socket)  |
|   | 4 (Plug)   PK (DI)   4 (Socket)  |
|   | 5 (Plug)   BN (GND)   5 (Socket) |

### Standards and Regulations

|  |    |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

### Cable

|   |                                      |
|---|--------------------------------------|
| Cable type                                    | INTERBUS                             |
| Cable type (abbreviation)                     | 900                                  |
| Cable structure                               | 3 x 2 x 0.22 mm <sup>2</sup>         |
| Conductor cross section                       | 3x 2x 0.22 mm <sup>2</sup>           |
| AWG signal line                               | 24                                   |
| Conductor structure signal line               | 32x 0.10 mm                          |
| Wire colors                                   | Green-yellow, white-brown, gray-pink |
| Twisted pairs                                 | 2 cores to the pair                  |
| Overall twist                                 | 3 pairs to the core                  |
| Shielding                                     | Braided copper wires                 |
| External sheath, color                        | may green RAL 6017                   |
| External cable diameter D                     | 8 mm                                 |
| Minimum bending radius, fixed installation    | 7.5 x D                              |
| Minimum bending radius, flexible installation | 15 x D                               |
| Number of bending cycles                      | 5000000                              |
| Bending radius                                | 120 mm                               |
| Traversing path                               | 10 m                                 |
| Traversing rate                               | 1.6 m/s                              |
| Acceleration                                  | 3.2 m/s <sup>2</sup>                 |

## Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201

### Technical data

#### Cable

|                                       |   |
|---------------------------------------|---|
| Cable weight                          | 70 kg/km  |
| Outer sheath, material                | PUR   |
| Material conductor insulation         | PE  |
| Conductor material                    | Bare Cu litz wires                                  |
| Insulation resistance                 | $\geq 5 \text{ G}\Omega \cdot \text{km}$            |
| Loop resistance                       | $\leq 159.80 \text{ }\Omega/\text{km}$              |
| Cable capacity                        | $\leq 60 \text{ nF/km}$ (At 800 Hz)                 |
| Wave impedance                        | $120 \text{ }\Omega \pm 20 \%$ (at 64 kHz)          |
|                                       | $100 \text{ }\Omega \pm 15 \%$ (with 1 MHz)         |
| Near end crosstalk attenuation (NEXT) | $\geq 61 \text{ dB}$ (at 772 kHz)                   |
|                                       | $\geq 59 \text{ dB}$ (with 1 MHz)                   |
|                                       | $\geq 55 \text{ dB}$ (at 2 MHz)                     |
|                                       | $\geq 50 \text{ dB}$ (at 4 MHz)                     |
|                                       | $\geq 46 \text{ dB}$ (at 8 MHz)                     |
|                                       | $\geq 44 \text{ dB}$ (at 10 MHz)                    |
|                                       | $\geq 41 \text{ dB}$ (at 16 MHz)                    |
|                                       | $\geq 40 \text{ dB}$ (at 20 MHz)                    |
| Attenuation                           | $\leq 15 \text{ dB/km}$ (at 256 kHz)                |
|                                       | $\leq 24 \text{ dB/km}$ (at 772 kHz)                |
|                                       | $\leq 27 \text{ dB/km}$ (with 1 MHz)                |
|                                       | $\leq 52 \text{ dB/km}$ (at 4 MHz)                  |
|                                       | $\leq 84 \text{ dB/km}$ (at 10 MHz)                 |
|                                       | $\leq 112 \text{ dB/km}$ (at 16 MHz)                |
|                                       | $\leq 119 \text{ dB/km}$ (at 20 MHz)                |
| Signal speed                          | 0.66 c  |
| Coupling resistance                   | $< 250.00 \text{ m}\Omega/\text{m}$ (at 30 MHz)     |
| Nominal voltage, cable                | 250 V (Peak value, not for high-power applications) |
| Test voltage Core/Core                | $1500 \text{ V}_{\text{rms}}$                       |
| Test voltage Core/Shield              | $1000 \text{ V}_{\text{rms}}$                       |
| Flame resistance                      | according to VDE 0472, Part 4, test type B          |
|                                       | according to IEC 60332-1                            |
| Ambient temperature (operation)       | -40 °C ... 80 °C (cable, fixed installation)        |
|                                       | -30 °C ... 70 °C (cable, flexible installation)     |


#### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

#### Drawings


## Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201

Dimensional drawing

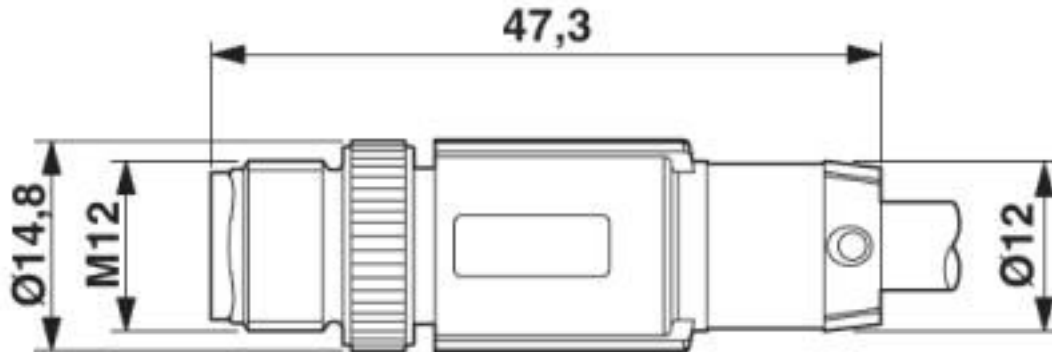

Plug, M12 x 1, straight, shielded


Dimensional drawing

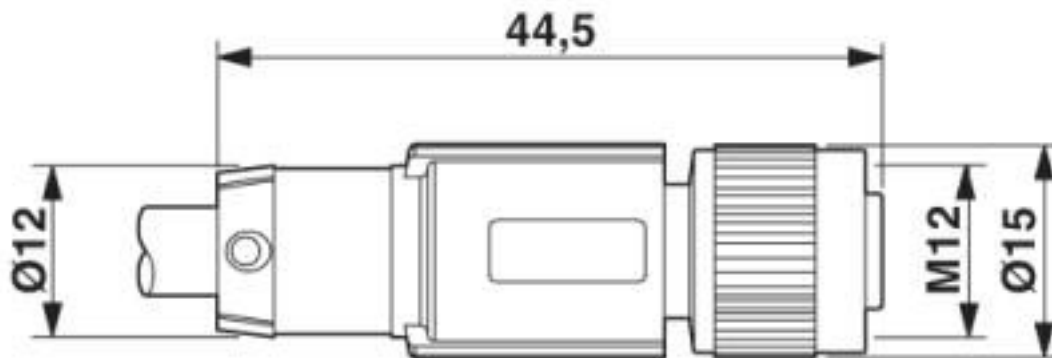

M12 x 1 socket, straight, shielded

## Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201


Circuit diagram

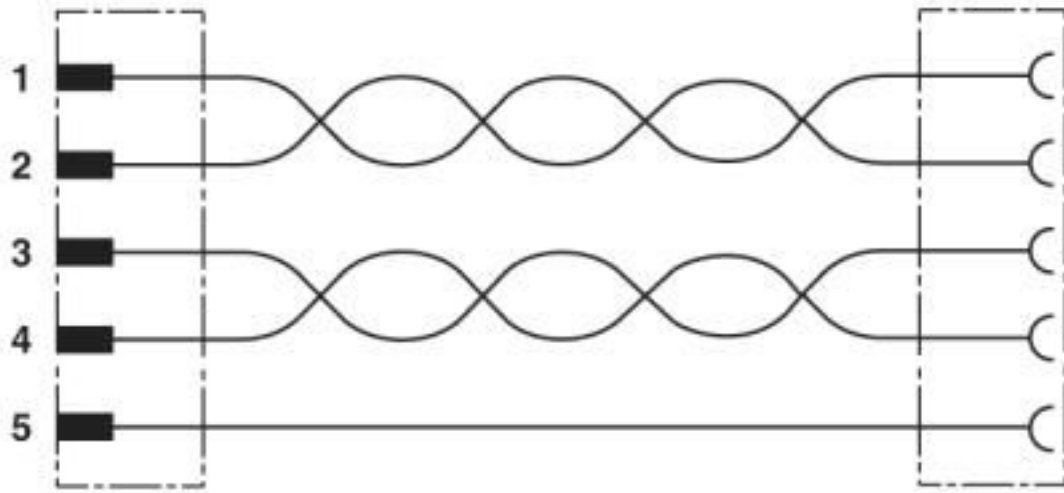

Contact assignment of the M12 connector and the M12 socket

## Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201


Schematic diagram

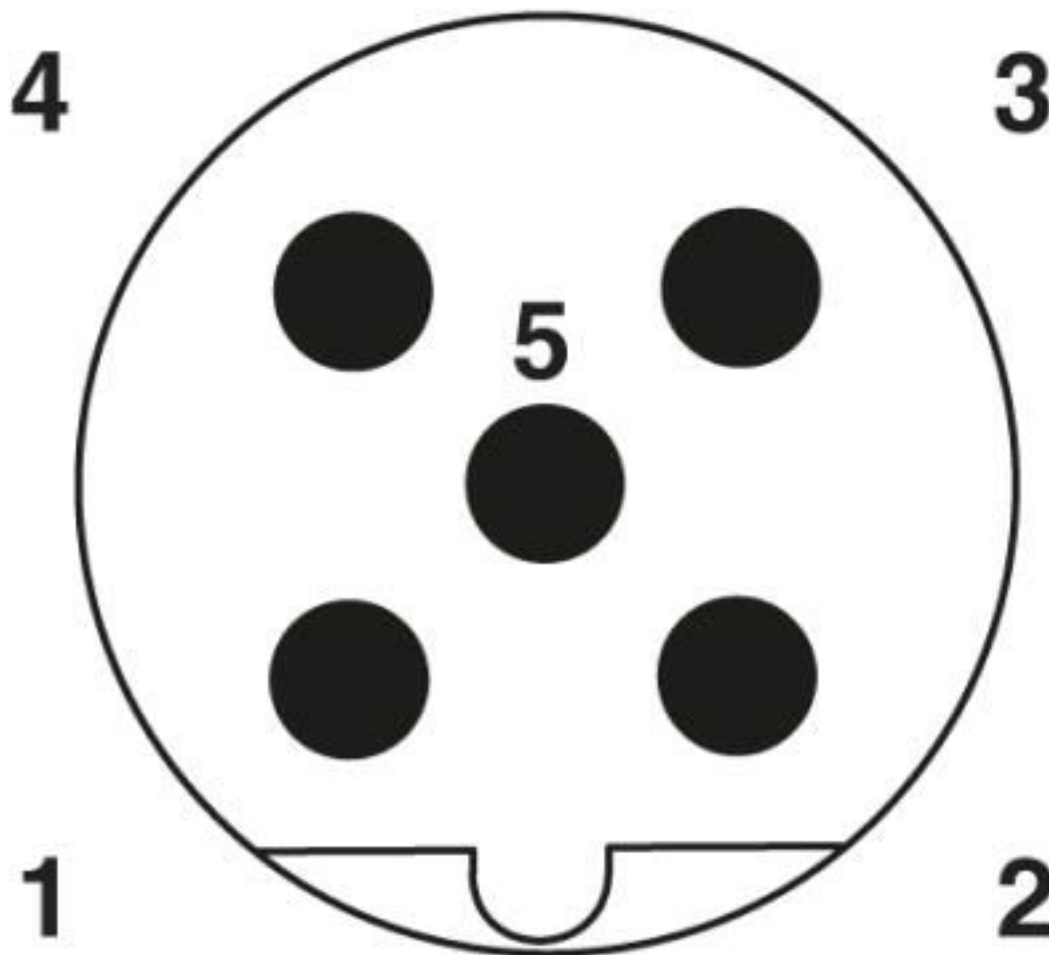

Pin assignment M12 male connector, 5-pos., B-coded, male side

# Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201


Schematic diagram

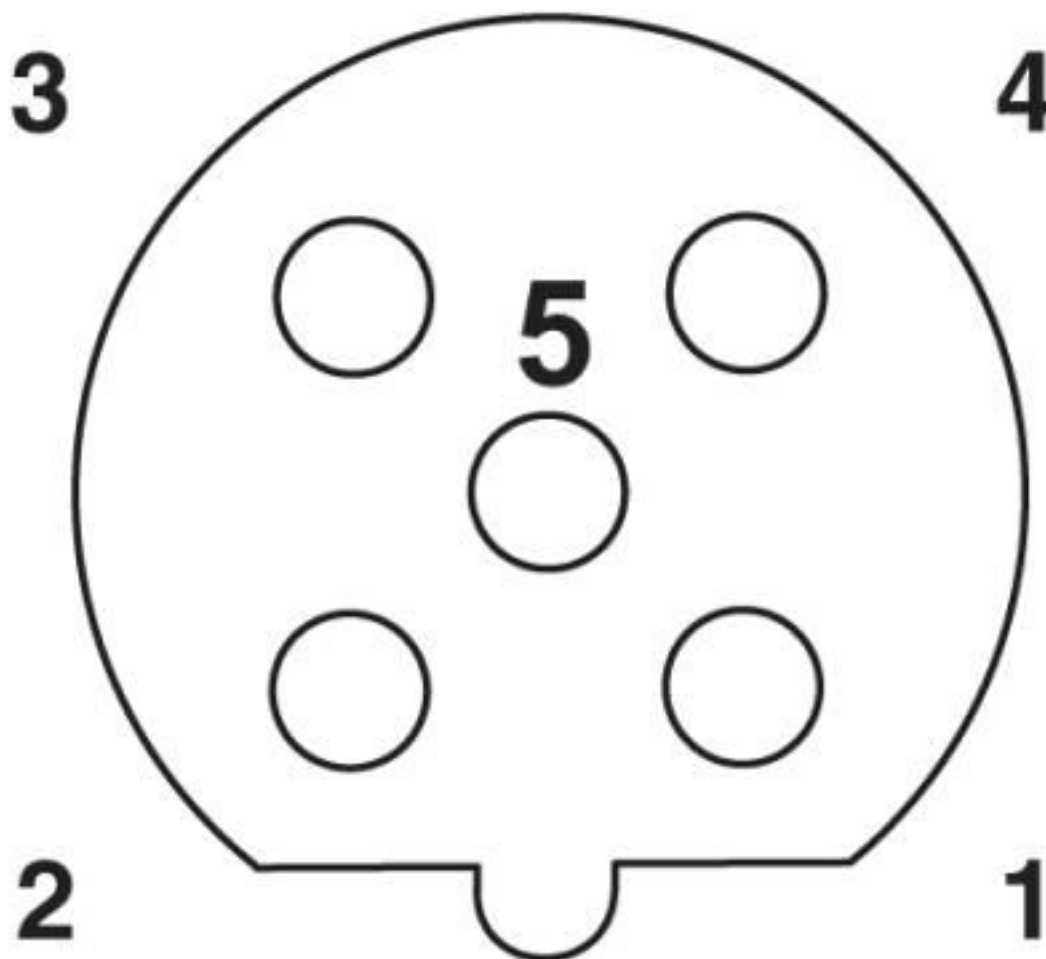

Pin assignment M12 socket, 5-pos., B-coded, female side

## Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201

Cable cross section

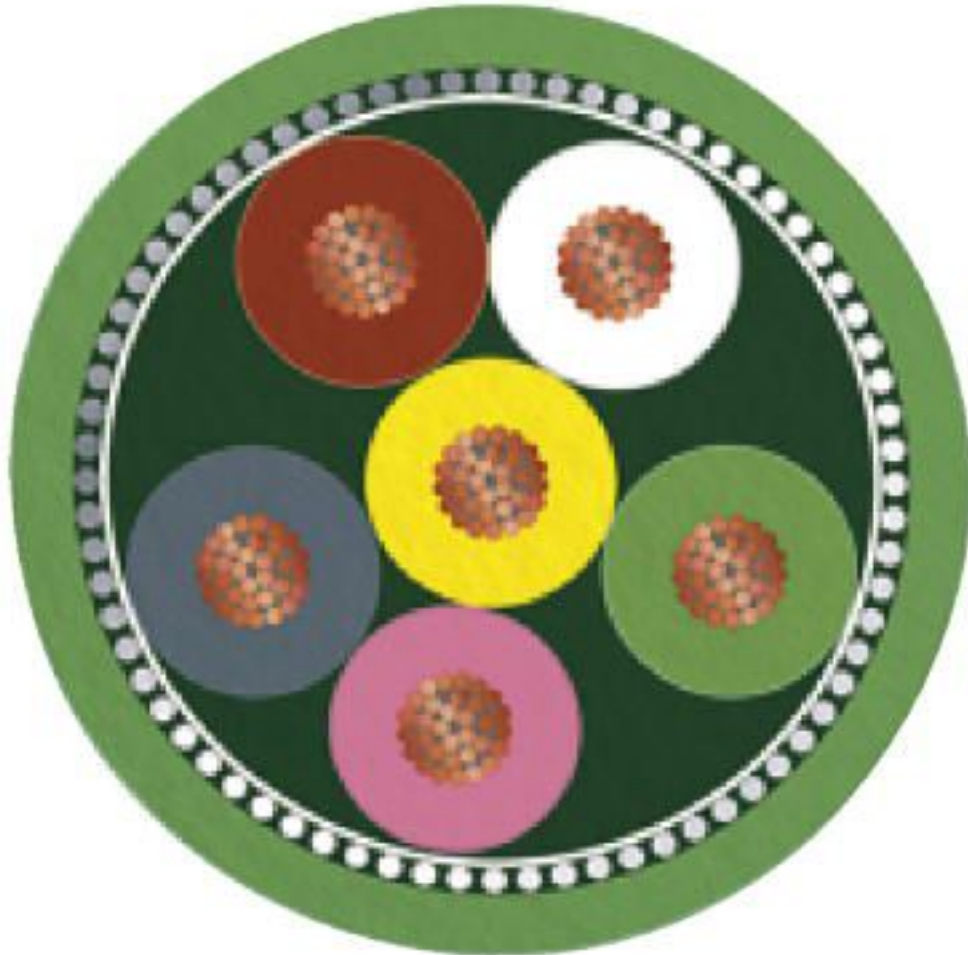

INTERBUS [900]

### Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27060308 |
| eCl@ss 4.0    | 27060300 |
| eCl@ss 4.1    | 27060300 |
| eCl@ss 5.0    | 27061800 |
| eCl@ss 5.1    | 27061800 |
| eCl@ss 6.0    | 27279200 |
| eCl@ss 7.0    | 27279218 |
| eCl@ss 8.0    | 27279218 |
| eCl@ss 9.0    | 27060308 |



# Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC002599 |
| ETIM 6.0 | EC001262 |
| ETIM 7.0 | EC001262 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |
| UNSPSC 18.0   | 26121604 |
| UNSPSC 19.0   | 26121604 |
| UNSPSC 20.0   | 26121604 |
| UNSPSC 21.0   | 26121604 |

## Approvals

### Approvals

---

#### Approvals

EAC / EAC-RoHS / EAC

---

#### Ex Approvals

---

### Approval details

|     |  |                          |
|-----|--|--------------------------|
| EAC |  | RU C-<br>DE.BL08.B.00286 |
|-----|--|--------------------------|

|          |  |                          |
|----------|--|--------------------------|
| EAC-RoHS |  | RU D-<br>DE.HB35.B.00387 |
|----------|--|--------------------------|

|     |  |               |
|-----|--|---------------|
| EAC |  | EAC-Zulassung |
|-----|--|---------------|

## Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201

### Accessories

#### Accessories

#### Data cable preassembled

#### Bus system cable - SAC-5P-M12MSB/900/... - 1537983



Bus system cable, INTERBUS (16 Mbps), 5-position, PUR halogen-free, may green RAL 6017, shielded, Plug straight M12, coding: B, on free cable end, cable length: Free input (0.2 ... 40.0 m)

#### Bus system cable - SAC-5P-M12FSB/900/... - 1538005



Bus system cable, INTERBUS (16 Mbps), 5-position, PUR halogen-free, may green RAL 6017, shielded, free cable end, on Socket straight M12, coding: B, cable length: Free input (0.2 ... 40.0 m)

#### Bus system cable - SAC-5P-M12MSB-M12FSB/900/... - 1538021



Bus system cable, INTERBUS (16 Mbps), 5-position, PUR halogen-free, may green RAL 6017, shielded, Plug straight M12, coding: B, on Socket straight M12, coding: B, cable length: Free input (0.2 ... 40.0 m)

### Plug for cable screw gland

#### Screw plug - PROT-M12 MS-PA-CHAIN - 1430899

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



### Protective cap

#### Sealing cap - PROT-M12 FS-PA-CHAIN - 1430873

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



## Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201

### Accessories

#### Safety locking

Locking clip - SAC-M12-EXCLIP-M - 1558988



Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools

Locking clip - SAC-M12-EXCLIP-F - 1558991



Locking clip for the socket side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools

#### Screwdriver tools

Adapter insert - TSD-M SAC-BIT ADAPTER - 1212600



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

Tool - SAC BIT M12-D15 - 1208432



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

#### Torque tool

Torque screwdriver - TSD 04 SAC - 1208429



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

## Bus system cable - SAC-5P-M12MSB/ 5,0-900/M12FSB - 1507201

### Accessories

Torque screwdriver - TSD-M 1,2NM - 1212224



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sensor Cables / Actuator Cables](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[60963](#) [60964](#) [703000D02F2002](#) [703001D02F0602](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#) [802027107404-1](#) [802027213811-1](#)  
[804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [8R4J30E03C3003](#) [1200651332](#) [1200651713](#) [1200660844](#)  
[1200660845](#) [1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#) [1200860125](#) [1200870123](#)  
[1200980102](#) [1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#) [1200661342](#) [1200661343](#)  
[1200670080](#) [1200670220](#) [1200680331](#) [1200720252](#) [1200730184](#) [1200860344](#) [1200870359](#) [1200870643](#) [1200980008](#) [1200980031](#)  
[1210502211](#) [1210400542](#)