

Bus system cable - SAC-2P-10,0-915/M12FSB - 1525513


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus system cable, PROFIBUS, 2-position, PUR/PVC, blue, shielded, free cable end, on Socket straight M12, coding: B, cable length: 10 m



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 017918 950170 |
| GTIN | 4017918950170 |

Technical data

Dimensions

| | |
|-----------------|------|
| Length of cable | 10 m |
|-----------------|------|

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 |

General

| | |
|-----------------------------|-------------|
| Rated current at 40°C | 4 A |
| Rated voltage | 48 V AC |
| | 60 V DC |
| Number of positions | 2 |
| Insulation resistance | ≥ 100 MΩ |
| Coding | B - inverse |
| Signal type/category | PROFIBUS |
| Status display | No |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Insertion/withdrawal cycles | ≥ 100 |

Bus system cable - SAC-2P-10,0-915/M12FSB - 1525513

Technical data

General

| | |
|--------|------------------------|
| Torque | 0.4 Nm (M12 connector) |
|--------|------------------------|

Material

| | |
|--|---|
| Flammability rating according to UL 94 | V0 |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |
| Sealing material | NBR |

Pin assignment

| | |
|---|---------------------------|
| Contact Color (signal designation) Contact (optional) | 2 (Socket) GN (A cable) |
| | 4 (Socket) RD (B cable) |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Cable

| | |
|---|--|
| Cable type | PROFIBUS |
| Cable type (abbreviation) | 915 |
| Cable structure | 1x2xAWG24/19 |
| Conductor cross section | 2x 0.25 mm ² |
| AWG signal line | 24 |
| Conductor structure signal line | 19x 0.14 mm |
| Core diameter including insulation | 2.56 mm |
| Wire colors | Red, green |
| Overall twist | 2 wires, twisted |
| Shielding | Aluminum-coated foil, tinned copper braided shield |
| Optical shield covering | 70 % |
| External sheath, color | blue |
| Outer sheath thickness | approx. 0.8 mm |
| External cable diameter D | 8 mm ±0.4 mm |
| Minimum bending radius, flexible installation | 5 x D |
| Number of bending cycles | 3000000 |
| Bending radius | 60 mm |
| Acceleration | 4 m/s ² |
| Cable weight | 74 kg/km |
| Tensile strength GRP | ≤ 100 N |
| Outer sheath, material | PUR |
| Material, inner sheath | PVC |
| Material conductor insulation | Foamed PE |
| Conductor material | Bare Cu litz wires |

Bus system cable - SAC-2P-10,0-915/M12FSB - 1525513

Technical data

Cable


| | |
|---------------------------------|---|
| Insulation resistance | $\geq 16 \text{ G}\Omega\cdot\text{km}$ |
| Working capacitance | 28 nF (at 1 kHz) |
| Nominal voltage, cable | $\leq 100 \text{ V}$ |
| Test voltage Core/Core | 3600 V DC |
| Flame resistance | according to IEC 60332-1 |
| Resistance to oil | Resistant to mineral oils and grease |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, flexible installation) |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings


Dimensional drawing

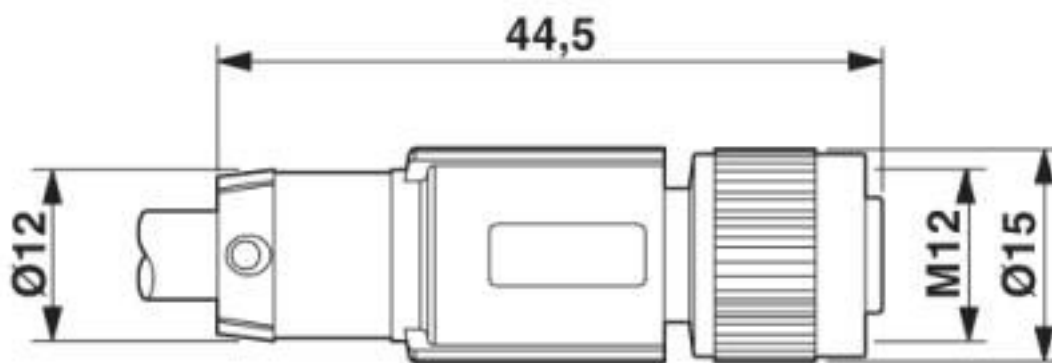

M12 x 1 socket, straight, shielded


Bus system cable - SAC-2P-10,0-915/M12FSB - 1525513

Circuit diagram

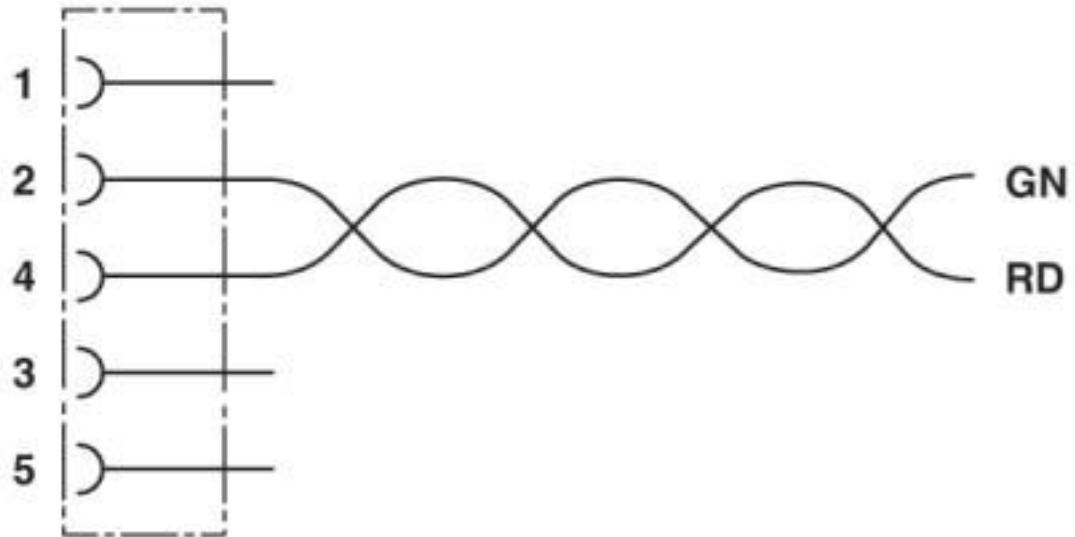

Bus system cable - SAC-2P-10,0-915/M12FSB - 1525513

Schematic diagram

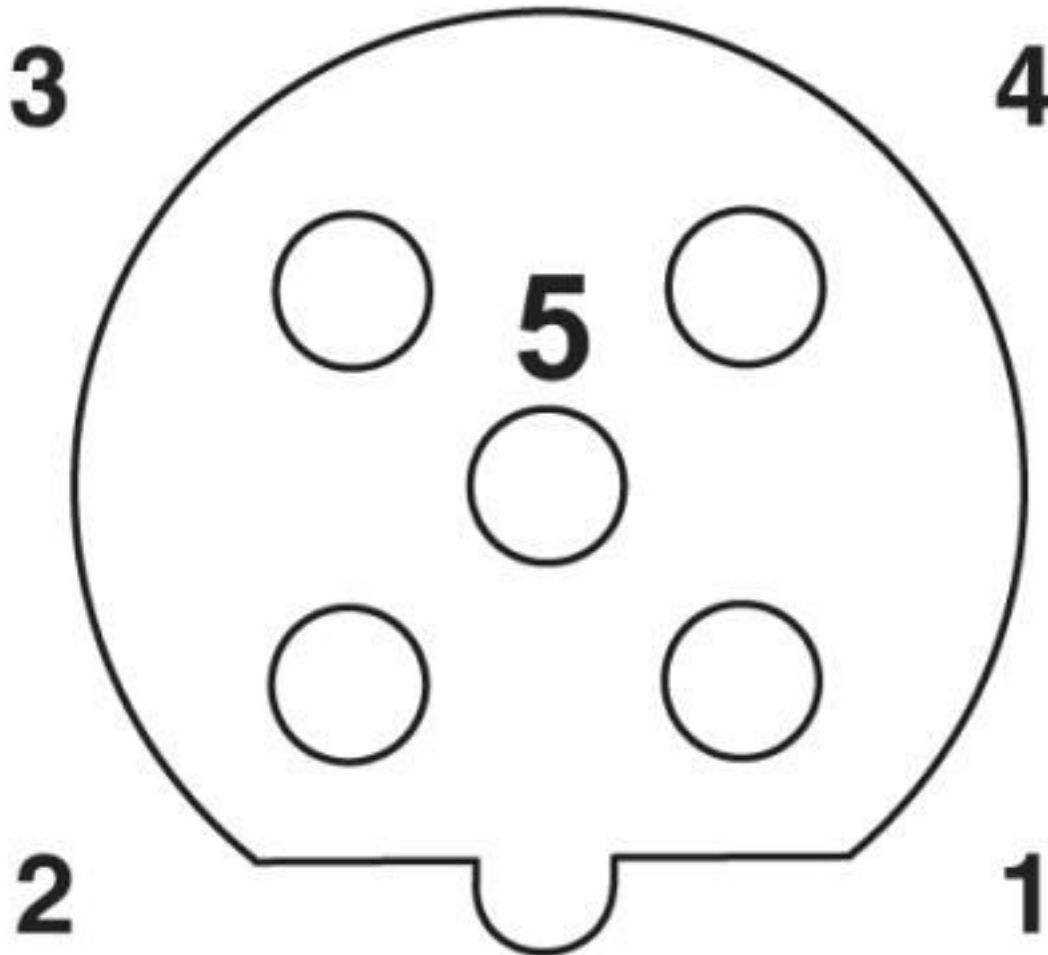

Pin assignment M12 socket, 5-pos., B-coded, female side

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27060308 |
| eCl@ss 4.0 | 27060300 |
| eCl@ss 4.1 | 27060300 |
| eCl@ss 5.0 | 27061800 |
| eCl@ss 5.1 | 27061800 |
| eCl@ss 6.0 | 27279200 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060308 |

Bus system cable - SAC-2P-10,0-915/M12FSB - 1525513

Classifications

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC002599 |
| ETIM 6.0 | EC001262 |
| ETIM 7.0 | EC001262 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |
| UNSPSC 18.0 | 26121604 |
| UNSPSC 19.0 | 26121604 |
| UNSPSC 20.0 | 26121604 |
| UNSPSC 21.0 | 26121604 |

Approvals

Approvals

Approvals

EAC-RoHS / EAC

Ex Approvals

Approval details

| | | |
|----------|--|--------------------------|
| EAC-RoHS | | RU D- DE.HB35.B.00387 |
|----------|--|--------------------------|

| | | |
|-----|--|--------------------------|
| EAC | | RU C- DE.BL08.B.00286 |
|-----|--|--------------------------|

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[60963](#) [60964](#) [703000D02F2002](#) [703001D02F0602](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#) [802027107404-1](#) [802027213811-1](#)
[804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [8R4J30E03C3003](#) [1200651332](#) [1200651713](#) [1200660844](#)
[1200660845](#) [1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#) [1200860125](#) [1200870123](#)
[1200980102](#) [1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#) [1200661342](#) [1200661343](#)
[1200670080](#) [1200670220](#) [1200680331](#) [1200720252](#) [1200730184](#) [1200860344](#) [1200870359](#) [1200870643](#) [1200980008](#) [1200980031](#)
[1210502211](#) [1210400542](#)