PHŒNIX CONTACT

Protective hose - WR/PG16-50M - 1666841

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

Protective hose, for protective house screw connection, packing volume: 50 m, Pg16

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4017918136888

4 017918 136888

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 110 °C

General

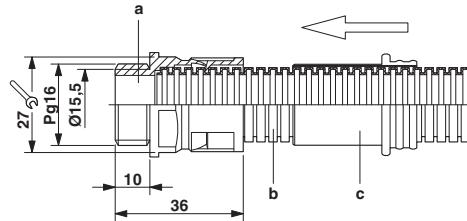| Pg screw connection	Pg16
Material	PA
Flammability rating according to UL 94	HB
Color	gray
Bending radius, static	45.00 mm

Standards and Regulations

Flammability rating according to UL 94	HB

Drawings

Protective hose - WR/PG16-50M - 1666841

Dimensional drawing

Assembly instructions for Pg16 corrugated pipe
a = Corrugated screw connection
B = Corrugated pipe
c = Opener
Installation note:
Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Spiral Wraps, Sleeves, Tubing & Conduit *category:*

Click to view products by Phoenix Contact *manufacturer:*

Other Similar products are found below :

601203-000 CTA-0053 8426-11 8429-9 8445-7.5 8450 120-104-24 120-113-16B 120-116-1-1-09BE 120-116-1-1-09BF 120-116-1-1-09BP 120-116-1-1-12BE 120-116-1-1-12BP 120-116-1-1-20BP 120-116-1-1-32BE 120-117-40 120-123-06 120-123-10 120-123-14 120-123-16 120-125-12BL 120-125-12R 120-125-16 120-125-16R 120-125-16Y 120-125-20R 120-125-24Y 120-125-28 120-125-28R 120-125-32 120-125-32R 120-125-40 120-125-56 120-126-09 120-126-09BL 120-126-12 120-126-12BL 120-126-14 120-126-16 120-126-16BL 120-126-20 120-126-20BL 120-126-20R 120-126-24 120-126-28 120-126-32 120-126-40BL 120-126-52 120-126-52BL 120-104-12