

# Contact insert - HC-A 16-ESTC-32 - 1677076

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON male insert, A16 series, 16-pos., crimp connection, numbering from 17-32



## Key Commercial Data

|              |               |
|--------------|---------------|
| Packing unit | 10 pc         |
| GTIN         |               |
| GTIN         | 4017918129699 |

## Technical data

### General

|   |   |
|---|---|
| Note                                    | For HC-D25 / HC-D 50 housing, crimp contact CK2,5-ED (crimp contacts not included in scope of supply) |
|   | Connectors may be operated only when there is no load/voltage.  |
| Connection method                       | Crimp connection  |
| Torque                                  | 0.7 Nm ... 1 Nm (PE connection)   |
|   | 0.5 Nm ... 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)                              |
| Degree of pollution                     | 3   |
| Overvoltage category                    | III   |
| Number of positions                     | 16+PE   |
| Insertion/withdrawal cycles             | ≥ 500   |
| Size                                    | D25   |
|   | D50   |
| Contact numbering                       | 17 - 32   |
| Conductor cross section                 | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup> (applies to stranded conductors)                           |
| Connection cross section AWG            | 20 ... 12   |
| Stripping length of the individual wire | 8 mm  |

# Contact insert - HC-A 16-ESTC-32 - 1677076

## Technical data

### General

|                       |   |
|-----------------------|---|
| Assembly instructions | To ensure correct use, installation in housing with IP54 protection or better is required |
|-----------------------|---|

### Ambient conditions

|                                 |  |
|---------------------------------|--|
| Ambient temperature (operation) | -40 °C ... 125 °C (including heating up of contacts) |
|---------------------------------|--|

### Material data

|                          |                       |
|--------------------------|-----------------------|
| Contact material         | Copper alloy          |
| Contact surface material | Ag (alternatively Au) |
| Contact carrier material | PA                    |

### Electrical characteristics

|                       |       |
|-----------------------|-------|
| Rated voltage (III/3) | 250 V |
| Rated surge voltage   | 4 kV  |
| Rated current         | 16 A  |

### Standards and Regulations

|  |                            |
|--|----------------------------|
| Connection in acc. with standard       | CSA                        |
| Constructional and testing regulations | DIN VDE 0627/86            |
|  | DIN VDE 0110/02.79         |
|  | DIN VDE 0110-1/04.97       |
|  | IEC 60664-1, DIN IEC 60512 |
|  | IEC 60352                  |
| Flammability rating according to UL 94 | V0                         |


### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings

## Contact insert - HC-A 16-ESTC-32 - 1677076


Schematic diagram

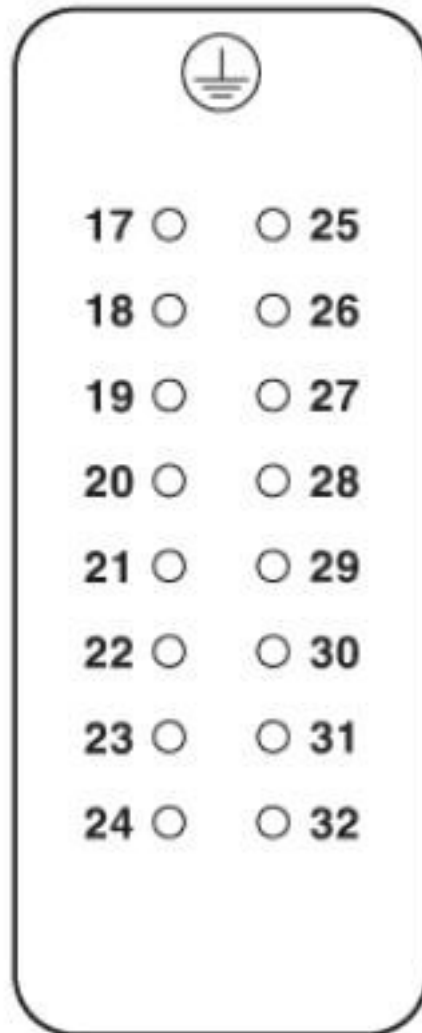

Connector pin assignment, connection side


# Contact insert - HC-A 16-ESTC-32 - 1677076

Diagram

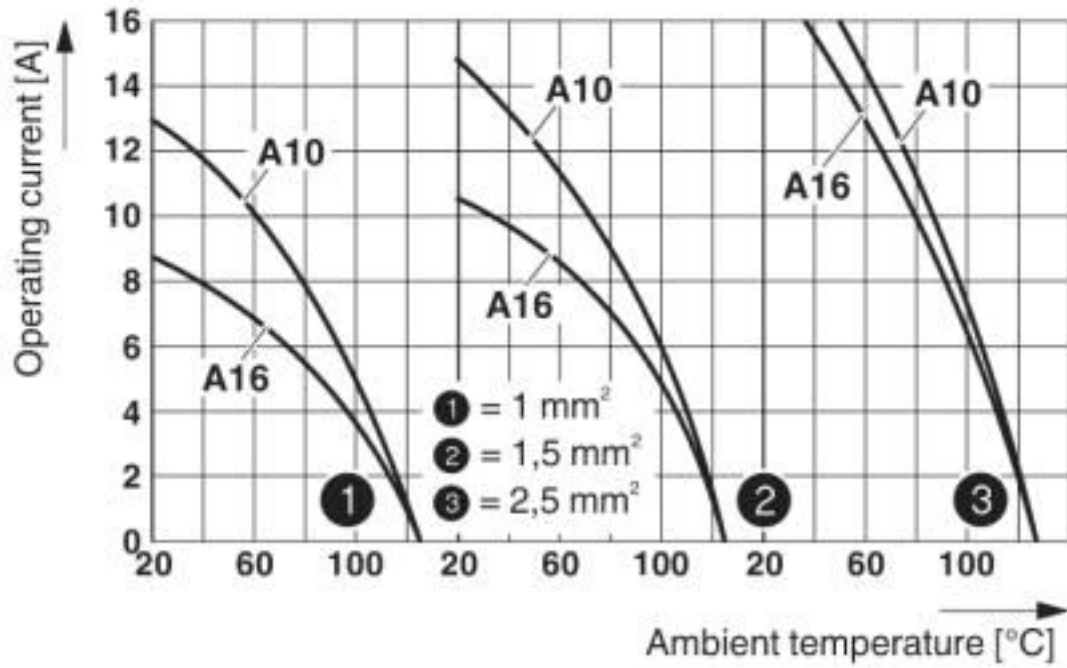

Derating diagram: HC-A...C series


Dimensional drawing

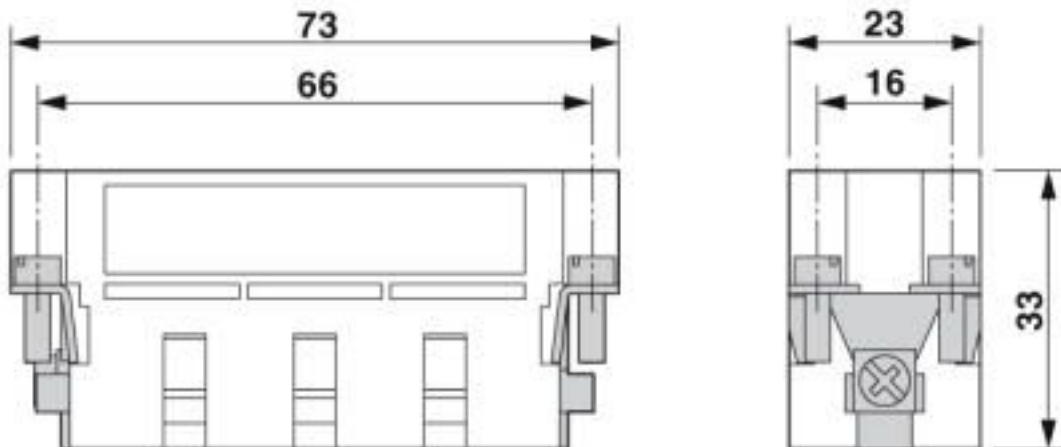

Male insert

# Contact insert - HC-A 16-ESTC-32 - 1677076

Dimensional drawing

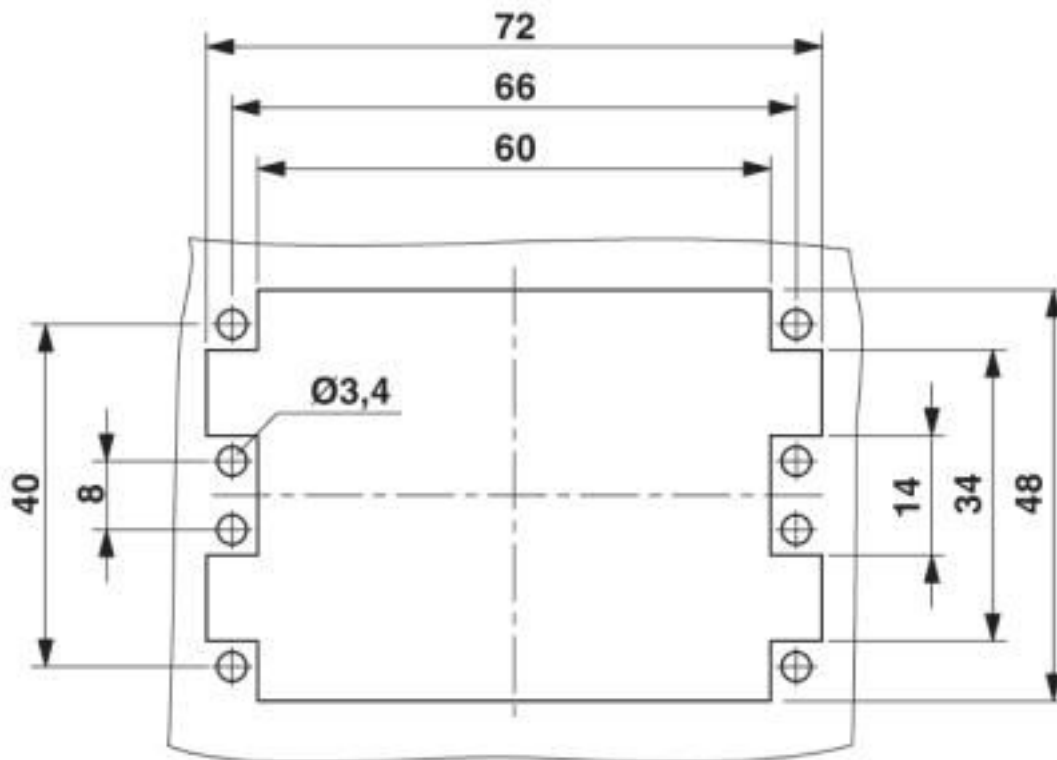

Mounting cutout when used without housing

## Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27440205 |
| eCl@ss 4.0    | 27140800 |
| eCl@ss 4.1    | 27140800 |
| eCl@ss 5.0    | 27143400 |
| eCl@ss 5.1    | 27261200 |
| eCl@ss 6.0    | 27261200 |
| eCl@ss 7.0    | 27440205 |
| eCl@ss 8.0    | 27440205 |
| eCl@ss 9.0    | 27440205 |

ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000438 |
| ETIM 3.0 | EC000438 |
| ETIM 4.0 | EC000438 |
| ETIM 5.0 | EC000438 |
| ETIM 6.0 | EC000438 |
| ETIM 7.0 | EC000438 |

# Contact insert - HC-A 16-ESTC-32 - 1677076

## Classifications

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 39121522 |
| UNSPSC 11     | 39121522 |
| UNSPSC 12.01  | 39121522 |
| UNSPSC 13.2   | 39121522 |
| UNSPSC 18.0   | 39121522 |
| UNSPSC 19.0   | 39121522 |
| UNSPSC 20.0   | 39121522 |
| UNSPSC 21.0   | 39121522 |

## Approvals


### Approvals

#### Approvals

CSA / EAC / EAC / UL Recognized / UL Recognized / cUL Recognized

#### Ex Approvals

### Approval details

|                            |   |   |        |
|----------------------------|---|---|--------|
| CSA                        |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 212533 |
| Nominal voltage UN         |   | 600 V   |        |
| Nominal current IN         |   | 10 A  |        |
| mm <sup>2</sup> /AWG/kcmil |   | 20-13   |        |

|     |   |                          |
|-----|---|--------------------------|
| EAC |  | RU C-<br>DE.AI30.B.01102 |
|-----|---|--------------------------|

|     |   |                          |
|-----|---|--------------------------|
| EAC |  | RU C-<br>DE.BL08.B.00511 |
|-----|---|--------------------------|

|               |   |   |               |
|---------------|---|---|---------------|
| UL Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 118976 |
|---------------|---|---|---------------|

# Contact insert - HC-A 16-ESTC-32 - 1677076

## Approvals

|                    |  |   |               |
|--------------------|--|---|---------------|
| UL Recognized      |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 118976 |
| Nominal voltage UN |  | 600 V   |               |

|                    |  |   |               |
|--------------------|--|---|---------------|
| cUL Recognized     |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 118976 |
| Nominal voltage UN |  | 600 V   |               |

## Accessories

### Accessories

#### Coding element

Coding element - HC-CST - 1676857



Coding peg for coding up to 16 connectors

Coding element - HC-CBU - 1676860



Coding socket for coding up to 16 connectors

Coding bolt - HC-CB - 1772722



Coding pin, prevents mismatching of up to six connectors with an identical number of positions

#### Crimp contact

## Contact insert - HC-A 16-ESTC-32 - 1677076

### Accessories

Crimp contact - CK2,5-ED-0,50ST AG - 1663572



Turned 2.5 crimp contact, individual male contact, core diameter 0.5 mm<sup>2</sup>, silver-plated

---

Crimp contact - CK2,5-ED-0,75ST AG - 1663585



Turned 2.5 crimp contact, individual male contact, core diameter 0.75 mm<sup>2</sup>, silver-plated

---

Crimp contact - CK2,5-ED-1,00ST AG - 1663598



Turned 2.5 crimp contact, individual male contact, core diameter 0.75 to 1.00 mm<sup>2</sup>, silver-plated

---

Crimp contact - CK2,5-ED-1,50ST AG - 1663608



Turned 2.5 crimp contact, individual male contact, core diameter 1.5 mm<sup>2</sup>, silver-plated

---

Crimp contact - CK2,5-ED-2,50ST AG - 1663611



Turned 2.5 crimp contact, individual male contact, core diameter 2.5 mm<sup>2</sup>, silver-plated

---



## Contact insert - HC-A 16-ESTC-32 - 1677076

### Accessories

Crimp contact - CK2,5-ED-3,00ST AG - 1663624



Turned 2.5 crimp contact, individual male contact, core diameter 3.00 mm<sup>2</sup>, silver-plated

---

Crimp contact - CK2,5-ED-4,00ST AG - 1663637



Turned 2.5 crimp contact, individual male contact, core diameter 4.00 mm<sup>2</sup>, silver-plated

---

Crimp contact - CK2,5-ED-0,50ST AU - 1674804



Turned 2.5 crimp contact, individual male contact, core diameter 0.5 mm<sup>2</sup>, gold-plated

---

Crimp contact - CK2,5-ED-1,00ST AU - 1674781



Turned 2.5 crimp contact, individual male contact, core diameter 0.75 to 1.0 mm<sup>2</sup>, gold-plated

---

Crimp contact - CK2,5-ED-1,50ST AU - 1674778



Turned 2.5 crimp contact, individual male contact, core diameter 1.5 mm<sup>2</sup>, gold-plated

---

## Contact insert - HC-A 16-ESTC-32 - 1677076

### Accessories

Crimp contact - CK2,5-ED-2,50ST AU - 1674817



Turned 2.5 crimp contact, individual male contact, core diameter 2.5 mm<sup>2</sup>, gold-plated

---

Crimp contact - CK2,5-ED-4,00ST AU - 1674794



Turned 2.5 crimp contact, individual male contact, core diameter 4.00 mm<sup>2</sup>, gold-plated

---

### Mounting material

Screw - HC-A-PES - 1584868



PE screw for contact inserts of A series

---

### Additional products

Contact insert - HC-A 16-EBUC-32 - 1677050



HEAVYCON female insert, A16 series, 16-pos., crimp connection, numbering from 17 ... 32

---

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heavy Duty Power Connectors](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)  
[6651788-1](#) [696475-1](#) [702-32-01109](#) [703-25-02205](#) [73000005059](#) [73000005642](#) [765-15-0080A](#) [765-16-0080B](#) [765-18-0080D](#) [829992-1](#)  
[902-77-02113](#) [PS00/A0620/6300](#) [129-1J](#) [1409400](#) [AN0024023](#) [E6374G1](#) [e6389g2](#) [157-43GW8](#) [MS3117-14AC](#) [1643543-1](#) [1650540-1](#)  
[1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [NLS-2-R-C240-](#)  
[M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#) [KA8102](#) [9300480317](#) [SBS50BRN#6](#) [29131](#)