

# Contact insert module - HC-M-02-MOD-BU - 1679359


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON contact insert module, female, 2-pos., axial screw connection

RoHS

## Key Commercial Data

Packing unit	2 pc
Minimum order quantity	2 pc
GTIN	 4 017918 162535
GTIN	4017918162535

## Technical data

### Dimensions

Height	40.6 mm
Width	34.2 mm
Length	14.6 mm

### Electrical characteristics

Rated voltage (III/3)	1000 V
Rated current	40 A
Rated surge voltage	8 kV
Connection profile	2

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

### Mechanical characteristics

Conductor cross section	2.5 mm <sup>2</sup> ... 8 mm <sup>2</sup> (The cross section specification refers to the geometric cross section of the cable used)
Connection cross section AWG	12 ... 10
Stripping length of the individual wire	8 mm +1 (for 6 mm <sup>2</sup> )
	5 mm +1 (For 2.5 mm <sup>2</sup> ... 4 mm <sup>2</sup> )

# Contact insert module - HC-M-02-MOD-BU - 1679359

## Technical data

### Mechanical characteristics

	11 mm +1 (for 8 mm <sup>2</sup> )
Tightening torque	1.5 Nm (2.5 mm <sup>2</sup> ... 4 mm <sup>2</sup> )
	2 Nm (6 -8 mm <sup>2</sup> )
Wire diameter including insulation	6 mm (6 mm <sup>2</sup> )
	10.5 mm (8 mm <sup>2</sup> )
	4 mm (2.5 mm <sup>2</sup> ... 4 mm <sup>2</sup> )
Hexagonal socket	WAF 2
Insertion/withdrawal cycles	≥ 500

### General

Note	For HEAVYCON housing type B6 to B48, HC-M-MHR... hinged retaining frame required
Series	HC-M-02
Number of module slots	1
Connection method	Axial screw connection
Connection in acc. with standard	IEC / EN
Flammability rating according to UL 94	V0
Degree of pollution	3
Overvoltage category	III
Assembly instructions	<ul style="list-style-type: none"> <li>- Connection of the wires using a 2 mm Allen wrench.</li> <li>- Housing height ≥ 52 mm.</li> <li>- Axial screw connection only for flexible wires.</li> <li>- Plug-in connections may only be operated only when there is no load/voltage.</li> </ul>
Connection	<p>Note regarding axial connection technology:                      Only for stranded wires. The conductor cross sections stated refer to the geometric cross section of the cable used.                      Use of cables with a geometric cross section very different from that of the cable's nominal cross section should be checked before use.                      The wiring space of the axial screw method is designed for fine strand cables according to VDE 0295 class 5. Deviating cable structures (e.g. class 6 cables) should be checked before use.</p> <p>Connection                      Before starting to connect, ensure that the tapered screw is turned back all the way (chamber is open). The cables must not be twisted. The cores should be slid to the limit stop in the contact chamber (until insulation touches contact). Hold cores in position and use socket wrench to tighten. The used core end should be cut off before connecting again. The connection screw may only be retightened once to prevent the strands from breaking. To prevent damage to the contact, the core / cable should be mechanically intercepted at an appropriate distance from the connection point (e.g. by using a plate cutout). DIN VDE 0100-520:2003-06 contains information on how to do this correctly.</p>

### Material data

Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC

### Standards and Regulations

# Contact insert module - HC-M-02-MOD-BU - 1679359

## Technical data

### Standards and Regulations


Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings


Schematic diagram

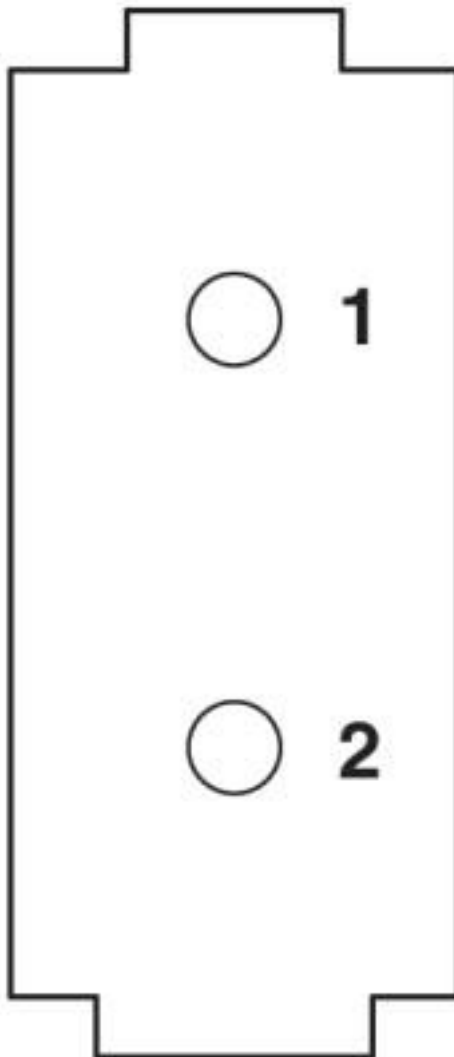

Connector pin assignment

# Contact insert module - HC-M-02-MOD-BU - 1679359


Diagram

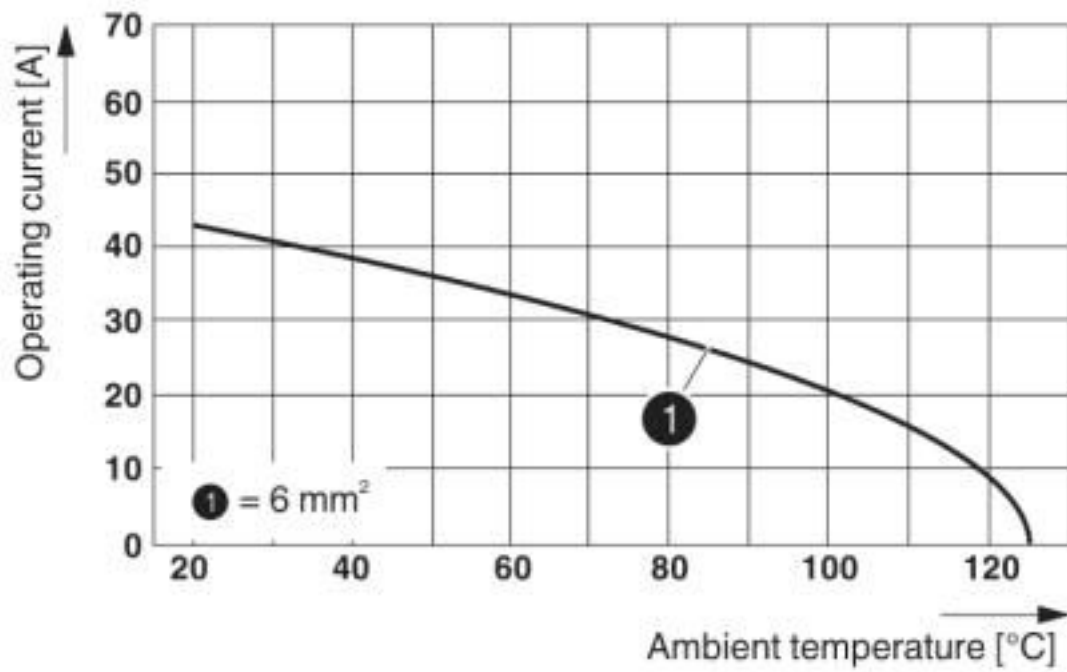

Derating diagram (6 modules in HC-B 24 housing)


## Contact insert module - HC-M-02-MOD-BU - 1679359

Dimensional drawing

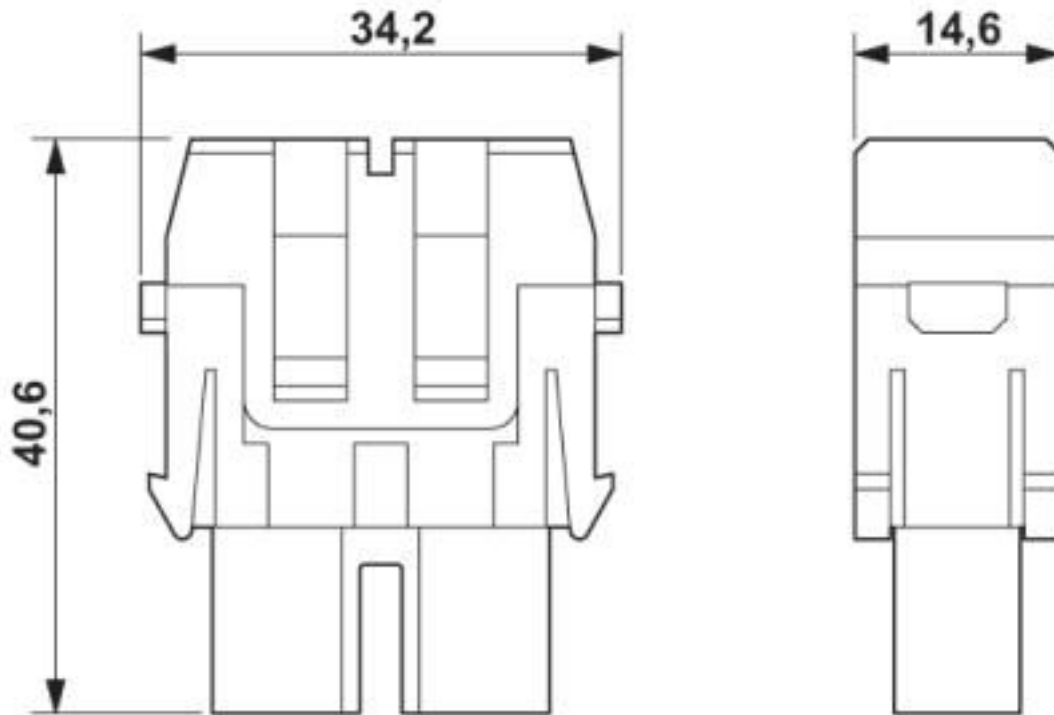

Female insert

Schematic diagram

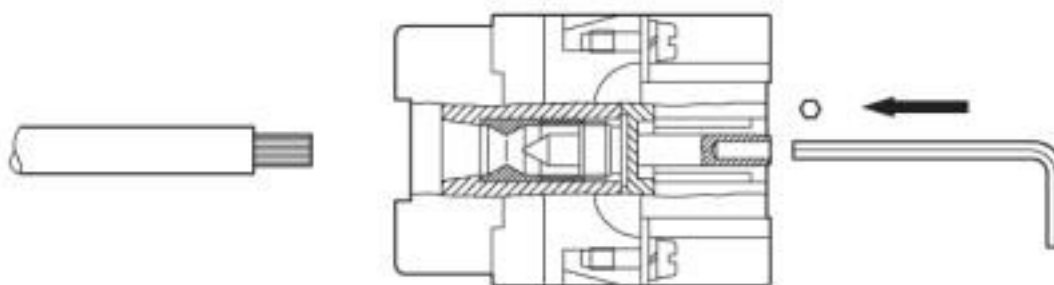

Axial connection (2 mm Allen key)

### Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27261200
eCl@ss 6.0	27261200
eCl@ss 7.0	27440205

## Contact insert module - HC-M-02-MOD-BU - 1679359

### Classifications

#### eCl@ss

eCl@ss 8.0	27440205
eCl@ss 9.0	27440217

#### ETIM

ETIM 2.0	EC000438
ETIM 3.0	EC000438
ETIM 4.0	EC000438
ETIM 5.0	EC000438
ETIM 6.0	EC000438

#### UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522
UNSPSC 19.0	39121522

### Accessories

#### Accessories

#### Mounting material

Cable lug - HC-M-MHR-PE16 - 1636981



Cable lug for HEAVYCON-MODULAR; PE connection extension to 16 mm<sup>2</sup>, for crimping with crimp pliers

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heavy Duty Power Connectors](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[647757-1](#) [6643411-1](#) [6646058-2](#) [6646137-1](#) [6646138-1](#) [6646479-1](#) [6646608-1](#) [6646786-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#)  
[6651788-1](#) [696475-1](#) [702-32-01109](#) [703-25-02205](#) [73000005059](#) [73000005642](#) [73080255059](#) [73080965046](#) [765-15-0080A](#) [765-16-0080B](#)  
[765-18-0080D](#) [829992-1](#) [902-77-02113](#) [PS00/A0620/6300](#) [PS25/A0420/63](#) [129-1J](#) [1409400](#) [AN0024023](#) [E6374G1](#) [e6389g2](#) [157-43GW8](#)  
[MS3117-14AC](#) [1643543-1](#) [1650540-1](#) [1651811-2](#) [1766260-1](#) [1766282-1](#) [1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-](#)  
[W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [1986615-1](#) [2-1589900-8](#) [2199314-1](#) [KA8102](#)