

# Printed-circuit board connector - PTF 0,3/ 4-WB-8-H - 1707561

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled PCB connectors

The figure shows version

## Your advantages

- Tool-free fast connection for flexible PCBs
- Small component size for applications where space is at a premium
- Reliable contacting of flexible PCBs, thanks to fixing pin
- Designed and tested according to IEC 60838-2-2



## Key Commercial Data

Packing unit	20 pc
Minimum order quantity	20 pc
GTIN	
GTIN	4046356934244

## Technical data

### Item properties

Brief article description	Cable set
Plug-in system	COMBICON COMPACT PTF
Type of contact	Female connector
Range of articles	PTF 0,3/...-WB-H
Pitch	1.8 mm
Number of positions	4
Connection method	Crimp connection
Mounting type	Direct plug-in method
Number of levels	1
Number of connections	4
Number of potentials	4

# Printed-circuit board connector - PTF 0,3/ 4-WB-8-H - 1707561

## Technical data

### Electrical parameters

Nom. voltage	< 25 V
Rated voltage	25 V

### Dimensions for the product

Length [ l ]	9.80 mm
Pitch	1.80 mm

### Header 1

Insulating material	PBT
CTI according to IEC 60112	275

### Packaging information

Pieces per package	20
Denomination packing units	Pcs.

### Ambient conditions

Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (operation)	-30 °C ... 100 °C (dependent on the derating curve)

### Air clearances and creepage distances

Clearances and creepage distances	IEC 60838-1:2004-10 + AMD 1:2008-07 + AMD 2:2011-03
Specification	IEC 60838-1:2004-10 + AMD 1:2008-07 + AMD 2:2011-03

### Temperature-rise test

Specification	IEC 60838-1:2004-10 + AMD 1:2008-07 + AMD 2:2011-03
Result	Test passed
Requirement temperature-rise test	Increase in temperature ≤ 45 K

### Vibration test

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 500 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2 h

### Glow-wire test

Specification	IEC 60695-2-11:2000-10
Result	Test passed
Temperature	650 °C
Time of exposure	30 s

### Needle flame test

Specification	IEC 60695-11-5:2004-12
Result	Test passed

# Printed-circuit board connector - PTF 0,3/ 4-WB-8-H - 1707561

## Technical data

### Needle flame test


Time of exposure	10 s
------------------	------

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


## Drawings

Drilling diagram

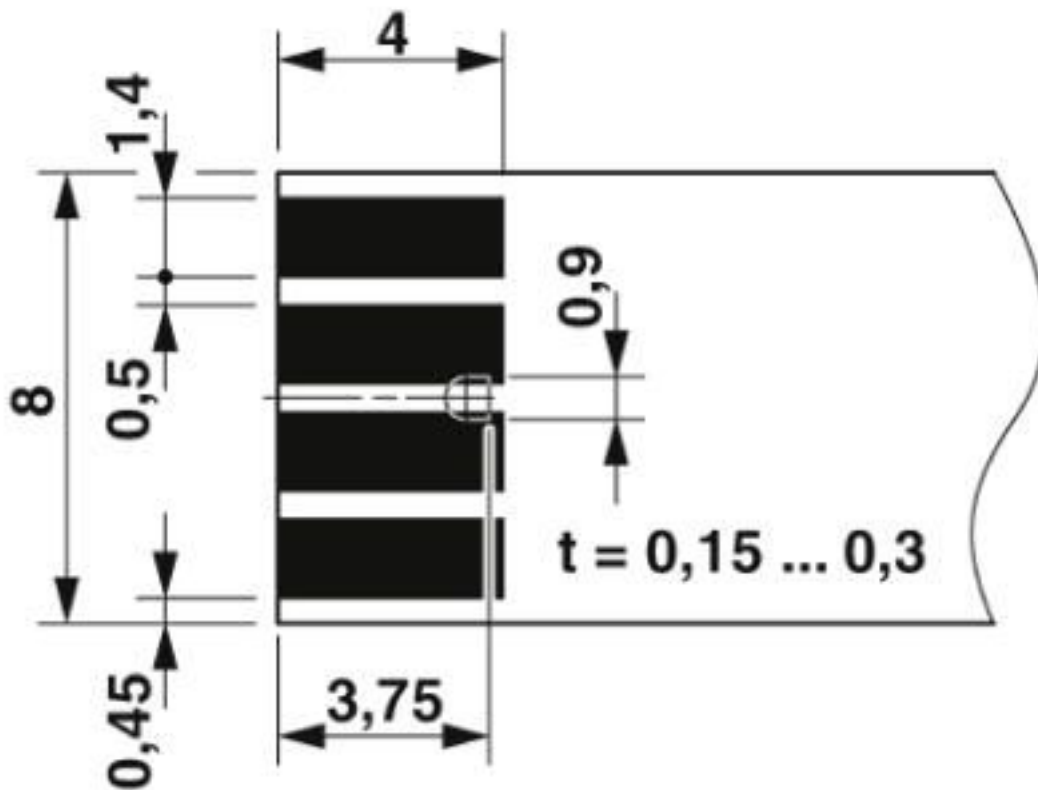


# Printed-circuit board connector - PTF 0,3/ 4-WB-8-H - 1707561

Diagram

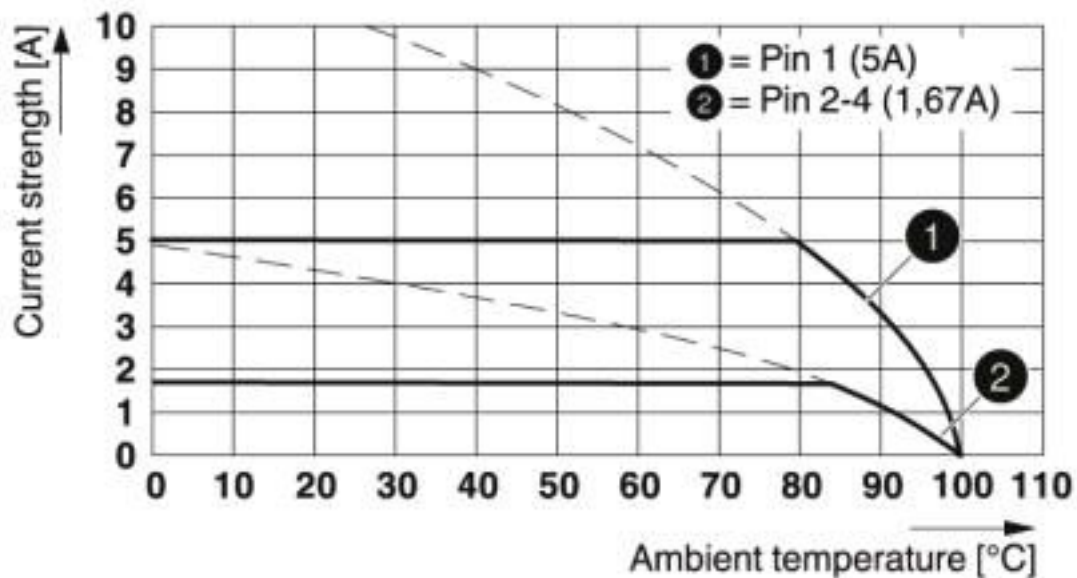

Type: PTF 0,3/ 4-WB-8-H

Dimensional drawing

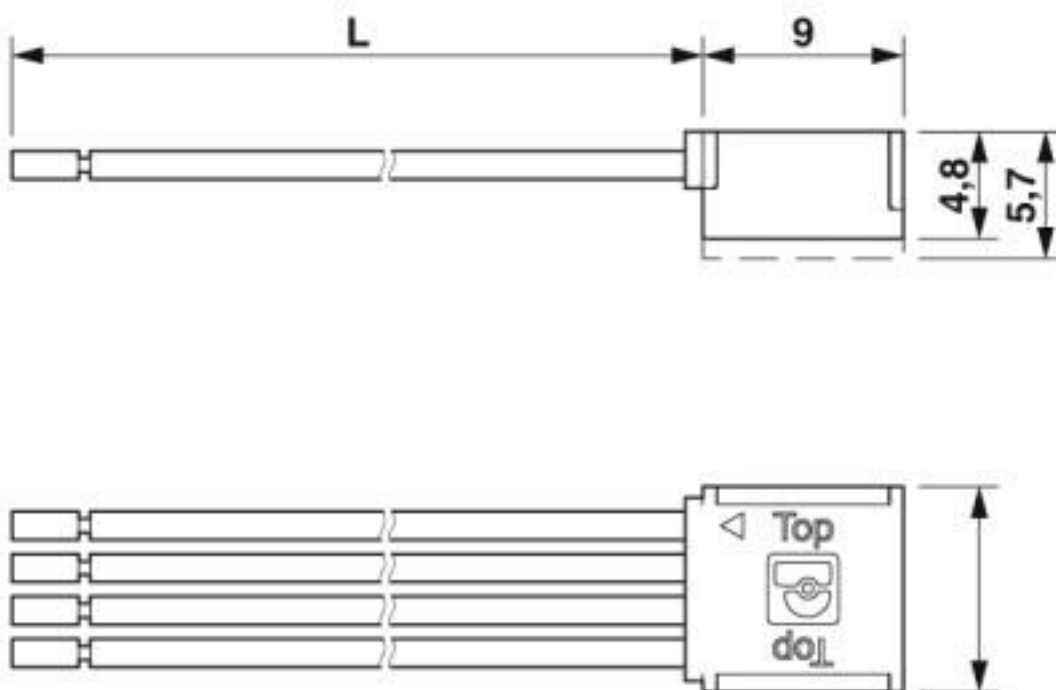

## Classifications

eCl@ss

eCl@ss 10.0.1	27440309
---------------	----------

# Printed-circuit board connector - PTF 0,3/ 4-WB-8-H - 1707561

## Classifications

### eCl@ss

eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440309
eCl@ss 8.0	27440309
eCl@ss 9.0	27440309

### ETIM

ETIM 4.0	EC002643
ETIM 5.0	EC002638
ETIM 6.0	EC002638
ETIM 7.0	EC002638

### UNSPSC

UNSPSC 13.2	39121409
UNSPSC 18.0	39121409
UNSPSC 19.0	39121409
UNSPSC 20.0	39121409
UNSPSC 21.0	39121409

## Approvals

### Approvals

---

#### Approvals


UL Recognized / EAC

---

#### Ex Approvals

---

### Approval details

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> E118976-20130430
Nominal voltage UN	60 V	
Nominal current IN	5 A	
mm <sup>2</sup> /AWG/kcmil	22	

## Printed-circuit board connector - PTF 0,3/ 4-WB-8-H - 1707561

### Approvals

EAC



B.01687

### Accessories

#### Additional products

Printed-circuit board connector - PTF 0,3/ 4-BB-8-H - 1707559



PCB connector, rated voltage (III/2): 25 V, nominal cross section: 0.34 mm<sup>2</sup>, pitch: 1.9 mm, number of positions: 4, mounting: Direct plug-in method, color: white. For flexible PCBs with a width of 8 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

Printed-circuit board connector - PTF 0,3/ 2-WB-8-H - 1707558




Assembled PCB connectors

PCB - PTF 0,3/ 4-FLEX-I-8 - 1848477



PCB direct plug, number of positions: 4, pitch: 1.8 mm, color: white

PCB - PTF 0,3/ 4-FLEX-L-8 - 1848480



PCB direct plug, nominal cross section: 0.34 mm<sup>2</sup>, number of positions: 4, pitch: 1.8 mm, color: white, mounting: Direct plug-in method

## Printed-circuit board connector - PTF 0,3/ 4-WB-8-H - 1707561

### Accessories

PCB - PTF 0,3/ 4-FLEX-T-8 - 1848493

PCB direct plug, number of positions: 4, pitch: 1.8 mm, color: white



---

Printed-circuit board connector - PTSM 0,5/ 4-P-2,5 - 1778858



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 4, pitch: 2.5 mm, connection method: Push-in spring connection, color: black, contact surface: Tin

---

Printed-circuit board connector - PTSM 0,5/ 4-P-2,5 WH - 1704857



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 4, pitch: 2.5 mm, connection method: Push-in spring connection, color: white, contact surface: Tin

---

Printed-circuit board connector - PTSM 0,5/ 4-PI-2,5 BK - 1709437



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 4, pitch: 2.5 mm, connection method: Push-in spring connection, color: black, contact surface: Tin

---

Printed-circuit board connector - PTSM 0,5/ 4-PI-2,5 WH - 1709452



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 4, pitch: 2.5 mm, connection method: Push-in spring connection, color: white, contact surface: Tin

## Printed-circuit board connector - PTF 0,3/ 4-WB-8-H - 1707561

### Accessories

Printed-circuit board connector - PTSM 0,5/ 4-PL-2,5 WH - 1709460



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 4, pitch: 2.5 mm, connection method: Push-in spring connection, color: white, contact surface: Tin

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Lighting Cables](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[CL2-EXTEND](#) [96CB-E0605HAA1](#) [ZWF-915-J](#) [68801-4899](#) [68801-2112](#) [68801-2123](#) [68801-4124](#) [68801-4752](#) [68801-4850](#) [ZFS-CH144-12I](#) [96CB-E0405PCA3](#) [96CB-E0405PIC3](#) [96CB-E0605HAB1](#) [SSL11-J2LJ0-022A04](#) [CNXBE4218](#) [1-2058943-7](#) [1-2058943-8](#) [1-2083075-2](#) [1-2083080-1](#) [CNX310-120-X4124](#) [CNX\\_C\\_E\\_4\\_2\\_08](#) [CNXBE4118](#) [CNX\\_310\\_012\\_E\\_4\\_1\\_12](#) [2702306](#) [2702307](#) [SSL12-J4FJ0-000001](#) [180888-0405](#) [SSL12-J2LJ0-020F01](#) [180887-0430](#) [1705131](#) [180887-0410](#) [180778-0405](#) [1-2083029-8](#) [SSL12-J4LJ0-020H01](#) [180778-0430](#) [SSL12-P4LP0-M20H01](#) [SSL12-P4LP0-M20F01](#) [SSL12-P2LP0-M20F01](#) [SSL12-J4LJ0-020F01](#) [SSL11-J2LJ0-B22A04](#) [68801-4037](#) [68801-4039](#) [68801-4053](#) [68801-4055](#) [68801-4057](#) [68801-4059](#) [68801-4061](#) [960026](#) [2-2083030-2](#) [SSL12-J2LJ0-020A04](#)