

## Printed-circuit board connector - PTF 0,3/ 2-WB-10-H - 1707562

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Assembled PCB connectors

### Your advantages

- ✓ Tool-free fast connection for flexible PCBs
- ✓ Small component size for applications where space is at a premium
- ✓ Reliable contacting of flexible PCBs, thanks to fixing pin
- ✓ Designed and tested according to IEC 60838-2-2
- ✓ Approval in accordance with UL 1977 demonstrates electrical safety for use in the North American market



### Key Commercial Data

Packing unit	20 pc
Minimum order quantity	20 pc
GTIN	 4 046356 934220
GTIN	4046356934220

### Technical data

#### Dimensions

Length [ l ]	9.00 mm
Pitch	2.40 mm


#### General

Range of articles	PTF 0,3/..-WB-H
Type of contact	Female connector
Number of positions	2
Connection method	Crimp connection
Rated voltage (III/2)	25 V
Nominal cross section	0.34 mm <sup>2</sup>
Insulating material	PBT




# Printed-circuit board connector - PTF 0,3/ 2-WB-10-H - 1707562

Diagram

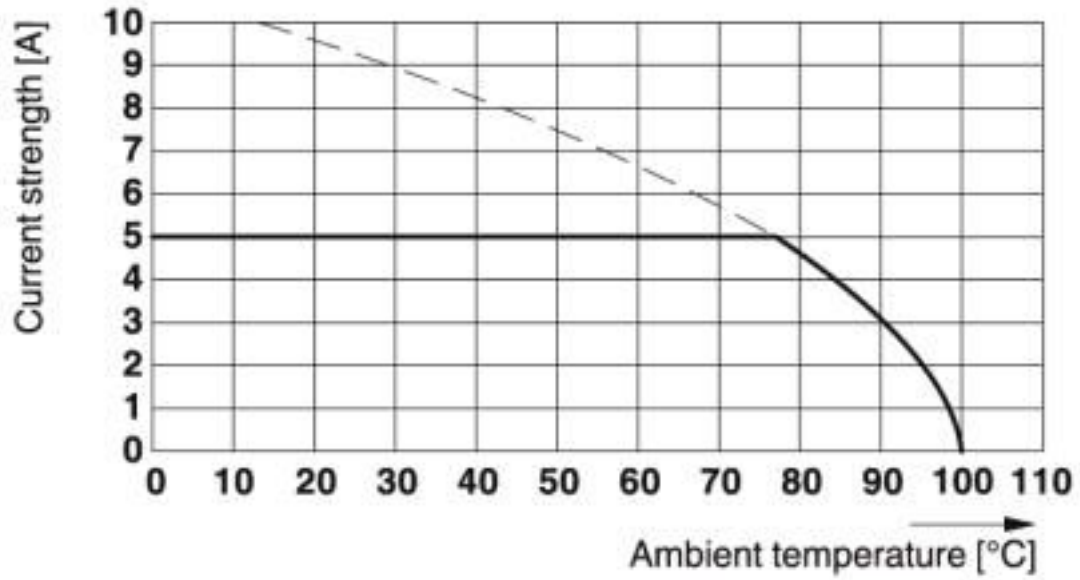

Type: PTF 0,3/ 2-WB-10-H

Dimensional drawing

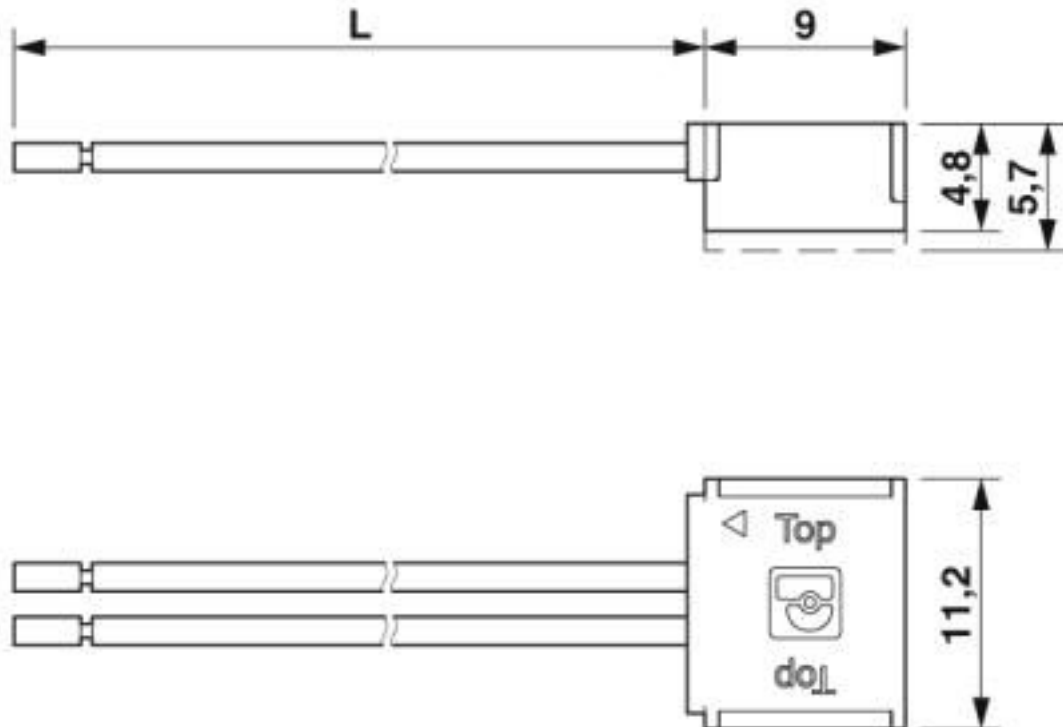

# Printed-circuit board connector - PTF 0,3/ 2-WB-10-H - 1707562

## Classifications

### eCl@ss

eCl@ss 10.0.1	27440309
eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440309
eCl@ss 8.0	27440309
eCl@ss 9.0	27440309

### ETIM

ETIM 4.0	EC002643
ETIM 5.0	EC002638
ETIM 6.0	EC002638
ETIM 7.0	EC002638

### UNSPSC

UNSPSC 13.2	39121432
UNSPSC 18.0	39121409
UNSPSC 19.0	39121409
UNSPSC 20.0	39121409
UNSPSC 21.0	39121409

## Approvals


### Approvals

#### Approvals

UL Recognized / EAC

#### Ex Approvals

### Approval details

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> E118976-20130430
Nominal voltage UN	60 V	
Nominal current IN	5 A	

## Printed-circuit board connector - PTF 0,3/ 2-WB-10-H - 1707562

### Approvals

mm²/AWG/kcmil	22
---------------	----

EAC		B.01687
-----	--	---------

### Accessories

#### Additional products

Printed-circuit board connector - PTF 0,3/ 4-BB-10-H - 1707563



PCB connector, rated voltage (III/2): 25 V, nominal cross section: 0.34 mm², number of positions: 4, pitch: 2.4 mm, color: white, contact surface: Tin, mounting: Direct plug-in method, For flexible PCBs with a width of 10 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

Printed-circuit board connector - PTF 0,3/ 4-WB-10-H - 1707565



Assembled PCB connectors

PCB - PTF 0,3/ 4-FLEX-I-10 - 1848503



PCB direct plug, number of positions: 4, pitch: 1.8 mm, color: white

PCB - PTF 0,3/ 4-FLEX-L-10 - 1848516



PCB direct plug, nominal cross section: 0.34 mm², number of positions: 4, pitch: 1.8 mm, color: white, mounting: Direct plug-in method

## Printed-circuit board connector - PTF 0,3/ 2-WB-10-H - 1707562

### Accessories

PCB - PTF 0,3/ 4-FLEX-T-10 - 1848529

PCB direct plug, number of positions: 4, pitch: 1.8 mm, color: white



Printed-circuit board connector - PTSM 0,5/ 2-P-2,5 - 1778832



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 2, pitch: 2.5 mm, connection method: Push-in spring connection, color: black, contact surface: Tin

---

Printed-circuit board connector - PTSM 0,5/ 2-P-2,5 WH - 1704853



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 2, pitch: 2.5 mm, connection method: Push-in spring connection, color: white, contact surface: Tin

---

Printed-circuit board connector - PTSM 0,5/ 2-PI-2,5 BK - 1709435



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 2, pitch: 2.5 mm, connection method: Push-in spring connection, color: black, contact surface: Tin

---

Printed-circuit board connector - PTSM 0,5/ 2-PI-2,5 WH - 1709450



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 2, pitch: 2.5 mm, connection method: Push-in spring connection, color: white, contact surface: Tin

---

## Printed-circuit board connector - PTF 0,3/ 2-WB-10-H - 1707562

### Accessories

Printed-circuit board connector - PTSM 0,5/ 2-PL-2,5 WH - 1709457



PCB connector, nominal current: 6 A, rated voltage (III/2): 160 V, nominal cross section: 0.5 mm<sup>2</sup>, number of positions: 2, pitch: 2.5 mm, connection method: Push-in spring connection, color: white, contact surface: Tin

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Lighting Cables](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[CL2-EXTEND](#) [96CB-E0605HAA1](#) [ZWF-915-J](#) [68801-4899](#) [68801-2112](#) [68801-2123](#) [68801-4124](#) [68801-4752](#) [68801-4850](#) [ZFS-CH144-12I](#) [96CB-E0405PCA3](#) [96CB-E0405PIC3](#) [96CB-E0605HAB1](#) [SSL11-J2LJ0-022A04](#) [CNXBE4218](#) [1-2058943-7](#) [1-2058943-8](#) [1-2083075-2](#) [1-2083080-1](#) [CNX310-120-X4124](#) [CNX\\_C\\_E\\_4\\_2\\_08](#) [CNXBE4118](#) [CNX\\_310\\_012\\_E\\_4\\_1\\_12](#) [2702306](#) [2702307](#) [SSL12-J4FJ0-000001](#) [180888-0405](#) [SSL12-J2LJ0-020F01](#) [180887-0430](#) [1705131](#) [180887-0410](#) [180778-0405](#) [1-2083029-8](#) [SSL12-J4LJ0-020H01](#) [180778-0430](#) [SSL12-P4LP0-M20H01](#) [SSL12-P4LP0-M20F01](#) [SSL12-P2LP0-M20F01](#) [SSL12-J4LJ0-020F01](#) [SSL11-J2LJ0-B22A04](#) [68801-4037](#) [68801-4039](#) [68801-4053](#) [68801-4055](#) [68801-4057](#) [68801-4059](#) [68801-4061](#) [960026](#) [2-2083030-2](#) [4767](#)