

PCB connector - FRONT-FMC 1,5/D32-FF-6,35-R - 1714765

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB headers, nominal current: 6 A, rated voltage (III/2): 320 V, nominal cross section: 1.5 mm², number of positions: 32, pitch: 6.35 mm, connection method: Push-in spring connection, color: light gray, contact surface: Tin, pin layout: Linear pinning



Your advantages

- Time saving push-in connection, tools not required
- Defined contact force ensures that contact remains stable over the long term
- Intuitive use through colour coded actuation lever
- Operation and conductor connection from one direction enable integration into front of device
- Screwable flange for superior mechanical stability



Key Commercial Data

Packing unit	20 pc
Minimum order quantity	500 pc
GTIN	
GTIN	4055626387789

Technical data

Dimensions

Length [l]	17.27 mm
Width [w]	129.93 mm
Height [h]	26 mm
Pitch	6.35 mm
Dimension a	92.25 mm

General

Range of articles	FRONT-FMC 1,5/...-FF
Number of positions	32
Nominal cross section	1.5 mm ²

Environmental Product Compliance

PCB connector - FRONT-FMC 1,5/D32-FF-6,35-R - 1714765


Technical data

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Diagram

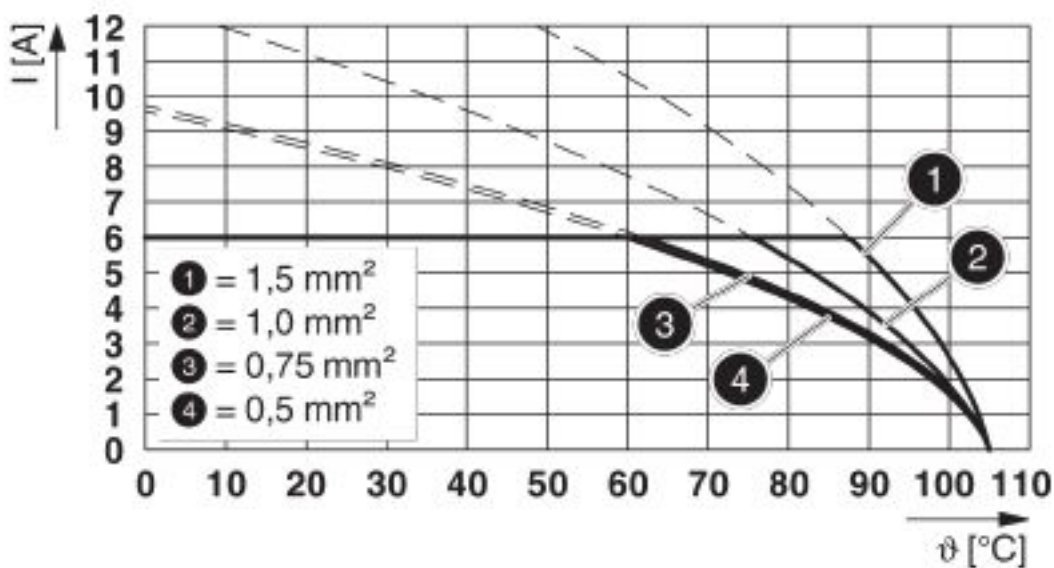

Type: FRONT-FMC 1,5/D...-FF-6,35-R with FRONT-FMC 1,5/D...-MF-6,35

Classifications

eCl@ss

eCl@ss 10.0.1	27440402
eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440309
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 5.0	EC002637
ETIM 6.0	EC002637
ETIM 7.0	EC002637

PCB connector - FRONT-FMC 1,5/D32-FF-6,35-R - 1714765

Accessories

Additional products

Feed-through header - FRONT-FMC 1,5/D32-MF-6,35 - 1714763

PCB headers, nominal current: 6 A, rated voltage (III/2): 320 V, nominal cross section: 1.5 mm², number of positions: 32, pitch: 6.35 mm, color: light gray, contact surface: Tin, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3 mm



Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [734-104](#) [734-302](#) [8-141-P](#) [8426620000](#) [860505](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#)
[PVP02-5,00](#) [PVP03-3,50](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFH16150](#) [ELFP03110](#)
[ELFP10210](#) [ELFT06250](#) [ELVP03100](#) [1700101](#) [1700410](#) [1700425](#) [1702246](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#)
[1734692](#) [1734795](#) [1736036](#) [1740194](#) [1740291](#) [1740628](#) [1740990](#) [1746952](#) [1750207](#) [1752441](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#)
[1760051](#) [1760336](#)