

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



EMC shield adapter, for EMC connector, type 4, number of insert modules 5



## **Key Commercial Data**

Packing unit	5 pc
Minimum order quantity	5 pc
GTIN	4 017918 127121
GTIN	4017918127121

#### Technical data

#### General

Note	For painted surfaces with conductive panel cutout
Size	VC4

#### Material data

Housing material	PA 6.6
Contact material	CuZn
Contact surface material	Nickel-plated

### Standards and Regulations

Halogen-free	yes
Connection in acc. with standard	CUL
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes.



# Technical data

### Standards and Regulations


The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
The products are suitable for applications in plant, controller, and electrical device engineering.
When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
Assembled products may not be manipulated or improperly opened.
Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
When using the product in direct connection with third-party manufacturers, the user is responsible.
• For operating voltages > 50 V AC, conductive connector housings must be grounded
Ensure that the protective or functional ground has been properly connected.
VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
Observe the corresponding technical data. You will find information: o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product
Only use tools recommended by Phoenix Contact
The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.
Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
Operate the connector only when it is fully plugged in.
Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
Observe the minimum bending radius of the cable. Lay the cable without twisting it.

## **Environmental Product Compliance**

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# Drawings



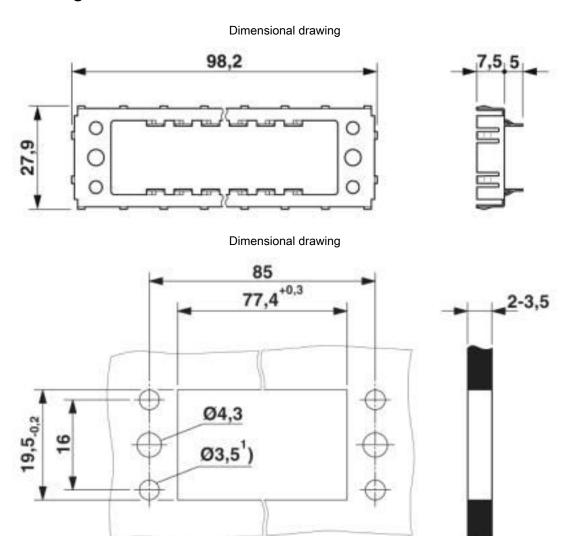

## Classifications

## eCl@ss

eCl@ss 10.0.1	27440210
eCl@ss 4.0	27140800
eCl@ss 4.1	27140800
eCl@ss 5.0	27371200
eCl@ss 5.1	27371200
eCl@ss 6.0	27261200
eCl@ss 7.0	27440210
eCl@ss 8.0	27440210
eCl@ss 9.0	27440210

### **ETIM**

ETIM 2.0	EC000437
ETIM 3.0	EC000437



## Classifications

#### **ETIM**

ETIM 4.0	EC000437
ETIM 5.0	EC002310
ETIM 6.0	EC002310
ETIM 7.0	EC002310

#### **UNSPSC**

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	39121421
UNSPSC 18.0	39121421
UNSPSC 19.0	39121421
UNSPSC 20.0	39121421
UNSPSC 21.0	39121421

# Approvals

#### Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

### Approval details

UL Recognized http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 118976

cUL Recognized http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 118976

EAC B.01742



## Approvals

cULus Recognized



Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heavy Duty Power Connectors category:

Click to view products by Phoenix Contact manufacturer:

Other Similar products are found below:

647757-1 6643411-1 6646058-2 6646137-1 6646138-1 6646479-1 6646608-1 6646786-1 6646940-1 6651091-1 6651525-1 6651529-1 6651788-1 696475-1 702-32-01109 703-25-02205 73000005059 73000005642 73080255059 73080965046 765-15-0080A 765-16-0080B 765-18-0080D 829992-1 902-77-02113 PS00/A0620/6300 PS25/A0420/63 129-1J 1409400 AN0024023 E6374G1 e6389g2 157-43GW8 MS3117-14AC 1643543-1 1650540-1 1651811-2 1766260-1 1766282-1 1766966-1 1791340000 NLDFT-3-BL-L-S120-M40A NLDFT-N-W-L-C240-M40B NLS-2-R-C240-M40B NLS-N-W-C240-M40B NPS-3-BL-T6 1986615-1 2-1589900-8 2199314-1 KA8102