

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Half screw connection Pg21, made of plastic, consisting of rubber seal with several holes (2 x 6 mm/2 x 8 mm) and a pressure screw, for cable screw connection support VC-M-KV-PG21......



### **Key Commercial Data**

Packing unit	5 pc
GTIN	4 017918 176655
GTIN	4017918176655

### Technical data

#### **Dimensions**

Length	31.1 mm
Wrench size, union nut	33 mm
External cable diameter	5.5 mm 6 mm (Cable 1)

#### Ambient conditions

Degree of protection (IP)	IP65
Ambient temperature (operation)	-20 °C 100 °C

#### General

Type of the screw connection	Half screw connection
No. of conductors	4
Material, pressure screw	Polyamide
Seal material	TPE
Sealing material	TPE
Shielded	no
Thread type on seal side	Pg21
Tightening torque, union nut	7.50 Nm

#### Standards and Regulations




### Technical data


### Standards and Regulations

Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the production.
	The products are suitable for applications in plant, controller, and electrical device engineering.
	When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
	Assembled products may not be manipulated or improperly opened.
	Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
	When using the product in direct connection with third-party manufacturers, the user is responsible.
	For operating voltages > 50 V AC, conductive connector housings must be grounded
	Ensure that the protective or functional ground has been properly connected.
	VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	Observe the corresponding technical data. You will find information:     o On the product     o On the packing label     o In the supplied documentation     o Online at phoenixcontact.com/products under the product
	Only use tools recommended by Phoenix Contact
	The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.
	Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
	Operate the connector only when it is fully plugged in.
	Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
	Observe the minimum bending radius of the cable. Lay the cable without twisting it.

Drawings





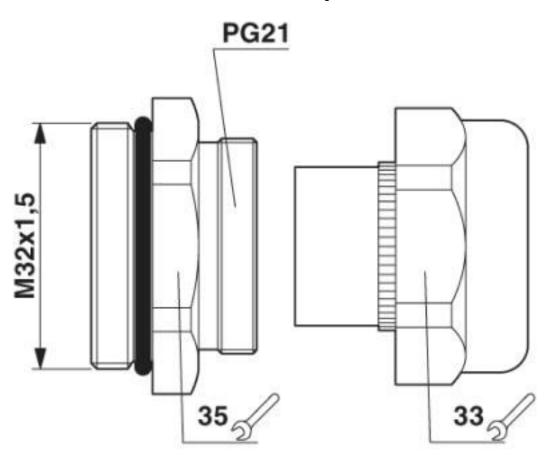

### Classifications

### eCl@ss

eCl@ss 10.0.1	27144432
eCl@ss 4.0	27141200
eCl@ss 4.1	27141200
eCl@ss 5.0	27149100
eCl@ss 5.1	27149100
eCl@ss 6.0	27149100
eCl@ss 7.0	27149109
eCI@ss 8.0	27149109
eCl@ss 9.0	27144432

### **ETIM**

ETIM 2.0	EC000441
ETIM 3.0	EC000441
ETIM 4.0	EC000441
ETIM 5.0	EC000441
ETIM 6.0	EC000441



### Classifications

	_,	
		1\ /
_		IV

ETIM 7.0	EC000441
UNSPSC	
UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	39121311
UNSPSC 18.0	39121311
UNSPSC 19.0	39121311
UNSPSC 20.0	39121311
UNSPSC 21.0	39121311

### Approvals

Approvals

Approvals

EAC

Ex Approvals

### Approval details

EAC [A[

B.01687

### Accessories

Accessories

Half screw connection

Cable gland - VC-K-KV-PG21-O - 1885363



Half screw connection made of plastic with rubber seal without hole or for individual holes



Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300

Fax +49 5235 3 41200

http://www.phoenixcontact.com

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Cable Mounting & Accessories category:

Click to view products by Phoenix Contact manufacturer:

Other Similar products are found below:

582603-1 009333-000 727844N003 747 809090N001 843188-000 8666 967279N002 DB-11 1300840039 1300900096 1301800416

1302264450 1300830184 1300830729 1300900039 1301580036 1301850553 1301860939 1302000074 1302261315 1302264431

1337706-2 APA18-AK 1724 1-787307-1 185491N001 1868 HP-6N C-202-C 202C221-13-0 CA7308-000 8S23-75FR-CS8184 2684 9648

3089 988382-000 A72821-000 AA401 173506-000 1823 202C292-13-0 202C302-13-0 2109 300625 3330 3412 356247-1 M9142

M9143