

## Printed-circuit board connector - MC 0,5/ 8-G-2,5 BK - 1908088

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB headers, nominal current: 4 A, number of positions: 8, pitch: 2.5 mm, color: black, contact surface: Tin, mounting: Wave soldering




The figure shows a 10-position version of the product

### Your advantages

- Well-known mounting principle allows worldwide use

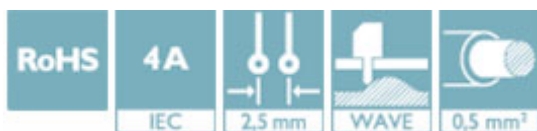

### Key Commercial Data

Packing unit	50 pc
GTIN	 4 017918 446079
GTIN	4017918446079

### Technical data

#### Dimensions

Length [ l ]	10.1 mm
Width	21.9 mm
Pitch	2.5 mm
Dimension a	17.5 mm
Width [ w ]	21.9 mm
Height [ h ]	11.9 mm
Height	8.1 mm
Length of the solder pin	3.8 mm
Pin dimensions	0.8 x 0.8 mm
Length	10.1 mm

#### General

Range of articles	MC 0,5/...-G
Rated voltage (III/3)	80 V

# Printed-circuit board connector - MC 0,5/ 8-G-2,5 BK - 1908088

## Technical data

### General

Connection in acc. with standard	EN-VDE
Nominal current $I_N$	4 A
Color	black
Number of positions	8



### Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

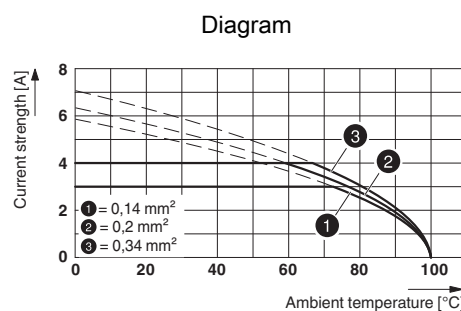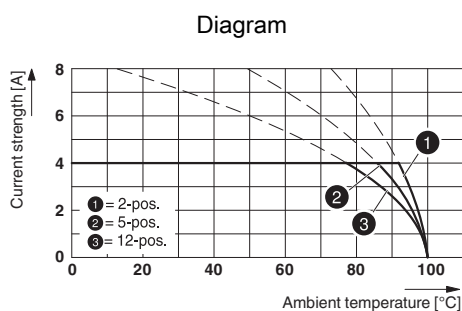

Type: FK-MC 0,5/...-ST-2,5 with MC 0,5/...-G-2,5

Type: FK-MC 0,5/...-ST-2,5 with MC 0,5/...-G-2,5

## Approvals

### Approvals

#### Approvals

CCA / IECB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized


#### Ex Approvals


### Approval details

CCA	CCA/ DE1 34250
Nominal voltage $U_N$	80 V
Nominal current $I_N$	4 A


# Printed-circuit board connector - MC 0,5/ 8-G-2,5 BK - 1908088

## Approvals

IECEE CB Scheme		<a href="http://www.iecee.org/">http://www.iecee.org/</a>	DE1-56068-B1B2
Nominal voltage UN		80 V	
Nominal current IN		4 A	

VDE Gutachten mit Fertigungsüberwachung		<a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a>	40013394
Nominal voltage UN		80 V	
Nominal current IN		4 A	

EAC			B.01742
-----	--	--	---------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E60425-19930913
		B	
Nominal voltage UN		125 V	
Nominal current IN		4 A	

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
 Flachsmarktstr. 8  
 32825 Blomberg  
 Germany  
 Tel. +49 5235 300  
 Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [734-104](#) [734-302](#) [8-141-P](#) [8426620000](#) [860505](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#)  
[PVP02-5,00](#) [PVP03-3,50](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFH16150](#) [ELFP03110](#)  
[ELFP10210](#) [ELFT06250](#) [ELVP03100](#) [1700101](#) [1700410](#) [1700425](#) [1702246](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#)  
[1734692](#) [1734795](#) [1736036](#) [1740194](#) [1740291](#) [1740628](#) [1740990](#) [1746952](#) [1750207](#) [1752441](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#)  
[1760051](#) [1760336](#)