

## Feed-through header - PC 6-16/ 2-G1F-10,16 - 1999000

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB headers, nominal current: 76 A, rated voltage (III/2): 1000 V, nominal cross section: 16 mm<sup>2</sup>, number of positions: 2, pitch: 10.16 mm, color: green, contact surface: Silver, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 4 mm




The figure shows a 5-pos. version of the product

### Your advantages

- Well-known mounting principle allows worldwide use
- Screwable flange for superior mechanical stability
- Maximum flexibility when it comes to device design – one header for connectors with different connection technologies



### Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 50 pc   |
| GTIN         | <br>4 046356 038508 |
| GTIN         | 4046356038508   |

### Technical data

#### Item properties

|                           |                     |
|---------------------------|---------------------|
| Brief article description | Feed-through header |
| Plug-in system            | POWER COMBICON 16   |
| Type of contact           | Male connector      |
| Range of articles         | PC 6-16/..-G1F      |
| Pitch                     | 10.16 mm            |
| Number of positions       | 2                   |
| Mounting type             | Wave soldering      |
| Pin layout                | Linear pinning      |
| Locking                   | Threaded flange     |
| Number of levels          | 1                   |
| Number of connections     | 2                   |
| Number of potentials      | 2                   |

# Feed-through header - PC 6-16/ 2-G1F-10,16 - 1999000

## Technical data

### Electrical parameters

|                             |        |
|-----------------------------|--------|
| Nominal current             | 76 A   |
| Nom. voltage                | 1000 V |
| Rated voltage               | 1000 V |
| Rated voltage (III/2)       | 1000 V |
| Rated voltage (II/2)        | 1000 V |
| Rated surge voltage (III/3) | 8 kV   |
| Rated surge voltage (III/2) | 8 kV   |
| Rated surge voltage (II/2)  | 6 kV   |

### Material data - contact

|   |   |
|---|---|
| Note  | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/ JEDEC JESD 201 |
| Contact material                            | Cu alloy  |
| Surface characteristics                     | Electroplated silver  |
| Metal surface contact area (top layer)      | Silver (4 - 8 µm Ag)  |
| Metal surface contact area (middle layer)   | Nickel (2 - 4 µm Ni),   |
| Metal surface soldering area (top layer)    | Silver (4 - 8 µm Ag)  |
| Metal surface soldering area (middle layer) | Nickel (2 - 4 µm Ni)  |

### Material data - housing

|   |              |
|---|--------------|
| Housing color   | green (6021) |
| Insulating material   | PA           |
| Insulating material group   | I            |
| CTI according to IEC 60112  | 600          |
| Flammability rating according to UL 94                            | V0           |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850          |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775          |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C       |

### Dimensions for the product

|                             |            |
|-----------------------------|------------|
| Length [ l ]                | 34 mm      |
| Width [ w ]                 | 38.08 mm   |
| Height [ h ]                | 17.4 mm    |
| Pitch                       | 10.16 mm   |
| Height (without solder pin) | 13.4 mm    |
| Solder pin [P]              | 4 mm       |
| Pin spacing                 | 10.16 mm   |
| Pin dimensions              | 1 x 1.2 mm |

### Dimensions for PCB design

|               |          |
|---------------|----------|
| Hole diameter | 1.7 mm   |
| Pin spacing   | 10.16 mm |

### Packaging information

# Feed-through header - PC 6-16/ 2-G1F-10,16 - 1999000

## Technical data

### Packaging information

|                            |                     |
|----------------------------|---------------------|
| Type of packaging          | packed in cardboard |
| Pieces per package         | 50                  |
| Denomination packing units | Pcs.                |
| Outer packaging type       | Carton              |

### General product information

|      |  |
|------|--|
| Note | In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load. |
|      | In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load. |

### Ambient conditions

|   |   |
|---|---|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |
| Ambient temperature (operation)         | -40 °C ... 100 °C (dependent on the derating curve) |

### Air clearances and creepage distances

|   |                     |
|---|---------------------|
| Clearances and creepage distances               | IEC 60664-1:2007-04 |
| Specification                                   | IEC 60664-1:2007-04 |
| Minimum clearance - inhomogeneous field (III/3) | 8 mm                |
| Minimum clearance - inhomogeneous field (III/2) | 8 mm                |
| Minimum clearance - inhomogeneous field (II/2)  | 5.5 mm              |
| Minimum creepage distance value (III/3)         | 12.5 mm             |
| Minimum creepage distance value (III/2)         | 5 mm                |
| Minimum creepage distance value (II/2)          | 5 mm                |

### Current carrying capacity / derating curves

|                  |  |
|------------------|--|
| Caption          | Type: PC 16/...-STF-10,16 with PC 6-16/...-G1F-10,16 |
| Specification    | IEC 61984:2008-10                                    |
| Reduction factor | 0.8  |
| Note             | Representation based on IEC 60512-5-2:2002-02        |
|                  | For number of positions, see diagram                 |

### Mechanical tests (A)

|  |             |
|--|-------------|
| Test specification                           | IEC 61984   |
| Insertion strength per pos. approx.          | 14 N        |
| Withdraw strength per pos. approx.           | 12 N        |
| Polarization when inserted requirement >20 N | Test passed |
| Contact holder in insert requirements >20 N  | Test passed |

### Durability tests (B)

|                                   |                       |
|-----------------------------------|-----------------------|
| Specification                     | IEC 60512-9-1:2010-03 |
| Contact resistance R <sub>1</sub> | 0.3 mΩ                |

## Feed-through header - PC 6-16/ 2-G1F-10,16 - 1999000

### Technical data

#### Durability tests (B)

|  |                |
|--|----------------|
| Insertion/withdrawal cycles                  | 50             |
| Contact resistance $R_2$                     | 0.3 m $\Omega$ |
| Impulse withstand voltage at sea level       | 9.8 kV         |
| Power-frequency withstand voltage            | 4.26 kV        |
| Insulation resistance, neighboring positions | > 4 G $\Omega$ |

#### Thermal tests (C)

|   |                       |
|---|-----------------------|
| Specification                                   | IEC 60512-5-1:2002-02 |
| Number of positions                             | 8                     |
| Conductor cross section                         | 16 mm <sup>2</sup>    |
| Test current                                    | 76 A                  |
| Upper limiting temperature requirements <100 °C | Test passed           |

#### Climatic tests (D)

|  |   |
|--|---|
| Specification                          | ISO 6988:1985-02  |
| Cold stress                            | -40 °C/2 h  |
| Thermal stress                         | 105 °C/168 h  |
| Corrosive stress                       | 0.2 dm <sup>3</sup> SO <sub>2</sub> on 300 dm <sup>3</sup> /40 °C/1 cycle |
| Impulse withstand voltage at sea level | 9.8 kV  |
| Power-frequency withstand voltage      | 4.26 kV   |

#### Environmental and durability tests (E)

|                                       |  |
|---------------------------------------|--|
| Specification                         | IEC 61984:2008-10                          |
| Result, degree of protection, IP code | Back of hand safety with IP10 access probe |

#### Standards and Regulations

|  |        |
|--|--------|
| Connection in acc. with standard       | EN-VDE |
|  | CUL    |
| Flammability rating according to UL 94 | V0     |


#### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |


### Drawings

# Feed-through header - PC 6-16/ 2-G1F-10,16 - 1999000

Drilling diagram

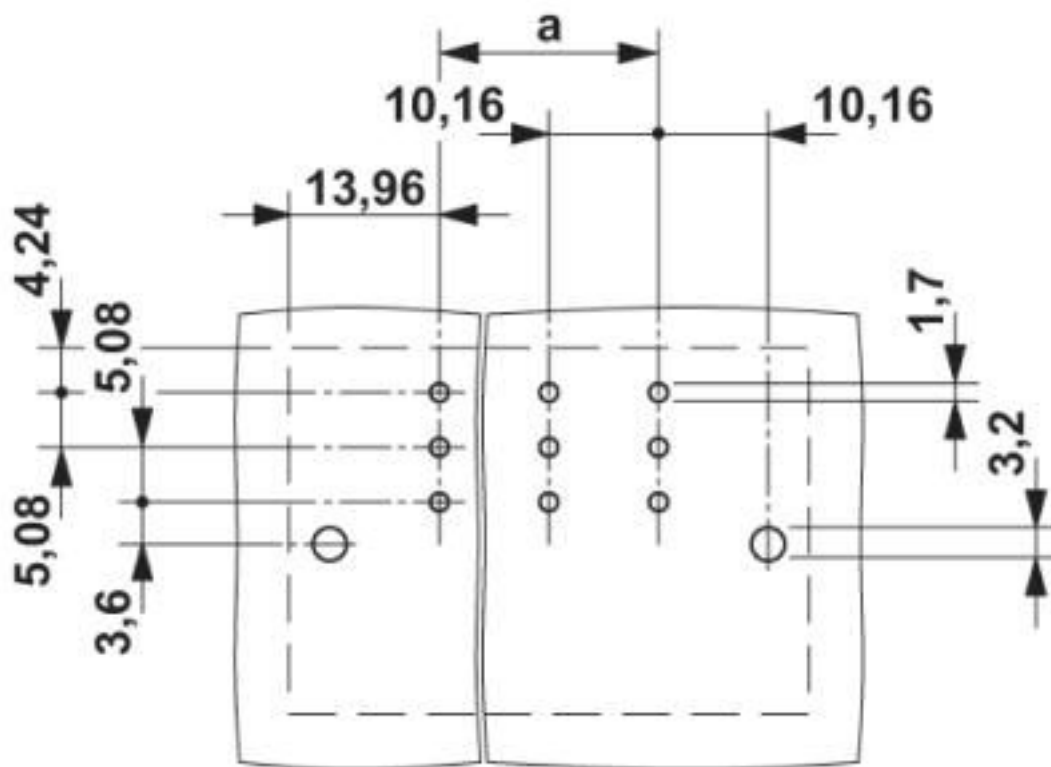


Diagram

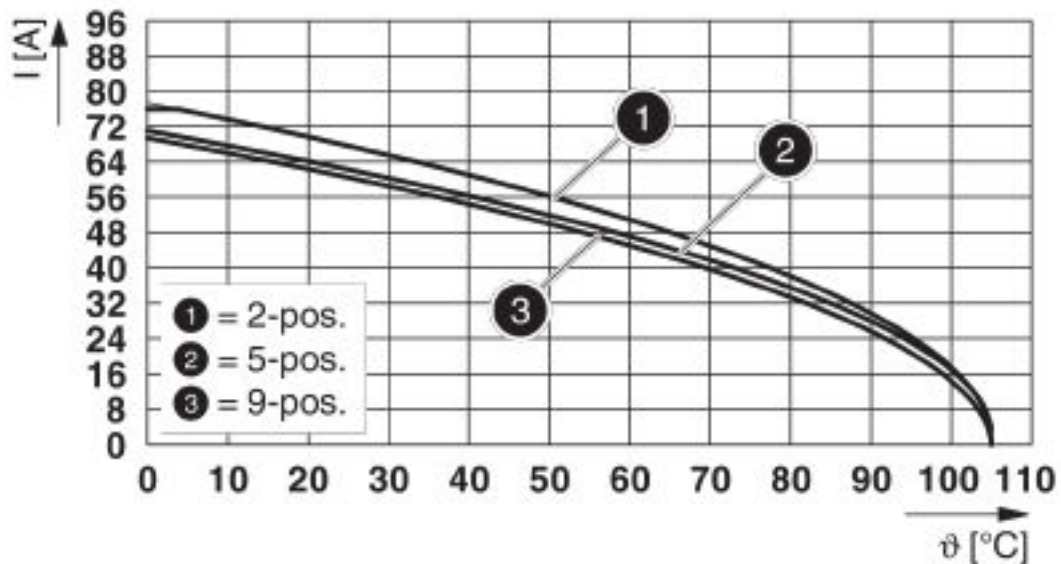

Type: PC 16/...-STF-10,16 with PC 6-16/...-G1F-10,16

## Feed-through header - PC 6-16/ 2-G1F-10,16 - 1999000

Dimensional drawing

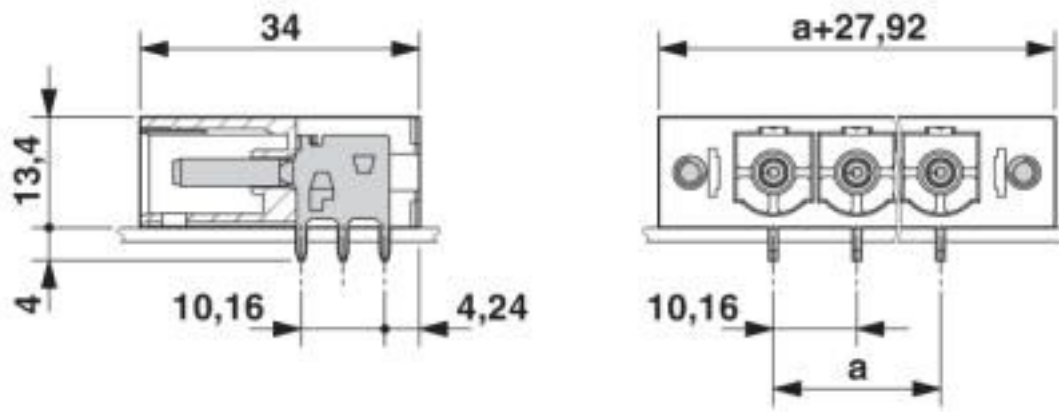

### Classifications

#### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27440402 |
| eCl@ss 4.0    | 27260700 |
| eCl@ss 4.1    | 27260700 |
| eCl@ss 5.0    | 27260700 |
| eCl@ss 5.1    | 27260700 |
| eCl@ss 6.0    | 27260700 |
| eCl@ss 7.0    | 27440402 |
| eCl@ss 8.0    | 27440402 |
| eCl@ss 9.0    | 27440402 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |
| ETIM 6.0 | EC002637 |
| ETIM 7.0 | EC002637 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |
| UNSPSC 18.0   | 39121409 |
| UNSPSC 19.0   | 39121409 |
| UNSPSC 20.0   | 39121409 |
| UNSPSC 21.0   | 39121409 |

# Feed-through header - PC 6-16/ 2-G1F-10,16 - 1999000

## Approvals

### Approvals

#### Approvals

IECEE CB Scheme / SEV / EAC / cULus Recognized

#### Ex Approvals

### Approval details

|                    |  |   |             |
|--------------------|--|---|-------------|
| IECEE CB Scheme    |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | CH-10653-M1 |
| Nominal voltage UN |  | 1000 V  |             |
| Nominal current IN |  | 76 A  |             |

|                    |  |   |            |
|--------------------|--|---|------------|
| SEV                |  | <a href="https://www.eurofins.ch/de/">https://www.eurofins.ch/de/</a> | IK-4468-M1 |
| Nominal voltage UN |  | 1000 V  |            |
| Nominal current IN |  | 76 A  |            |

|     |  |         |  |
|-----|--|---------|--|
| EAC |  | B.01687 |  |
|-----|--|---------|--|

|                    |       |   |                 |
|--------------------|-------|---|-----------------|
| cULus Recognized   |       | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-20040202 |
|                    | B     | C   | D               |
| Nominal voltage UN | 300 V | 300 V   | 600 V           |
| Nominal current IN | 66 A  | 66 A  | 5 A             |

## Accessories

### Accessories

### Coding element

## Feed-through header - PC 6-16/ 2-G1F-10,16 - 1999000

### Accessories

Coding profile - CP-PC RD - 1701967



Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red

---

### Mounting material

Accessories - DFK-PC 16-SS - 1705449



Screw set for DFK-PC 16... connectors

---

### Additional products

Printed-circuit board connector - SPC 16/ 2-STF-10,16 - 1711378



PCB connector, nominal current: 76 A, rated voltage (III/2): 1000 V, nominal cross section: 16 mm<sup>2</sup>, number of positions: 2, pitch: 10.16 mm, connection method: Push-in spring connection, color: green, contact surface: Silver

---

Printed-circuit board connector - TPC 16/ 2-STF-10,16 - 1715251



PCB connector, nominal current: 76 A, rated voltage (III/2): 1000 V, nominal cross section: 16 mm<sup>2</sup>, number of positions: 2, pitch: 10.16 mm, connection method: Screw connection with tension sleeve, color: green, contact surface: Silver

---

Printed-circuit board connector - PC 6/ 2-STF-10,16 - 1913578



PCB connector, nominal current: 41 A, rated voltage (III/2): 1000 V, nominal cross section: 6 mm<sup>2</sup>, number of positions: 2, pitch: 10.16 mm, connection method: Screw connection with tension sleeve, color: green, contact surface: Silver



## Feed-through header - PC 6-16/ 2-G1F-10,16 - 1999000

### Accessories

Printed-circuit board connector - PC 16/ 2-STF-10,16 - 1967456



PCB connector, nominal current: 76 A, rated voltage (III/2): 1000 V, nominal cross section: 16 mm<sup>2</sup>, number of positions: 2, pitch: 10.16 mm, connection method: Screw connection with tension sleeve, color: green, contact surface: Silver

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [734-104](#) [734-302](#) [8-141-P](#) [8426620000](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP03-3,50](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFH16150](#) [ELFP03110](#) [ELFP10210](#) [ELFT06250](#) [ELVP03100](#) [1700101](#) [1700410](#) [1700425](#) [1702246](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1734692](#) [1734795](#) [1736036](#) [1740194](#) [1740291](#) [1740628](#) [1740990](#) [1746952](#) [1750207](#) [1752441](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#) [1760051](#)