

## Upper part of housing - EH 67,5 F-C SS/ABS GY7035 - 2201097

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail housing, Upper part, flat design, One-way connection opening, with vents, width: 67.6 mm, height: 74.65 mm, depth: 36.95 mm, color: light gray (7035)

### Your advantages

- ✓ DIN rail or wall mounting for application-specific device attachment
- ✓ Easy design-in, thanks to variable housing form factor
- ✓ Complete flexibility, thanks to PCBs with horizontal, frontal, and orthogonal orientation to the front of the device
- ✓ Three cover versions for individual PCB connections
- ✓ Integration of a wide variety of PCB connection technologies for a functional device design



### Key Commercial Data

|              |               |
|--------------|---------------|
| Packing unit | 10 pc         |
| GTIN         |               |
| GTIN         | 4046356911184 |

### Technical data

#### Item properties

|                              |                           |
|------------------------------|---------------------------|
| Brief article description    | Upper part of housing     |
| Type                         | EH 67,5 F-C SS/ABS GY7035 |
| Order No.                    | 2201097                   |
| Housing type                 | DIN rail housing          |
| Housing series               | EH                        |
| Type                         | Upper part, flat design   |
| Max. IP code to attain       | IP20                      |
| Mounting type                | Snap in                   |
| Ventilation openings present | yes                       |

#### Dimensions

|             |         |
|-------------|---------|
| Width [ w ] | 67.6 mm |
|-------------|---------|

## Upper part of housing - EH 67,5 F-C SS/ABS GY7035 - 2201097

### Technical data

#### Dimensions

|                                     |          |
|-------------------------------------|----------|
| Height [ h ]                        | 74.65 mm |
| Depth [ d ]                         | 36.95 mm |
| Depth from base support surface [d] | 19.95 mm |

#### Material data

|  |                   |
|--|-------------------|
| Housing material                       | ABS               |
| Color (RAL)                            | light gray (7035) |
| Flammability rating according to UL 94 | HB                |

#### Ambient conditions

|   |   |
|---|---|
| Ambient temperature (storage/transport) | -40 °C ... 55 °C                                  |
| Ambient temperature (assembly)          | -5 °C ... 80 °C                                   |
| Ambient temperature (operation)         | -40 °C ... 80 °C (depending on power dissipation) |

#### PCB data

|                   |                                |
|-------------------|--------------------------------|
| Mounting position | Vertical (horizontal DIN rail) |
| Type of PCB mount | Latching                       |

#### General information

|              |   |
|--------------|---|
| Type of note | Assembly instruction:                                       |
| Note         | Refer to the data sheet for the range in the download area. |

#### Packaging information

|                            |      |
|----------------------------|------|
| Pieces per package         | 10   |
| Denomination packing units | Pcs. |

#### Standards and regulations

|  |    |
|--|----|
| Flammability rating according to UL 94 | HB |
|--|----|


#### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

### Drawings

## Upper part of housing - EH 67,5 F-C SS/ABS GY7035 - 2201097

Dimensional drawing

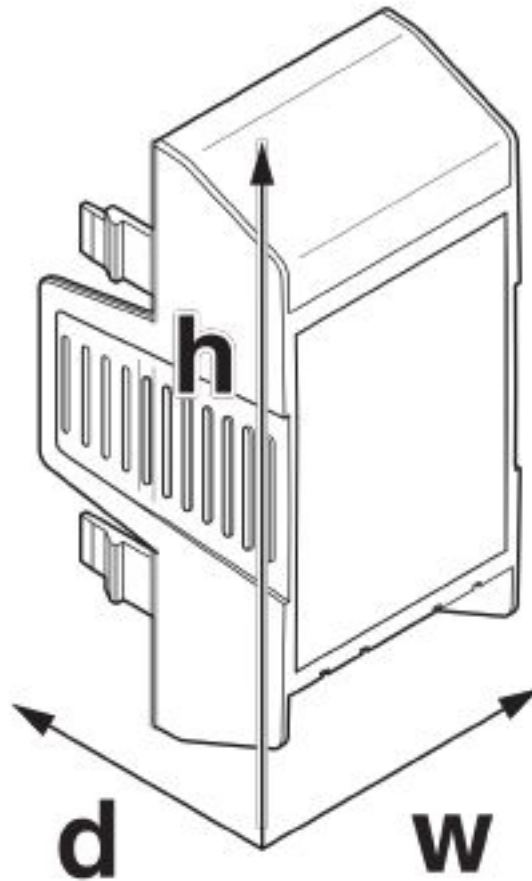

### Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27182702 |
| eCl@ss 5.0    | 27180500 |
| eCl@ss 5.1    | 27180500 |
| eCl@ss 6.0    | 27180800 |
| eCl@ss 7.0    | 27182702 |
| eCl@ss 8.0    | 27182702 |
| eCl@ss 9.0    | 27182702 |

ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC001031 |
| ETIM 5.0 | EC001031 |
| ETIM 6.0 | EC001031 |
| ETIM 7.0 | EC001031 |

# Upper part of housing - EH 67,5 F-C SS/ABS GY7035 - 2201097

## Classifications

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 31261501 |
| UNSPSC 18.0 | 31261501 |
| UNSPSC 19.0 | 31261501 |
| UNSPSC 20.0 | 31261501 |
| UNSPSC 21.0 | 31261501 |

## Accessories

### Accessories

#### Filler plug

Filler plugs - EH 22,5 F-FP/ABS BK9005 - 2201845



DIN rail housing, Filler plug for unoccupied terminal points, with vents, width: 21.35 mm, height: 13.67 mm, depth: 33.39 mm, color: black (9005)

Filler plugs - EH 22,5 F-FP/ABS GY7035 - 2201844



DIN rail housing, Filler plug for unoccupied terminal points, with vents, width: 21.35 mm, height: 13.67 mm, depth: 33.39 mm, color: light gray (7035)

## Necessary add-on products

PCB terminal block - MKDS 3/12-5,08 - 1714308



PCB terminal block, nominal current: 24 A, rated voltage (III/2): 400 V, nominal cross section: 2.5 mm<sup>2</sup>, pitch: 5.08 mm, number of positions: 12, connection method: Screw connection with tension sleeve, mounting: Wave soldering, conductor/PCB connection direction: 0 °, color: green, Pin layout: Linear pinning, Solder pin [P]: 5 mm. The article can be aligned to create different nos. of positions!

Feed-through header - MSTBV 2,5/12-G - 1753631



PCB headers, nominal current: 12 A, rated voltage (III/2): 320 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 12, pitch: 5 mm, color: green, contact surface: Tin, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.9 mm

## Upper part of housing - EH 67,5 F-C SS/ABS GY7035 - 2201097

### Accessories

#### Feed-through header - MSTBV 2,5/12-G-5,08 - 1758115



PCB headers, nominal current: 12 A, rated voltage (III/2): 320 V, nominal cross section: 2.5 mm<sup>2</sup>, number of positions: 12, pitch: 5.08 mm, color: green, contact surface: Tin, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.9 mm

#### Pin strip - PST 1,3/12-5,0 - 1933286



Pin strip, nominal current: 12 A, rated voltage (III/2): 320 V, nominal cross section: 1.5 mm<sup>2</sup>, number of positions: 12, pitch: 5 mm, color: black, contact surface: Tin, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 3.5 mm, The maximum current depends on the plug used. The lower of the two current values apply for plug and pin strip. The pin strip is made of highly temperature resistant plastic and is thus suitable for the reflow process.

#### Printed-circuit board connector - MCV 1,5/16-G-3,81 - 1803565



PCB headers, nominal current: 8 A, rated voltage (III/2): 160 V, nominal cross section: 1.5 mm<sup>2</sup>, number of positions: 16, pitch: 3.81 mm, color: green, contact surface: Tin, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 3.4 mm

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Enclosures, Boxes & Cases](#) *category:*

*Click to view products by* [Phoenix Contact](#) *manufacturer:*

Other Similar products are found below :

[585-R-WH-PK](#) [M-10-PLATED](#) [60221-01](#) [60566-01-000](#) [HPL-9VB BATT DOOR](#) [M18-PLTD](#) [M-21-PLATED](#) [63310-01-000](#) [6711GSKT](#)  
[71884-29-028](#) [LH45-100 Black](#) [72868-510-000](#) [CNS-0000 Black](#) [72883-510-000](#) [CNS-0101 Black](#) [72906-510-000](#) [CNS-0407 Black](#) [73092-](#)  
[510-000](#) [CNM-0101 Black](#) [73105-510-000](#) [CNL-0101 Black](#) [73108-510-000](#) [CNL-0303 Black](#) [73395-510-039](#) [CNS-0006 Bone](#) [74257-510-000](#)  
[CNL-0004](#) [MDC-1183-PLAIN-ALUM](#) [MDC-1183-PTD](#) [MDC-13104-PTD](#) [MDC-321-PTD](#) [MDC-973-PTD](#) [76](#) [77153-01-028](#) [FLX6030](#)  
[83535-01-508](#) [90026-501-000](#) [PS36-200](#) [116-508](#) [120-407](#) [120-910](#) [127-908](#) [130-008](#) [1301170079](#) [1322GSKTEP](#) [1325GSKT3](#) [1434-1210](#)  
[EAS-500 \(BLACK ANO\)](#) [1804RP-RB-PK](#) [190-005](#) [2202307](#) [KAB3321 BLACK](#) [KAB3421](#) [2697466](#) [S52213](#) [2901123](#) [2901699](#) [A0645271](#)  
[A20P20](#) [2106-IR](#) [PERF-850-PLN](#)