

## Device terminal block - G 10/ 2 - 2716703

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Device terminal block, for direct mounting, 2-pos.


The figure shows a combination of versions G 10/2, G 10/4 and G 10/5

### Your advantages

- Touch-proof shock protection



### Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 10 pc   |
| GTIN         | <br>4 017918 061975 |
| GTIN         | 4017918061975   |

### Technical data

#### General

|   |  |
|---|--|
| Number of positions                             | 2  |
| Number of levels                                | 1  |
| Number of connections                           | 4  |
| Potentials                                      | 2  |
| Nominal cross section                           | 10 mm <sup>2</sup>                                     |
| Color   | gray   |
| Insulating material                             | PA   |
| Flammability rating according to UL 94          | V2   |
| Rated surge voltage                             | 8 kV   |
| Degree of pollution                             | 3  |
| Overvoltage category                            | III  |
| Insulating material group                       | I  |
| Maximum power dissipation for nominal condition | 1.82 W   |
| Maximum load current                            | 76 A (with 16 mm <sup>2</sup> conductor cross section) |

# Device terminal block - G 10/ 2 - 2716703

## Technical data

### General

|   |  |
|---|--|
| Nominal current I <sub>N</sub>  | 57 A   |
| Nominal voltage U <sub>N</sub>  | 800 V  |
| Open side panel   | No   |
| Ambient temperature (operation)   | -60 °C ... 85 °C   |
| Ambient temperature (storage/transport)   | -25 °C ... 55 °C (For a short time, not exceeding 24 h, -60 to +70 °C) |
| Permissible humidity (storage/transport)  | 30 % ... 70 %  |
| Ambient temperature (assembly)  | -5 °C ... 70 °C  |
| Ambient temperature (actuation)   | -5 °C ... 70 °C  |
| Shock protection test specification   | IEC 60529:2001-02  |
| Back of the hand protection   | guaranteed   |
| Finger protection   | guaranteed   |
| Result of surge voltage test  | Test passed  |
| Result of power-frequency withstand voltage test  | Test passed  |
| Power frequency withstand voltage setpoint  | 2 kV   |
| Result of the test for mechanical stability of terminal points (5 x conductor connection) | Test passed  |
| Result of bending test  | Test passed  |
| Bending test rotation speed   | 10 rpm   |
| Bending test turns  | 135  |
| Bending test conductor cross section/weight   | 0.5 mm <sup>2</sup> / 0.3 kg   |
|   | 10 mm <sup>2</sup> / 2 kg  |
|   | 16 mm <sup>2</sup> / 2.9 kg  |
| Tensile test result   | Test passed  |
| Result of voltage-drop test   | Test passed  |
| Result of temperature-rise test   | Test passed  |
| Requirement temperature-rise test   | Increase in temperature ≤ 45 K   |
| Short circuit stability result  | Test passed  |
| Conductor cross section short circuit testing   | 10 mm <sup>2</sup>   |
| Short-time current  | 1.2 kA   |
| Conductor cross section short circuit testing   | 16 mm <sup>2</sup>   |
| Short-time current  | 1.92 kA  |
| Result of thermal test  | Test passed  |
| Proof of thermal characteristics (needle flame) effective duration                        | 30 s   |
| Relative insulation material temperature index (Elec., UL 746 B)                          | 125 °C   |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))                   | 125 °C   |
| Static insulating material application in cold  | -40 °C   |

### Dimensions

|        |       |
|--------|-------|
| Width  | 29 mm |
| Length | 33 mm |
| Height | 31 mm |

# Device terminal block - G 10/ 2 - 2716703

## Technical data

### Connection data

|  |                         |
|--|-------------------------|
| Connection method  | Screw connection        |
| Screw thread   | M4                      |
| Stripping length   | 12 mm                   |
| Tightening torque, min   | 1.5 Nm                  |
| Tightening torque max  | 1.8 Nm                  |
| Connection in acc. with standard   | IEC 60947-7-1/IEC 60998 |
| Conductor cross section solid min.   | 0.5 mm <sup>2</sup>     |
| Conductor cross section solid max.   | 16 mm <sup>2</sup>      |
| Conductor cross section AWG min.   | 20                      |
| Conductor cross section AWG max.   | 6                       |
| Conductor cross section flexible min.  | 0.5 mm <sup>2</sup>     |
| Conductor cross section flexible max.  | 10 mm <sup>2</sup>      |
| Min. AWG conductor cross section, flexible   | 20                      |
| Max. AWG conductor cross section, flexible   | 8                       |
| Conductor cross section flexible, with ferrule without plastic sleeve min.                             | 0.5 mm <sup>2</sup>     |
| Conductor cross section flexible, with ferrule without plastic sleeve max.                             | 16 mm <sup>2</sup>      |
| Conductor cross section flexible, with ferrule with plastic sleeve min.                                | 0.5 mm <sup>2</sup>     |
| Conductor cross section flexible, with ferrule with plastic sleeve max.                                | 16 mm <sup>2</sup>      |
| 2 conductors with same cross section, solid min.   | 0.5 mm <sup>2</sup>     |
| 2 conductors with same cross section, solid max.   | 6 mm <sup>2</sup>       |
| 2 conductors with same cross section, stranded min.  | 0.5 mm <sup>2</sup>     |
| 2 conductors with same cross section, stranded max.  | 6 mm <sup>2</sup>       |
| Two conductors with the same cross section, flexible, with TWIN ferrules, with plastic sleeve, minimum | 0.5 mm <sup>2</sup>     |
| Two conductors with the same cross section, flexible, with TWIN ferrules, with plastic sleeve, maximum | 6 mm <sup>2</sup>       |
| Two conductors with the same cross section stranded, with ferrule and without plastic sleeve, minimum  | 0.5 mm <sup>2</sup>     |
| Two conductors with the same cross section stranded, with ferrule and without plastic sleeve, maximum  | 6 mm <sup>2</sup>       |
| Internal cylindrical gage  | A3                      |

### Standards and Regulations

|  |                         |
|--|-------------------------|
| Connection in acc. with standard       | CSA                     |
|  | IEC 60947-7-1/IEC 60998 |
| Flammability rating according to UL 94 | V2                      |


### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 50 years  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


# Device terminal block - G 10/ 2 - 2716703

## Drawings

Dimensional drawing

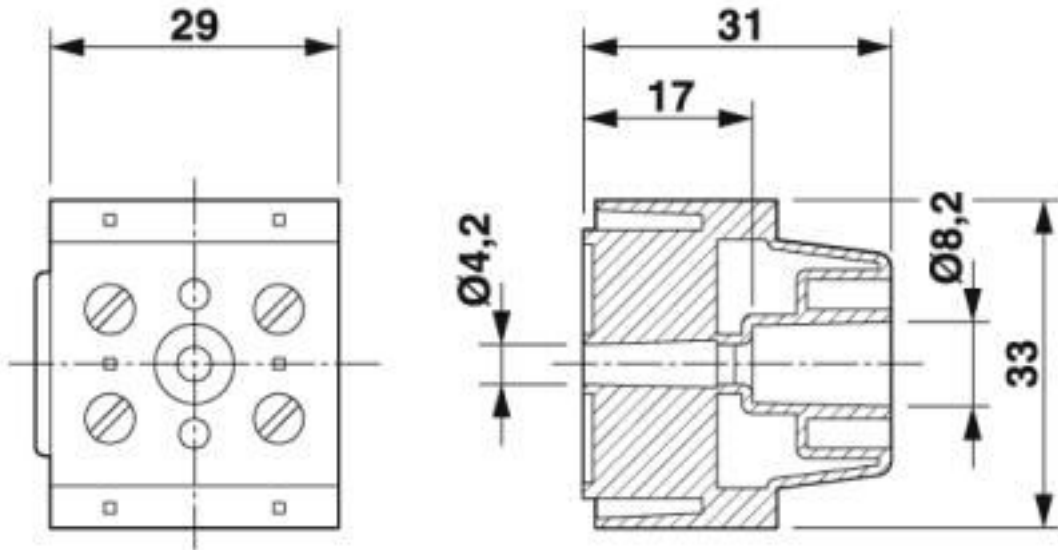

Circuit diagram

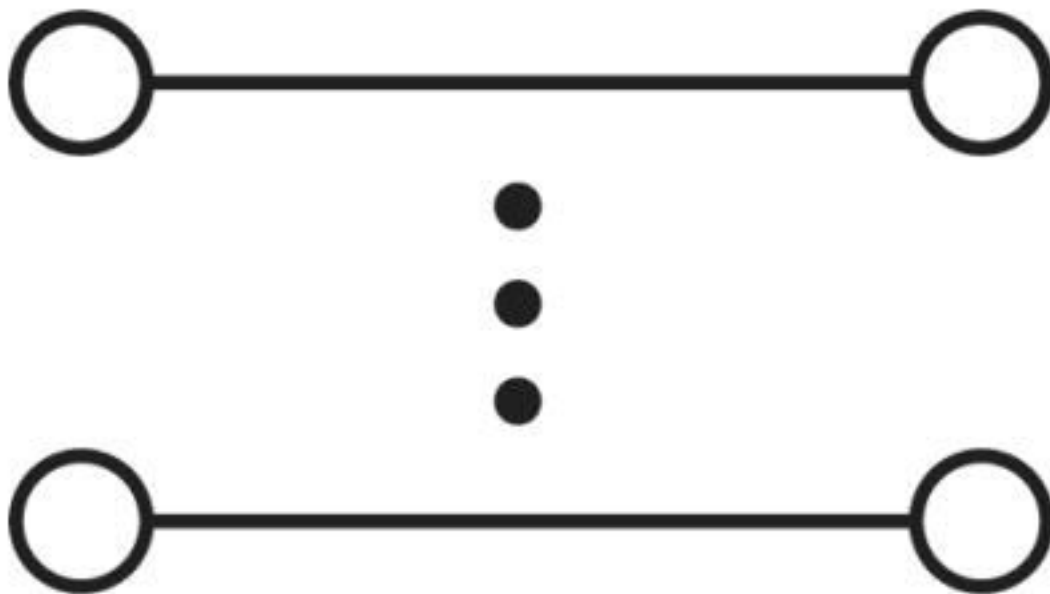

## Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27141120 |
| eCl@ss 4.0    | 27141100 |
| eCl@ss 4.1    | 27141100 |

# Device terminal block - G 10/ 2 - 2716703

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 5.0 | 27141100 |
| eCl@ss 5.1 | 27141100 |
| eCl@ss 6.0 | 27141100 |
| eCl@ss 7.0 | 27141106 |
| eCl@ss 8.0 | 27141106 |
| eCl@ss 9.0 | 27141120 |

### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC001284 |
| ETIM 3.0 | EC001284 |
| ETIM 4.0 | EC001284 |
| ETIM 5.0 | EC001284 |
| ETIM 6.0 | EC001284 |
| ETIM 7.0 | EC001284 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11     | 39121410 |
| UNSPSC 12.01  | 39121410 |
| UNSPSC 13.2   | 39121409 |
| UNSPSC 18.0   | 39121410 |
| UNSPSC 19.0   | 39121410 |
| UNSPSC 20.0   | 39121410 |
| UNSPSC 21.0   | 39121410 |

## Approvals

### Approvals

---

Approvals

CSA / UL Recognized / EAC

---

Ex Approvals

---

### Approval details

# Device terminal block - G 10/ 2 - 2716703

## Approvals

|                            |  |   |       |
|----------------------------|--|---|-------|
| CSA                        |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 13631 |
| Nominal voltage UN         |  | 600 V   |       |
| Nominal current IN         |  | 65 A  |       |
| mm <sup>2</sup> /AWG/kcmil |  | 24-6  |       |

|                            |  |   |              |
|----------------------------|--|---|--------------|
| UL Recognized              |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 60425 |
| Nominal voltage UN         |  | 600 V   |              |
| Nominal current IN         |  | 65 A  |              |
| mm <sup>2</sup> /AWG/kcmil |  | 24-6  |              |

|     |  |                          |
|-----|--|--------------------------|
| EAC |  | RU C-<br>DE.BL08.B.00534 |
|-----|--|--------------------------|

## Accessories

### Accessories

#### Screwdriver tools

Screwdriver - SZS 1,0X4,0 VDE - 1205066



Screwdriver, slot-headed, VDE insulated, size: 1.0 x 4.0 x 100 mm, 2-component grip, with non-slip grip

#### Terminal marking

Marker for terminal blocks - BN WH - 1401404



Marker for terminal blocks, Stud, white, unlabeled, can be labeled with: Marker pen, mounting type: plug in, for terminal block width: 4.2 mm, lettering field size: 4 x 4 mm

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Terminal Blocks](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[MBE-1512](#) [MBE-154](#) [MBE-156](#) [MBES-153](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MI-272](#) [880507](#) [MPT-275](#)  
[15602-04-08-21](#) [BA311TU](#) [BA411SU](#) [MV-152](#) [MV-252-D](#) [MV-253/NCNOC](#) [MV-254-D](#) [MV-255](#) [MV-462](#) [MV-493](#) [MVE-252](#) [MVE-253](#)  
[MVE-273](#) [MVEB-153](#) [1700096](#) [1705142](#) [1712417](#) [1713020](#) [1713088](#) [1745195](#) [1760594](#) [1776118-2](#) [1790852](#) [1-796689-8](#) [1-796692-6](#)  
[1800001](#) [1800114](#) [1995279](#) [20020314-C121B01LF](#) [20020316-G041B01LF](#) [CB2-12](#) [KP03215000J0G](#) [KP04215000J0G](#) [S451](#) [282802-2](#)  
[29.007](#) [29.116](#) [30.103](#)