

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



INTERBUS-ST digital input/output module, eight inputs, 24 V DC, eight outputs, 24 V DC, 2 A, IP20 degree of protection, consisting of: Terminal part with screw connection and module electronics

Product Description

INTERBUS ST digital input and output modules

The digital INTERBUS input/output modules provide the option of connecting 8 sensors and 8 actuators with two or three-wire connections. The electronics module is a plug-in type. In the event of a malfunction, the passive basic termination block remains on the DIN rail and the active electronics module can be replaced within a few seconds.

The modules are protected against polarity reversal and the outputs are additionally protected against short-circuiting with fuses. The status of the fuses is monitored and any errors which occur are passed on to the control system.

The contact with the protective earth ground is made directly when the module is snapped onto the DIN rail.

Input/output status LEDs and bus diagnostic displays on the top side of the module electronics give information on the condition of the module at any time.

All the modules can be labeled individually on the large, pull-out labeling field. The insert cards can be labeled by hand, plotter, or printer. The terminal points can also be labeled individually with Zack strip.

Your advantages

- 8 digital outputs
- 8 digital inputs
- Connection of actuators in 3-wire technology
- Connection of sensors in 3-wire technology
- Electrical isolation
- Diagnostic and status indicators
- DIN rail mounting

Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4017918062880

Technical data

Note

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	118 mm
Height	117 mm
Depth	116 mm

Ambient conditions

Ambient temperature (operation)	0 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	30 % ... 75 % (non-condensing)
Permissible humidity (storage/transport)	30 % ... 95 % (non-condensing)
Air pressure (operation)	86 kPa ... 108 kPa (1500 m above sea level)
Air pressure (storage/transport)	66 kPa ... 108 kPa (3500 m above sea level)
Degree of protection	IP20

Interfaces

Designation	ST local bus
Connection method	ST local bus connector
Transmission speed	500 kbps

Digital inputs

Input name	Digital inputs
Connection method	Screw connection
Connection technology	3-wire
Number of inputs	8
Typical response time	3 ms (typ.)
Protective circuit	Overload protection Fuse in header
Nominal input current at U _{IN}	typ. 5 mA (per channel)
Input voltage	24 V DC
Input voltage range "0" signal	-30 V DC ... 5 V DC
Input voltage range "1" signal	13 V DC ... 30 V DC

Digital outputs

Output name	Digital outputs
Connection method	Screw connection
Connection technology	3-wire
Number of outputs	8
Protective circuit	Short-circuit protection Fuse
	Overload protection Fuse in header
Maximum output current per channel	2 A
Maximum output current per module / terminal block	16 A
Maximum output current per group	8 A

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Technical data

Power supply for module electronics

Supply voltage	24 V DC
Supply voltage range	20 V DC ... 30 V DC (including ripple)
Ripple	3.6 V _{pp} within the allowable voltage range
Current consumption	0.2 A

General

Mounting type	DIN rail
Net weight	710 g
Mounting position	Horizontal DIN rail

Electrical isolation

Test section	Bus logic / I/O 500 V AC 50 Hz 1 min.
	I/O / Ground conductor 500 V AC 50 Hz 1 min.

Standards and Regulations


Connection in acc. with standard	CUL
Protection class	III (IEC 61140, EN 61140, VDE 0140-1)

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Connection diagram

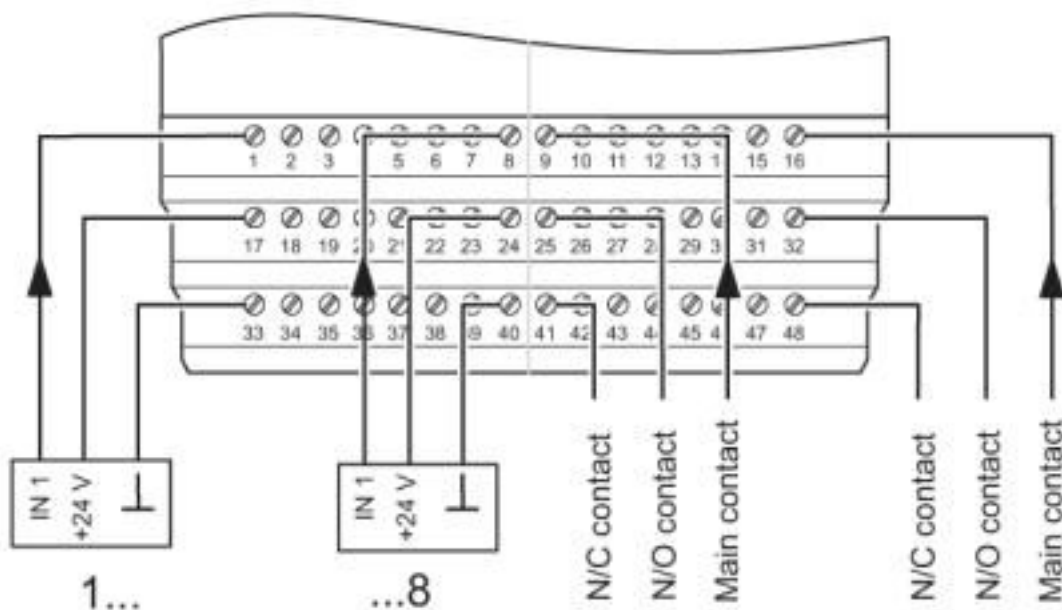

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Classifications

eCl@ss

eCl@ss 10.0.1	27242604
eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27242600
eCl@ss 6.0	27242600
eCl@ss 7.0	27242604
eCl@ss 8.0	27242604
eCl@ss 9.0	27242604

ETIM

ETIM 2.0	EC001430
ETIM 3.0	EC001599
ETIM 4.0	EC001599
ETIM 5.0	EC001599
ETIM 6.0	EC001599
ETIM 7.0	EC001599

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	32151602
UNSPSC 18.0	32151602
UNSPSC 19.0	32151602
UNSPSC 20.0	32151602
UNSPSC 21.0	32151602

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Approvals

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 140324
mm ² /AWG/kcmil		30-12	

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 140324
mm ² /AWG/kcmil		30-12	

EAC		EAC-Zulassung
-----	--	---------------

cULus Recognized	
------------------	--

Accessories

Accessories

Bridge

Jumper - IB ST LBC - 2836492



Spare local bus cable, for INTERBUS-ST modules

Insertion bridge - EB 84 IB ST BU - 2836269



Insertion bridges, divisible, isolated comb spine, color blue, 84-pos.

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Accessories

Insertion bridge - EB 84 IB ST RD - 2836272



Insertion bridges, divisible, isolated comb spine, color red, 84-pos.

Device parameterization

Software - AX+ BASIC - 2985068



Software CD for FDT container for integrating device DTMs (free download)

Fuse

Fuse - IBS TR5 4AF - 2753465



Replacement fuse, for INTERBUS-ST modules

Programming

Software - AX DTM LIB - 2988065



DTM library

Replacement electronics module - IB STME 24 DIO 8/8/3-2A - 2752945



Replacement module electronics for IB ST (ZF) 24 DIO 8/8/3-2A

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[61FGPN8DAC120](#) [CV500SLK21](#) [70177-1011](#) [F03-03 HAS C](#) [F03-31](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [H2CRSAC110B](#)
[R88A-CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DRT2ID08C](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [E53-AZ01](#)
[E53E01](#) [E53E8C](#) [E5C4Q40J999FAC120](#) [E5CWLQ1TCAC100240](#) [E5GNQ03PFLKACDC24](#) [B300LKL21](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV-CN001](#) [OAS-160-N](#) [C40PEDRA](#) [K31S6](#) [K33-L1B](#) [K3MA-F](#) [100-240VAC](#) [K3TX-AD31A](#) [89750101](#) [L595020](#)
[SRM1-C02](#) [SRS2-1](#) [FT1A-C14SA-S](#) [G32X-V2K](#) [26546803](#) [26546805](#) [PWRA440A](#) [CPM1AETL03CH](#) [CV500SLK11](#) [3G2A5BI081](#)
[3G2A5IA122](#) [3G2A5LK010E](#) [3G2A5OA223](#)