

Digital display - MCR-FL-D-U-I-2SP- 24 - 2864215

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




MCR digital display, for measurement and display of standard signals, auxiliary power supply 24 V DC

Your advantages

- ✓ 96 x 48 mm display
- ✓ Electrical isolation
- ✓ 5-digit display
- ✓ Totalizer
- ✓ 2 relay outputs with freely adjustable limit values
- ✓ For standard analog signals
- ✓ Programmable

Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 820688
GTIN	4017918820688

Technical data

Dimensions

Width	96 mm
Height	48 mm
Depth	93.1 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	IP65 from the front

Input data

Voltage input signal	0 V ... 10 V
----------------------	--------------

Digital display - MCR-FL-D-U-I-2SP- 24 - 2864215

Technical data

Input data

	-10 V ... 10 V
Current input signal	0 mA ... 20 mA
	4 mA ... 20 mA
max. input voltage	± 30 V
Max. input current	50 mA
Input resistance of voltage input	> 1 MΩ
Input resistance current input	< 50 Ω

Switching output

Output name	2 x relay output + digital display
Contact type	2 PDT
Contact material	AgCdO
Maximum switching voltage	300 V DC
	250 V AC
Min. switching current	30 mA DC
Interrupting rating (ohmic load) max.	50 W
	2000 VA
Max. switching current	3 A

Power supply

Supply voltage range	10 V DC ... 30 V DC
Power consumption	max. 2 W

General

Test voltage, input/output/supply	500 V _{rms} / 2.3 kV _{rms} , 50/60 Hz, 1 min.
Color	black
Housing material	Macrolon 2405
Conformance	CE-compliant
UL, USA/Canada	UL 508 Recognized

Standards and Regulations

Connection in acc. with standard	CUL
Conformance	CE-compliant
UL, USA/Canada	UL 508 Recognized


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings


Digital display - MCR-FL-D-U-I-2SP- 24 - 2864215

Application drawing

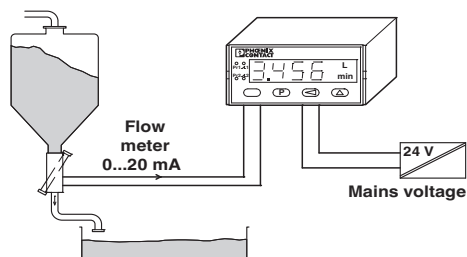


Flow measurement and display

Dimensional drawing

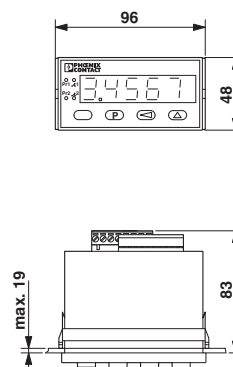

Circuit diagram

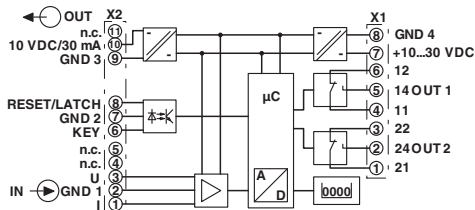

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals


Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 197577
---------------	--	---	---------------

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 197577
----------------	--	---	---------------

Digital display - MCR-FL-D-U-I-2SP- 24 - 2864215

Approvals



Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Panel Meters](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[M00558-00](#) [70.360.4828.0](#) [72331-00](#) [85310-25](#) [86642-00](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [DMS-20ACV-3-R-C](#)
[EM11DINAV81XR1X](#) [25.325.3253.1](#) [25.325.4253.1](#) [25.330.0453.1](#) [20046-20](#) [20182-23](#) [AP1021](#) [25.320.5053.0](#) [25.350.3453.1](#)
[25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [04.630.1080.0](#) [20078-20](#) [EM11DINAV81XO1X](#) [85874-26](#) [87166-00](#) [87895-00](#) [28000-03](#) [K3GN-](#)
[NDT1-FLK 24VDC](#) [82322K-11](#) [86641-00](#) [87004-00](#) [HB8280R2490](#) [HB8260R4890](#) [SCE016MD3MV0W10](#) [20125-21](#) [86640-00](#) [PG-100-](#)
[103GP](#) [PG-100-102RP](#) [PG-100B-102R-H](#) [PG-100B-103R](#) [PG-100B-102R](#) [PG-100N-103R-W](#) [PG-100N-103R](#) [PG-100N-102R](#) [PG-100-](#)
[102GH](#) [PG-100-103RP](#) [PG-100B-103R-M](#)