

# Security Appliance - TC MGUARD RS4000 4G VPN - 2903586

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Security appliance, WAN and 4G mobile network interface, SD card slot, 10 VPN tunnels, intelligent firewall with full scope of functions, router with NAT/1:1 NAT, optional CIFS Integrity Monitoring, 4-port Managed Switch, 2 SIM card slots

## Product Description

The TC MGUARD... security appliances are industrial mobile network routers with mGuard technology. As such, the routers offer a remote maintenance infrastructure for the secure connection of machines and systems via the Internet. A high-speed mobile network interface and a 4-port switch are integrated into a compact metal housing. Secure remote communication on a global scale takes place via 4G LTE as well as UMTS and CDMA networks. With the help of an SD card as a configuration memory, the devices can be quickly and easily started up or replaced. The devices have a buffered realtime clock and Trusted Platform Module (TPM) for secure key generation and management.

## Your advantages

- ✓ High-speed cellular interface with provider redundancy
- ✓ Integrated 4-port switch
- ✓ Maximum security with IPsec protocol on Layer 3
- ✓ Web-based management, SNMP
- ✓ Replaceable configuration memory
- ✓ RS-232 interface with COM server function for integrating serial devices
- ✓ Flexible routing
- ✓ Up to 10 parallel VPN tunnels (up to 250 possible with additional license as an option)
- ✓ Supports current certificates such as x509.v3
- ✓ Stateful inspection firewall for dynamic filtering
- ✓ Extended temperature range



## Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4046356758086

## Technical data

Note

# Security Appliance - TC MGUARD RS4000 4G VPN - 2903586

## Technical data

### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

### Dimensions

Width	45 mm
Height	130 mm
Depth	114 mm

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Altitude	≤ 5000 m (For restrictions, see the manufacturer's declaration for altitude operation)
Degree of protection	IP20

### General

Electrical isolation	VCC // PE
Test voltage data interface/data interface	1 kV (50 Hz, 1 min.)
Test voltage data interface/power supply	1 kV (50 Hz, 1 min.)
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Net weight	630 g
Housing material	Metal
Color	silver
MTTF	532 Years (SN 29500 standard, temperature 25°C, operating cycle 21%)
	250 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%)
	104 Years (SN 29500 standard, temperature 40°C, operating cycle 100%)
Degree of pollution	2
Wireless licences	Europe

### Power supply

Supply voltage range	11 V DC ... 36 V DC (via pluggable COMBICON screw terminal block)
Max. current consumption	< 1.8 A (at 11 V DC (incl. 3 x 125 mA for the outputs))
Typical current consumption	< 320 mA (24 V DC)
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible max.	2.50 mm <sup>2</sup>
Conductor cross section flexible min.	0.20 mm <sup>2</sup>
Conductor cross section solid max.	2.50 mm <sup>2</sup>
Conductor cross section solid min.	0.20 mm <sup>2</sup>
Conductor cross section AWG max.	14
Conductor cross section AWG min.	24

# Security Appliance - TC MGUARD RS4000 4G VPN - 2903586

## Technical data

### Power supply

Stripping length	7 mm
------------------	------

### Interfaces

Interface 1	Ethernet interface, 10/100Base-T(X) in accordance with IEEE 802.3
Interface	Ethernet
No. of ports	6
Connection method	RJ45
Transmission length	100 m (shielded twisted pair)
Protocols supported	TCP/IP, UDP/IP, FTP, HTTP
Auxiliary protocols	ARP, DHCP, PING (ICMP), SNMP V1, SMTP
Basic functions	Router with intelligent firewall and VPN for 10 tunnels (up to 250 supported with optional additional license), CIFS Integrity Monitoring (as an option), metal housing, slot for SD memory card
Interface 2	V.24 (RS-232) interface in acc. with ITU-T V.28, EIA/TIA-232, DIN 66259-1
Interface	RS-232
Connection method	D-SUB 9 plug
File format/coding	UART/NRZ: 8 Data, 1/2 Stop, None/Even/Odd Parity
Transmission length	15 m
Data flow control/protocols	Software handshake, Xon/Xoff or hardware handshake RTS/CTS
Serial transmission speed	9.6; 19.2; 38.4; 57.6; 115.2 kbps

### Wireless interface

Interface description	GSM / GPRS / EDGE / UMTS / HSPA / LTE (FDD)
Frequency range	800 MHz (LTE B20)
	850 MHz (LTE B5)
	900 MHz (LTE B8)
	1700 MHz (LTE B4)
	1800 MHz (LTE B3)
	1900 MHz (LTE B2)
	2100 MHz (LTE B1)
	2600 MHz (LTE B7)
	850 MHz (UMTS/HSPA B5)
	900 MHz (UMTS/HSPA B8)
	1900 MHz (UMTS/HSPA B2)
	2100 MHz (UMTS/HSPA B1)
	850 MHz (2 W (EGSM))
	900 MHz (2 W (EGSM))
	1800 MHz (1 W (EGSM))
	1900 MHz (1 W (EGSM))
Data rate	≤ 150 Mbps (LTE (DL))
	≤ 50 Mbps (LTE (UL))
Antenna	50 Ω impedance SMA antenna socket

# Security Appliance - TC MGUARD RS4000 4G VPN - 2903586

## Technical data

### Wireless interface

SIM interface 1	1.8 volt, 3 volt
GPRS	Class 12, Class B
	CS1 ... CS4
EDGE	Multislot Class 10
UMTS	HSPA 3GPP R9
LTE	CAT4
Network check	LED bar graph to display receive quality
Country support	Europe

### Function

Web-based management	yes
Management	Web-based management, SNMP
Security functions	Supported Supported Supported DES, 3DES, AES-128, -192, -256 ESP tunnel / ESP transport Supported Supported X.509v3 certificates with RSA or PSK MD5, SHA-1 Quick mode, Main mode, PFS RFC 3706 MAC and IP addresses, ports, protocols IP spoofing, DoS and Syn Flood Protection Standard routing, NAT, 1:1-NAT, port forwarding

### Digital outputs

Output name	Digital output
Number of outputs	3
Voltage output signal	10 V DC ... 30 V DC (depending on the operating voltage)
Current output signal	≤ 125 mA (Short-circuit-proof)

### Digital inputs

Description of the input	Digital input
Number of inputs	3
Voltage input signal	10 V DC ... 30 V DC
Current input signal	5 mA

### Conformance/approvals

Designation	CE
Identification	CE-compliant
Designation	Corrosive gas test
Identification	ISA-S71.04-1985 G3 Harsh Group A

### Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Type of test	Free fall in acc. with IEC 60068-2-32
Test result	1 m
Type of test	Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6
Test result	5g, 10...150 Hz, 2.5 h, in XYZ direction
Type of test	Shock in acc. with EN 60068-2-27/IEC 60068-2-27
Test result	Operation: 15g, 11 ms period, half-sine shock pulse
Type of test	Shock in acc. with EN 60068-2-27/IEC 60068-2-27

# Security Appliance - TC MGUARD RS4000 4G VPN - 2903586

## Technical data

### Standards and Regulations

Test result	Storage: 30g, 11 ms period, half-sine shock pulse
Free from substances that could impair the application of coating	according to P-VW 3.10.7 57 65 0 VW-AUDI-Seat central standard
Standards/regulations	EN 61000-4-2
Contact discharge	± 6 kV (Test Level 3)
Standards/regulations	EN 61000-4-3
Frequency range	80 MHz ... 3 GHz (Test Level 3)
Standards/regulations	EN 61000-4-4
Comments	Criterion B
Standards/regulations	EN 61000-4-5
Signal	± 1 kV (Data line, asymmetrical)
Standards/regulations	EN 61000-6-4
	EN 61000-4-6
Frequency range	0.15 MHz ... 80 MHz


### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

# Security Appliance - TC MGuard RS4000 4G VPN - 2903586


Schematic diagram

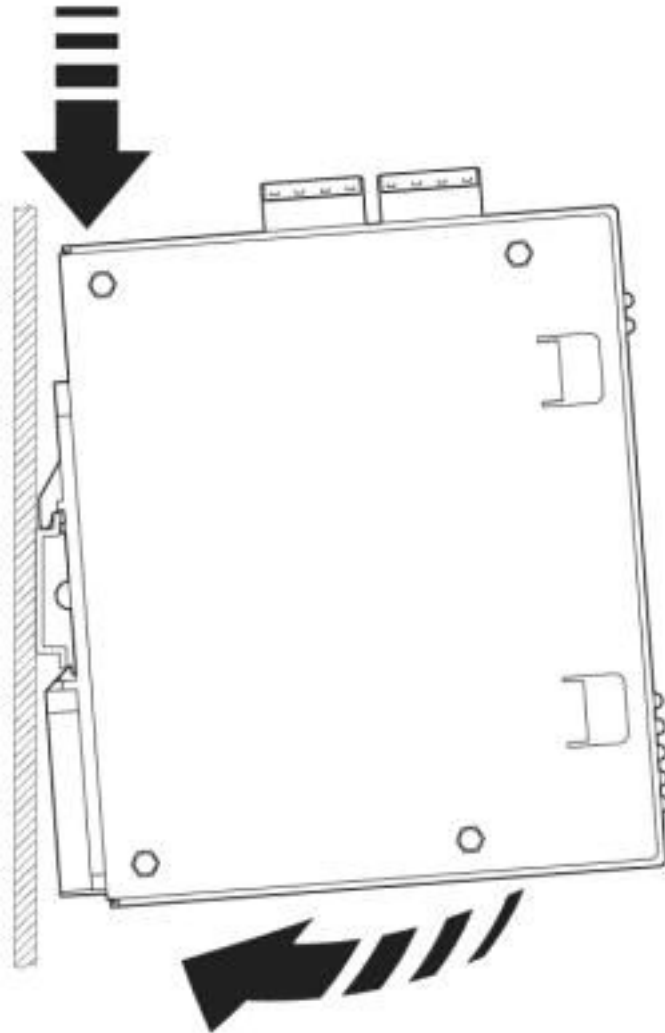

Mounting

# Security Appliance - TC MGUARD RS4000 4G VPN - 2903586


Schematic diagram

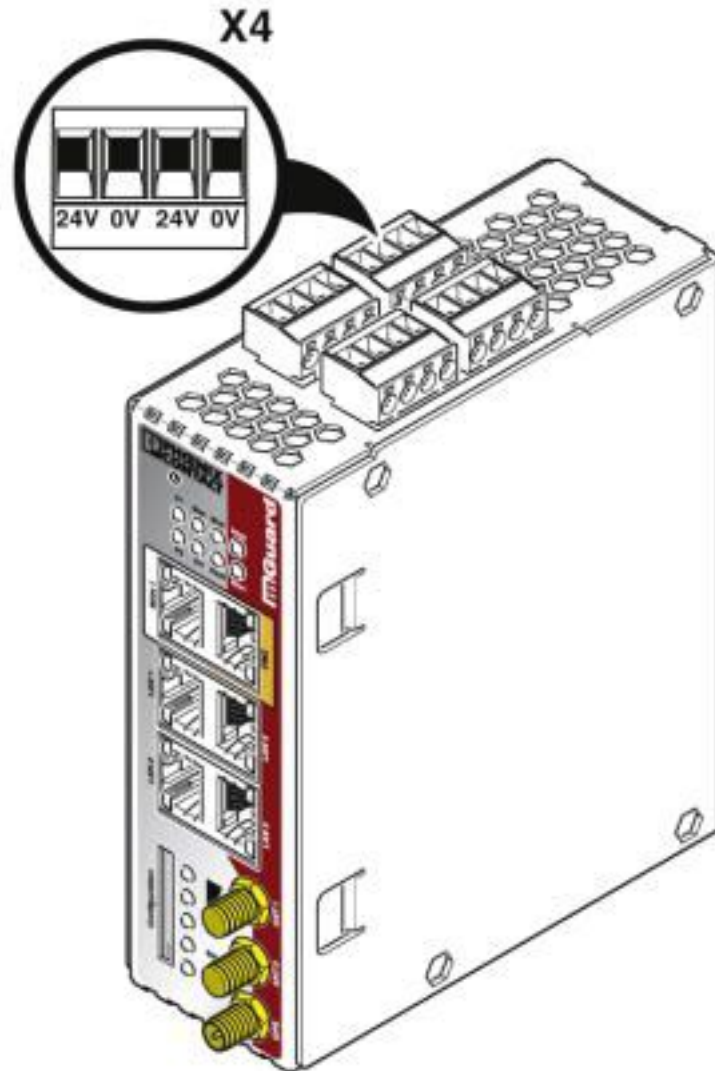

Connecting the supply voltage

# Security Appliance - TC MGUARD RS4000 4G VPN - 2903586

Schematic diagram

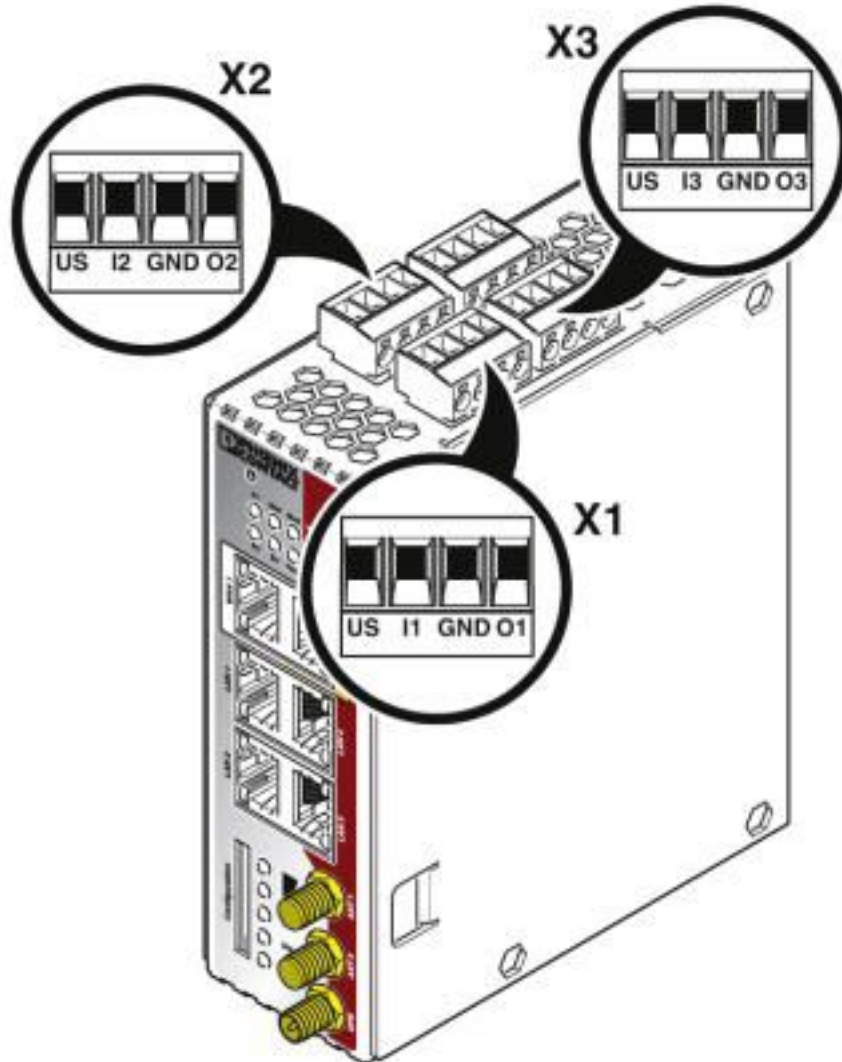


Connection of the cables



## Security Appliance - TC MGuard RS4000 4G VPN - 2903586


Schematic diagram

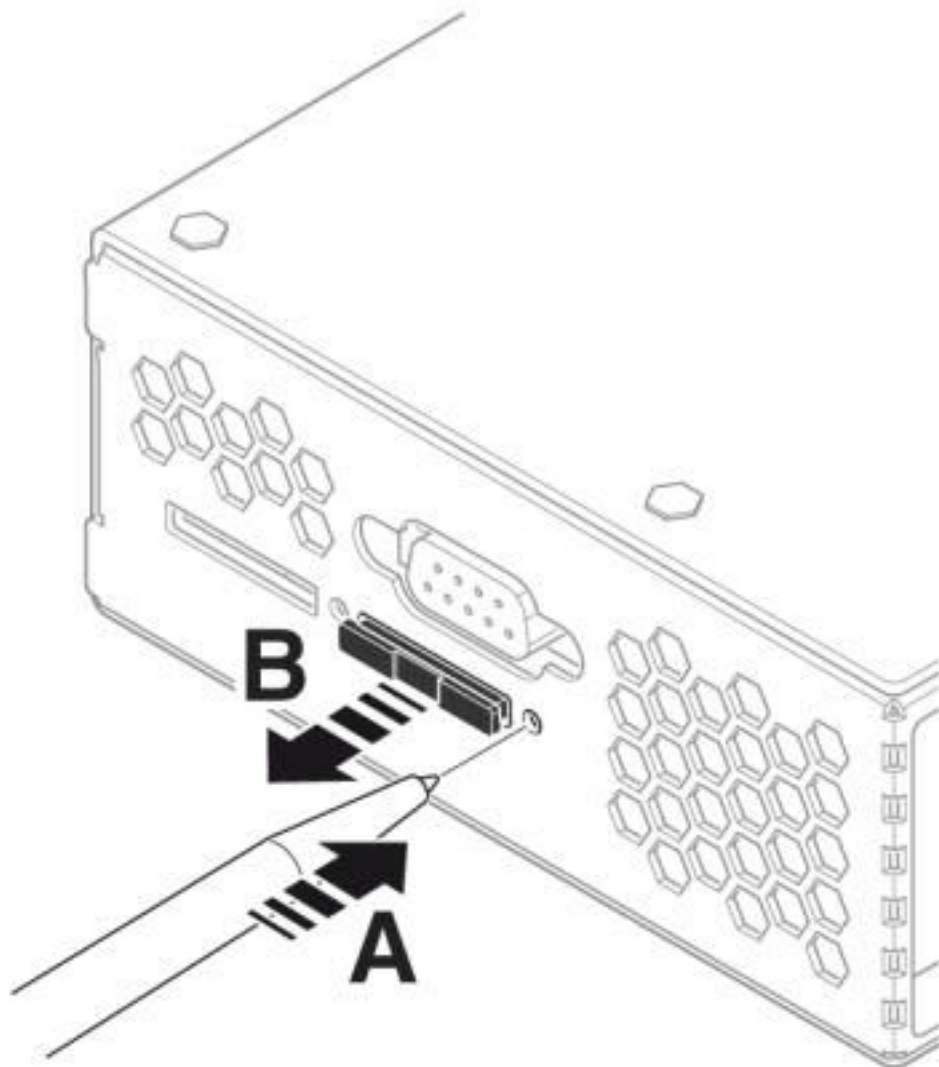

Remove SIM card holder

# Security Appliance - TC MGUARD RS4000 4G VPN - 2903586


Schematic diagram

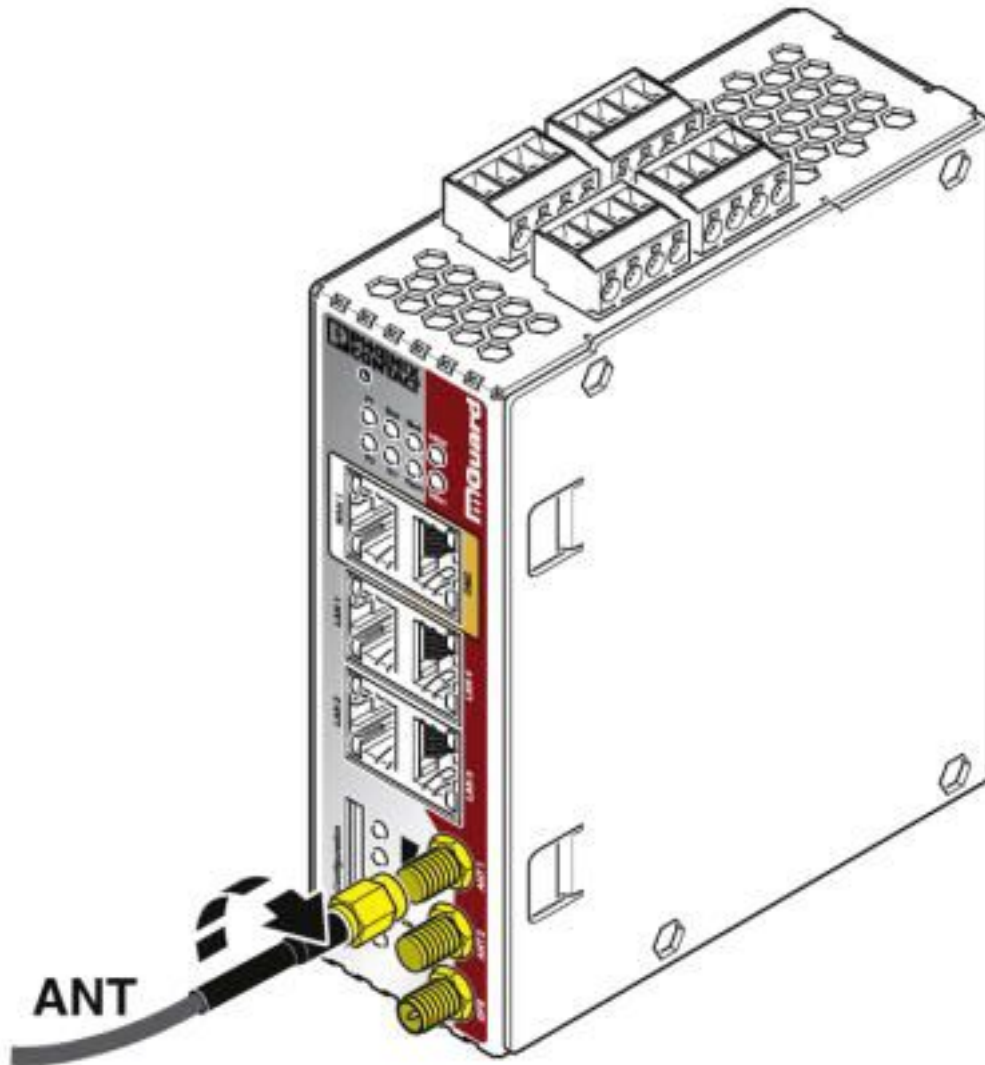

Connect the antenna

# Security Appliance - TC MGuard RS4000 4G VPN - 2903586

Schematic diagram

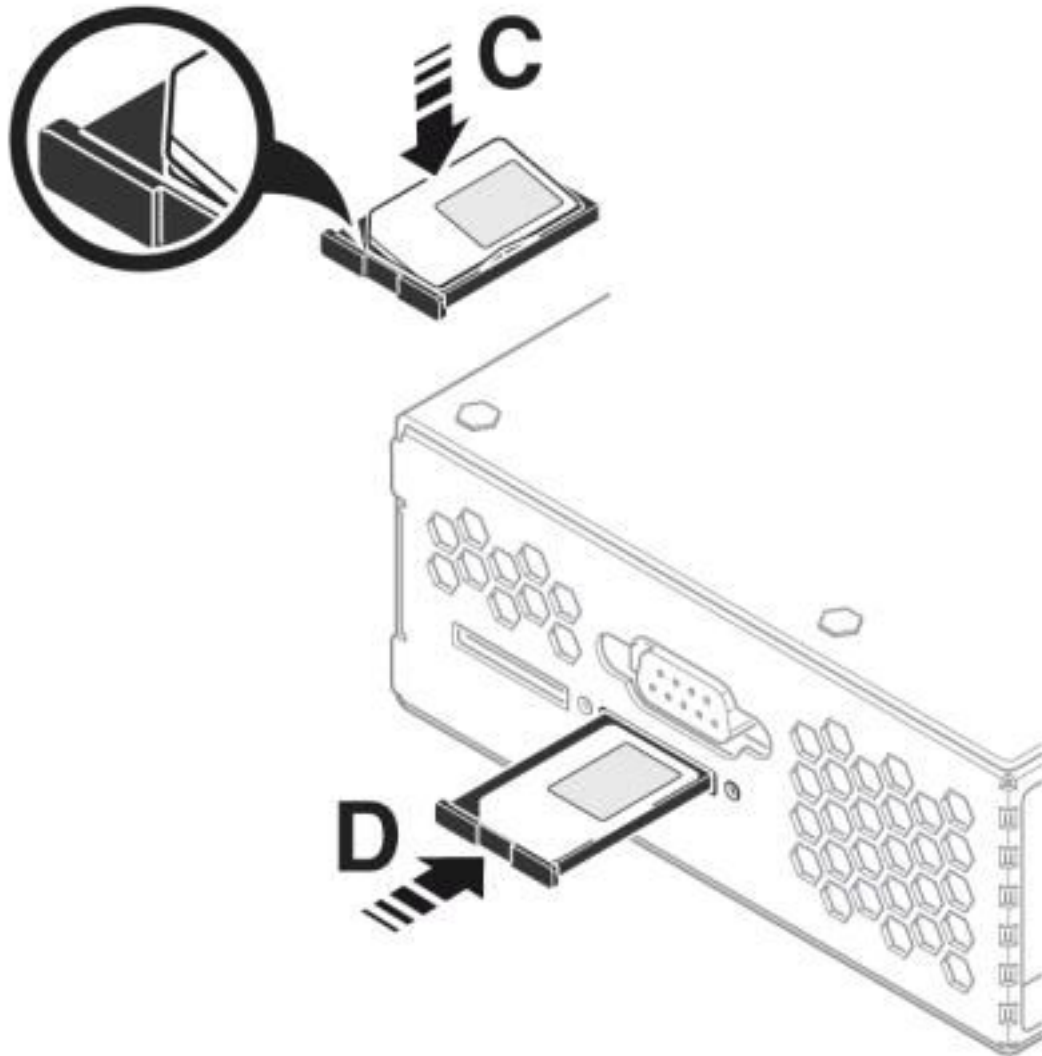

Insert the SIM card

## Classifications

eCl@ss

eCl@ss 10.0.1	19170405
eCl@ss 4.0	27250500
eCl@ss 4.1	27250500
eCl@ss 5.0	19030100
eCl@ss 5.1	19030100
eCl@ss 6.0	19170100
eCl@ss 7.0	19170103
eCl@ss 8.0	19170103

# Security Appliance - TC MGuard RS4000 4G VPN - 2903586

## Classifications

### eCl@ss

eCl@ss 9.0	19170103
------------	----------

### ETIM

ETIM 3.0	EC000313
ETIM 4.0	EC001478
ETIM 5.0	EC001478
ETIM 6.0	EC001478
ETIM 7.0	EC001478

### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	39121311
UNSPSC 12.01	39121311
UNSPSC 13.2	39121311
UNSPSC 18.0	43222609
UNSPSC 19.0	43222609
UNSPSC 20.0	43222609
UNSPSC 21.0	43222609

## Accessories

### Accessories

#### Antenna

Antenna - PSI-GSM/UMTS-QB-ANT - 2313371



GSM UMTS antenna, with omnidirectional characteristic, 2 m antenna cable with SMA round connector

Antenna - TC ANT MOBILE WALL 5M - 2702273



Multiband cellular antenna with mounting bracket for outdoor installation, 5 m antenna cable with SMA circular connector, suitable for LTE/4G

#### Coaxial cable

## Security Appliance - TC MGuard RS4000 4G VPN - 2903586

### Accessories

Antenna cable - PSI-CAB-GSM/UMTS- 5M - 2900980

Cellular antenna cable, 5 m in length, SMA (male) -> SMA (female), 50 ohm impedance



Antenna cable - PSI-CAB-GSM/UMTS-10M - 2900981

Cellular antenna cable, 10 m in length, SMA (male) -> SMA (female), 50 ohm impedance



### Data plug

Assembly tool - FL CRIMPTOOL - 2744869

Crimping pliers, for assembling the RJ45 plugs FL PLUG RJ45..., for assembly on site



### License

License - FL MGuard LIC VPN-250 - 2700193



License for up to 250 additional VPN online connections

License - FL MGuard LIC VPN-10 - 2700194



License for up to 10 additional VPN online connections

### Media converter

## Security Appliance - TC MGuard RS4000 4G VPN - 2903586

### Accessories

FO converters - FL MC EF 1300 MM SC - 2902853



FO converter with SC duplex fiber optic connection (1300 nm), for converting 10/100Base-T(X) to multi-mode fiberglass (50/125 µm). Auto negotiation and auto MDI(X) function. Comprehensive link diagnostics. DIN-rail mountable, 18 ... 30 V DC supply.

---

### Parameterization memory

Memory - SD FLASH 512MB - 2988146



Program and configuration memory, plug-in, 512 Mbyte.

---

### Patch cable

Patch cable - FL CAT5 PATCH 0,5 - 2832263



Patch cable, CAT5, assembled, 0.5 m

---

Patch cable - FL CAT5 PATCH 2,0 - 2832289



Patch cable, CAT5, assembled, 2 m

---

Patch cable - FL CAT5 PATCH 10,0 - 2832629



Patch cable, CAT5, assembled, 10 m

---

### Plug

# Security Appliance - TC MGuard RS4000 4G VPN - 2903586

## Accessories

RJ45 connector - FL PLUG RJ45 GR/2 - 2744856



RJ45 connector, shielded, with bend protection sleeve, 2 pieces, gray for straight cables, for assembly on site. For connections that are not crossed, it is recommended that you use the connector set with gray bend protection sleeve.

RJ45 connector - FL PLUG RJ45 GN/2 - 2744571



RJ45 connector, shielded, with bend protection sleeve, 2 pieces, green for crossed cables, for assembly on site. For connections that are crossed, it is recommended that the connector set with green bend protection sleeves is used.

## Protective cap

Dust protection - FL RJ45 PROTECT CAP - 2832991



Dust protection caps for RJ45 socket

## Remote control software

License - MGuard SECURE VPN CLIENT LIC - 2702579



License for mGuard Secure VPN Client v11.x

## Surge protection for transceiver systems

Surge protection device - CSMA-LAMBDA/4-2.0-BS-SET - 2800491



Attachment plug with Lambda/4 technology as surge protection for coaxial signal interfaces. Connection: Male/female SMA connectors.

## Wireless element

## Security Appliance - TC MGUARD RS4000 4G VPN - 2903586

### Accessories

Wireless module - FL TIMESERVER NTP - 1107132



GNSS receiver and NTP (Network Time Protocol) for Ethernet networks, receives time, date, and location via GPS, GLONASS, or Galileo, web-based management, supply via PoE (af) or 24 V DC, integrated antenna, IP68 housing

---

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Modules](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [I210T1BLK](#) [FC6A-PH1](#) [W4S105C](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC EXTENDER 2001 ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [BCM54291B0IQLEG](#) [7000-P3201-P050150](#) [750-1415](#) [750-1515](#) [750-494](#) [750-495](#) [750-612](#) [750-643](#) [750-652](#) [750-940](#) [753-650/003-000](#) [852-1322](#) [852-1328](#) [852-1812](#) [852-1813](#) [852-1816](#)  
[LANTICK PE-0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [USR-TCP232-T2](#) [2017008](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#)  
[EKI-7708G-4FP-AE](#) [2352903-2](#) [EGU-0702-SFP-T](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [SW-525](#) [SW-725](#) [1005957](#) [1006191](#) [304TX-N](#)  
[WIZ107SR\\_TTL](#) [ES-320](#) [TDKEZW5](#)