

Power supply unit - QUINT4-PS/1AC/12DC/7.5/PT - 2904607

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Primary-switched power supply unit, QUINT POWER, Push-in connection, DIN rail mounting, input: 1-phase, output: 12 V DC / 7.5 A

Your advantages

- ✓ Starting of heavy loads with dynamic boost
- ✓ Preventive function monitoring indicates critical operating states before errors occur
- ✓ High efficiency and long service life, with low power dissipation and low heating
- ✓ Space savings in the control cabinet, thanks to a narrow, slim-line design
- ✓ Fast and easy startup, thanks to tool-free Push-in connection technology



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 055626 255767 |
| GTIN | 4055626255767 |

Technical data

Dimensions

| | |
|--|---------------------------------------|
| Width | 45 mm |
| Height | 106 mm |
| Depth | 90 mm |
| Installation distance right/left (active, passive) | 0 mm / 0 mm ($P_{Out} \leq 50\%$) |
| Installation distance right/left (passive) | 5 mm / 5 mm ($P_{Out} \geq 50\%$) |
| Installation distance right/left (active) | 15 mm / 15 mm ($P_{Out} \geq 50\%$) |
| Installation distance top/bottom (active, passive) | 30 mm / 30 mm ($P_{Out} \leq 50\%$) |
| Installation distance top/bottom (passive) | 30 mm / 30 mm ($P_{Out} \geq 50\%$) |
| Installation distance top/bottom (active) | 30 mm / 30 mm ($P_{Out} \geq 50\%$) |

Ambient conditions

| | |
|----------------------|------|
| Degree of protection | IP20 |
|----------------------|------|

Power supply unit - QUINT4-PS/1AC/12DC/7.5/PT - 2904607

Technical data

Ambient conditions

| | |
|---|--|
| Inflammability class in acc. with UL 94 (housing / terminal blocks) | V0 |
| Ambient temperature (operation) | -25 °C ... 70 °C (> 60 °C Derating: 2.5 %/K) |
| Ambient temperature (start-up type tested) | -40 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing) |
| Climatic class | 3K3 (in acc. with EN 60721) |
| Degree of pollution | 2 |
| Installation height | ≤ 5000 m (> 2000 m, observe derating) |

Input data

| | |
|--|--|
| Input voltage range | 100 V AC ... 240 V AC -15 % ... +10 % 110 V DC ... 250 V DC -20 % ... +40 % |
| Dielectric strength maximum | 300 V AC 60 s |
| Frequency range (f_N) | 50 Hz ... 60 Hz -10 % ... +10 % |
| Discharge current to PE | < 0.25 mA (264 V AC, 60 Hz) |
| Current consumption | 1 A (100 V AC) 0.85 A (120 V AC) 0.46 A (230 V AC) 0.44 A (240 V AC) |
| Nominal power consumption | 96.3 VA |
| Inrush current | typ. 11.4 A (at 25 °C) |
| Mains buffering time | typ. 48 ms (120 V AC) typ. 48 ms (230 V AC) |
| Input fuse | 3.15 A (slow-blow, internal) |
| Recommended breaker for input protection | 6 A ... 16 A (Characteristic B, C or comparable) |
| Type of protection | Transient surge protection |
| Protective circuit/component | Varistor |

Output data

| | |
|--|---|
| Nominal output voltage | 12 V DC |
| Setting range of the output voltage (U_{Set}) | 12 V DC ... 15 V DC (constant capacity) |
| Nominal output current (I_N) | 7.5 A |
| Dynamic Boost ($I_{Dyn.Boost}$) | 12.75 A (≤ 60 °C (5 s)) |
| Connection in parallel | Yes, for redundancy and increased capacity |
| Connection in series | yes |
| Feedback voltage resistance | ≤ 25 V DC |
| Protection against overvoltage at the output (OVP) | ≤ 18 V DC |
| Control deviation | < 0.3 % (Static load change 10 % ... 90 %) < 3 % (Dynamic load change 10 % ... 90 %, (10 Hz)) < 0.1 % (change in input voltage ±10 %) |
| Residual ripple | < 35 mV _{PP} (with nominal values) |

Power supply unit - QUINT4-PS/1AC/12DC/7.5/PT - 2904607

Technical data

Output data

| | |
|--|--------------------|
| Output power | 90 W |
| Typical response time | 300 ms |
| Maximum power dissipation in no-load condition | < 0.6 W (230 V AC) |
| | < 0.6 W (120 V AC) |
| Power loss nominal load max. | < 8.1 W (120 V AC) |
| | < 7.1 W (230 V AC) |

General

| | |
|---|------------------------|
| Net weight | 0.3 kg |
| Efficiency | typ. 91.5 % (120 V AC) |
| | typ. 92.5 % (230 V AC) |
| MTBF (IEC 61709, SN 29500) | > 1221000 h (25 °C) |
| | > 671000 h (40 °C) |
| | > 248000 h (60 °C) |
| Insulation voltage input/output | 4 kV AC (type test) |
| | 3 kV AC (routine test) |
| Degree of protection | IP20 |
| Protection class | II |
| Inflammability class in acc. with UL 94 (housing / terminal blocks) | V0 |

Connection data, input

| | |
|---------------------------------------|---------------------|
| Connection method | Push-in connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 14 |
| Stripping length | 10 mm |

Connection data, output

| | |
|---------------------------------------|---------------------|
| Connection method | Push-in connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 14 |
| Stripping length | 10 mm |

Connection data for signaling

| | |
|------------------------------------|---------------------|
| Connection method | Push-in connection |
| Conductor cross section solid min. | 0.2 mm ² |

Power supply unit - QUINT4-PS/1AC/12DC/7.5/PT - 2904607

Technical data

Connection data for signaling

| | |
|---------------------------------------|---------------------|
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 14 |
| Stripping length | 10 mm |

Standards

| | |
|--|------------------------|
| Standard - Safety of transformers | EN 61558-2-16 |
| Standard - safety for equipment for measurement, control, and laboratory use | IEC 61010-1 |
| Standard – Safety extra-low voltage | IEC 61010-1 (SELV) |
| | IEC 61010-2-201 (PELV) |
| Standard - Safe isolation | IEC 61558-2-16 |
| Standard – Limitation of mains harmonic currents | EN 61000-3-2 |

Conformance/approvals

| | |
|--------------|--|
| UL approvals | UL Listed UL 61010-1 |
| | UL Listed UL 61010-2-201 |
| | ANSI/UL 121201 Class I, Division 2, Groups A, B, C, D (Hazardous Location) |
| SIQ | CB-Scheme (IEC 61010-1, IEC 61010-2-201) |

EMC data

| | |
|-------------------------------|---|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
| Conducted noise emission | EN 55016 |
| | EN 61000-6-3 (Class B) |
| Noise emission | EN 55016 |
| | EN 61000-6-3 (Class B) |
| Harmonic currents | EN 61000-3-2 |
| | EN 61000-3-2 (Class A) |
| Flicker | EN 61000-3-3 |
| Electrostatic discharge | EN 61000-4-2 |
| Contact discharge | 8 kV (Test Level 4) |
| Discharge in air | 15 kV (Test Level 4) |
| Electromagnetic HF field | EN 61000-4-3 |
| Frequency range | 80 MHz ... 1 GHz |
| Test field strength | 20 V/m (Test Level 3) |
| Frequency range | 1 GHz ... 6 GHz |
| Test field strength | 10 V/m (Test Level 3) |
| Comments | Criterion A |
| Fast transients (burst) | EN 61000-4-4 |
| Input | 4 kV (Test Level 4 - asymmetrical) |

Power supply unit - QUINT4-PS/1AC/12DC/7.5/PT - 2904607

Technical data

EMC data

| | |
|--------------------------------|-------------------------------------|
| Output | 4 kV (Test Level 4 - asymmetrical) |
| Signal | 4 kV (Test Level 4 - asymmetrical) |
| Comments | Criterion A |
| Surge voltage load (surge) | EN 61000-4-5 |
| Input | 2 kV (Test Level 4 - symmetrical) |
| | 4 kV (Test Level 4 - asymmetrical) |
| Output | 1 kV (Test Level 3 - symmetrical) |
| | 2 kV (Test Level 3 - asymmetrical) |
| Signal | 0.5 kV (Test Level 2 - symmetrical) |
| Comments | Criterion A |
| Conducted interference | EN 61000-4-6 |
| I/O/S | asymmetrical |
| Frequency range | 0.15 MHz ... 80 MHz |
| Voltage | 10 V (Test Level 3) |
| Comments | Criterion A |
| Power frequency magnetic field | EN 61000-4-8 |
| Frequency | 16.67 Hz |
| | 50 Hz |
| | 60 Hz |
| Test field strength | 100 A/m |
| Additional text | 60 s |
| Comments | Criterion A |
| Frequency | 50 Hz |
| | 60 Hz |
| Frequency range | 50 Hz ... 60 Hz |
| Test field strength | 1 kA/m |
| Additional text | 3 s |
| Frequency | 0 Hz |
| Test field strength | 300 A/m |
| Additional text | DC, 60 s |
| Voltage dips | EN 61000-4-11 |
| Voltage | 100 V AC |
| Frequency | 60 Hz |
| Voltage dip | 70 % |
| Number of periods | 0.5 / 1 / 30 periods |
| Additional text | Test Level 2 |
| Comments | Criterion A |
| Voltage dip | 40 % |
| Number of periods | 5 / 10 / 50 periods |
| Additional text | Test Level 2 |

Power supply unit - QUINT4-PS/1AC/12DC/7.5/PT - 2904607

Technical data

EMC data


| | |
|--|--|
| Comments | Criterion B |
| Voltage dip | 0 % |
| Number of periods | 0.5 / 1 / 5 / 50 periods |
| Additional text | Test Level 2 |
| Comments | Criterion B |
| Pulse-shape magnetic field | EN 61000-4-9 |
| Test field strength | 1000 A/m |
| Comments | Criterion A |
| Attenuated sinusoidal oscillations (ring wave) | EN 61000-4-12 |
| Input | 2 kV (symmetrical) |
| | 4 kV (asymmetrical) |
| Comments | Criterion A |
| Asymmetrical conducted disturbance variables | EN 61000-4-16 |
| Test level 1 | 16.67 Hz 50 Hz 60 Hz 150 Hz 180 Hz (Test Level 3) |
| Voltage | 30 V (10 s) |
| Test level 2 | 16.67 Hz 50 Hz 60 Hz (Test Level 2) |
| Voltage | 300 V (1 s) |
| Comments | Criterion A |
| Attenuated oscillating wave | EN 61000-4-18 |
| Voltage | 1 kV (symmetrical) |
| | 2.5 kV (asymmetrical) |
| | 1 kV (symmetrical) |
| Comments | Criterion A |
| Criterion A | Normal operating behavior within the specified limits. |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself. |
| Criterion C | Temporary adverse effects on the operating behavior, which the device corrects automatically or which can be restored by actuating the operating elements. |

Drawings


Power supply unit - QUINT4-PS/1AC/12DC/7.5/PT - 2904607

Schematic diagram

Housing

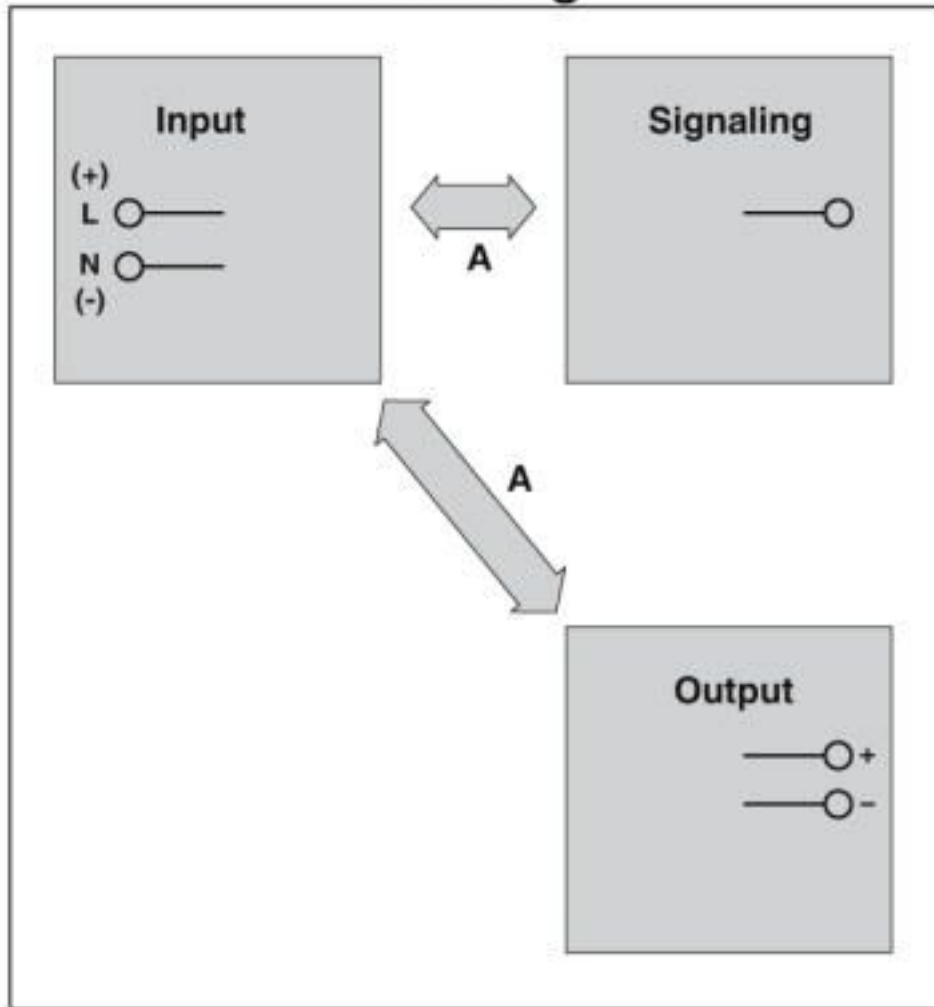


Block diagram

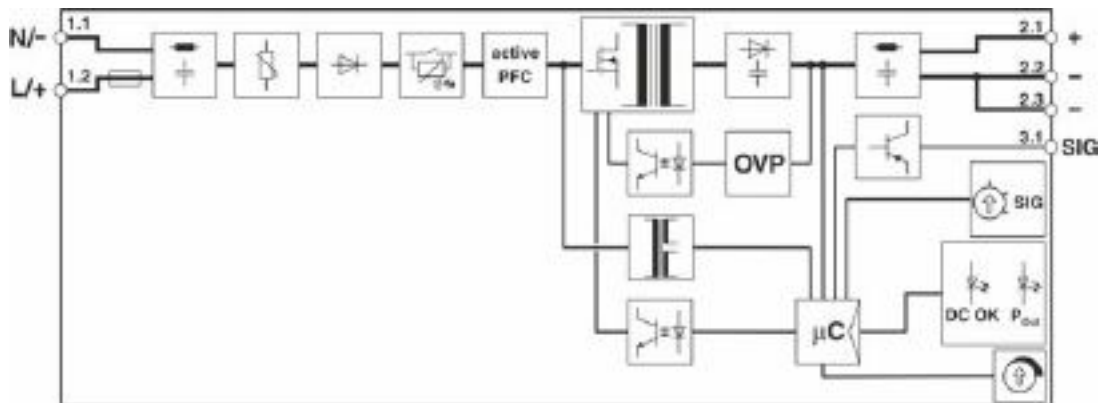


Power supply unit - QUINT4-PS/1AC/12DC/7.5/PT - 2904607

Diagram

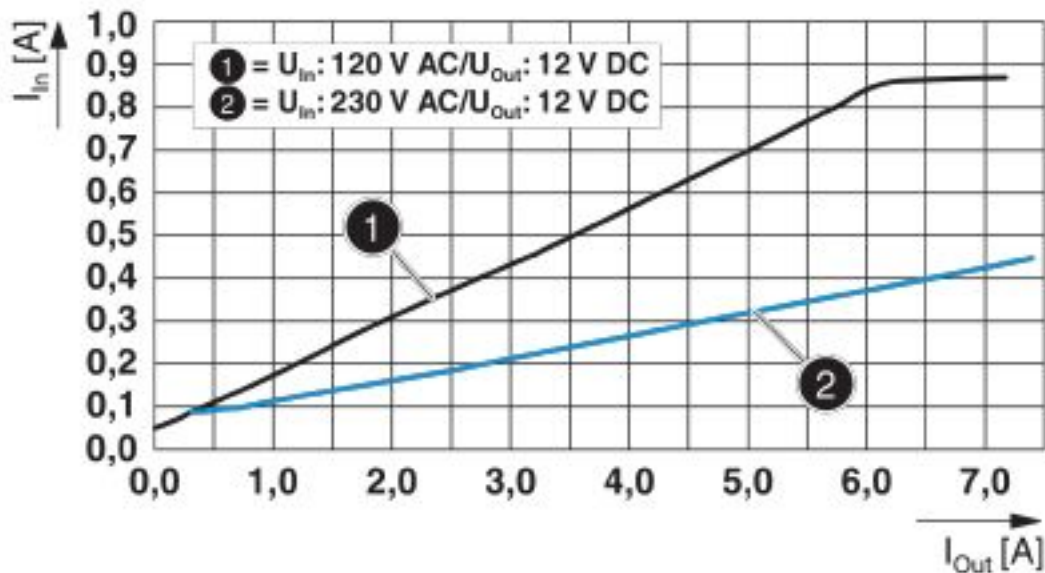


Diagram

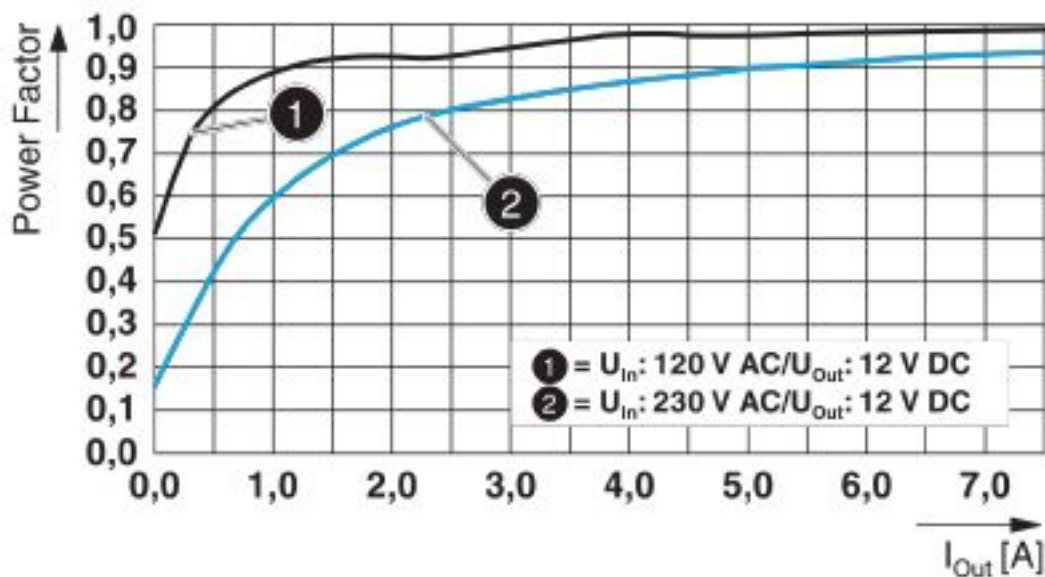

Power supply unit - QUINT4-PS/1AC/12DC/7.5/PT - 2904607

Diagram

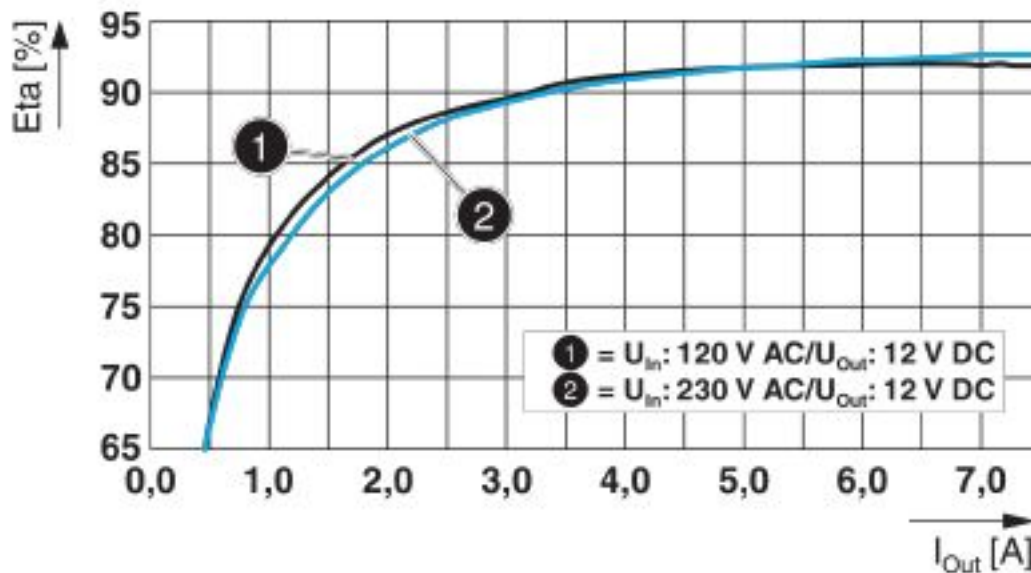

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27040701 |
| eCl@ss 5.1 | 27242213 |
| eCl@ss 6.0 | 27049000 |
| eCl@ss 7.0 | 27049002 |
| eCl@ss 8.0 | 27049002 |
| eCl@ss 9.0 | 27040701 |

ETIM

| | |
|----------|----------|
| ETIM 5.0 | EC002540 |
| ETIM 6.0 | EC002540 |
| ETIM 7.0 | EC002540 |

UNSPSC

| | |
|-------------|----------|
| UNSPSC 13.2 | 39121004 |
| UNSPSC 18.0 | 39121004 |
| UNSPSC 19.0 | 39121004 |
| UNSPSC 20.0 | 39121004 |
| UNSPSC 21.0 | 39121004 |

Approvals

Approvals

Power supply unit - QUINT4-PS/1AC/12DC/7.5/PT - 2904607

Approvals

Approvals

UL Listed / IECEE CB Scheme / cUL Listed / EAC / DNV GL / cULus Listed

Ex Approvals

UL Listed / cUL Listed / cULus Listed

Approval details

| | | | |
|-----------|--|---|---------------|
| UL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 123528 |
|-----------|--|---|---------------|

| | | | |
|-----------------|--|---|---------|
| IECEE CB Scheme | | http://www.iecee.org/ | SI-7008 |
|-----------------|--|---|---------|

| | | | |
|------------|--|---|---------------|
| cUL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 123528 |
|------------|--|---|---------------|

| | | | |
|-----|--|--|---------------------|
| EAC | | | RU*DE*08.B.01873/19 |
|-----|--|--|---------------------|

| | | | |
|--------|--|---|------------|
| DNV GL | | https://approvalfinder.dnvgl.com/ | TAA00001SN |
|--------|--|---|------------|

| | | | |
|--------------|--|--|--|
| cULus Listed | | | |
|--------------|--|--|--|

Accessories

Accessories

Device protection

Power supply unit - QUINT4-PS/1AC/12DC/7.5/PT - 2904607

Accessories

Type 3 surge protection device - PLT-SEC-T3-230-FM-UT - 2907919



Type 2/3 surge protection, consisting of protective plug and base element with screw connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage 230 V AC/DC.

Type 3 surge protection device - PLT-SEC-T3-24-FM-UT - 2907916



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage 24 V AC/DC.

Type 3 surge protection device - PLT-SEC-T3-230-FM-PT - 2907928



Type 2/3 surge protection, consisting of protective plug and base element with Push-in connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage 230 V AC/DC.

Type 3 surge protection device - PLT-SEC-T3-24-FM-PT - 2907925



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage 24 V AC/DC.

Screwdriver tools

Screwdriver - SF-SL 0,4X2,0-60 - 1212546



Screwdriver, flat bladed, size: 0.4 x 2.0 x 60 mm, 2-component grip, with non-slip grip

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Power Supplies](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[PS-S6024](#) [DVP01PU-S](#) [DVP06AD-S](#) [DVP06XA-S](#) [DVDPNET-SL](#) [DVPDT01-S](#) [DVPPS01](#) [PS-6012](#) [PS9Z-5R1G](#) [PS-C24024](#)
[DVP08ST11N](#) [DVPACAB530](#) [DVPCOPM-SL](#) [DVPEN01-SL](#) [DVPPF01-S](#) [ADNB008-48-1PM-C](#) [ADNB017-24-1PM-C](#) [ADNB040-24-1PM-C](#) [ADNB034-12-1PM-C](#) [SS14011524](#) [PS-UPS40](#) [PSC-6024](#) [PSD-A60W12](#) [96PS-A120WDIN](#) [PSD-A60W48](#) [PSD-A40W12](#) [PSD-A40W24](#) [SMP21-L20-DC24V-5A](#) [PSD-A40W48](#) [S8T-DCBU-02](#) [PS-S4024](#) [NTPS-24-1.3](#) [PST-96024](#) [S82YVSC4P](#) [PS-S4005](#) [PS-10024](#)
[PS-S10024](#) [PS-C12024](#) [PSP-480S24](#) [PS-C48024](#) [PSC-2024](#) [PSC-4012](#) [PSC-4048](#) [PSC-9615](#) [PSC-15124](#) [PSC-15148](#) [PSC-24148](#) [PSC-48148](#) [TRIO-PS-2G/1AC/12DC/5/C2LP](#) [QUINT4-PS/1AC/12DC/15](#)