

Solid-state relays - ST-OV3- 24DC/400AC/3 - 2905417

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug-in power solid-state relay, input: 24 V DC, output: 24 - 420 V AC/max. 3 A

The figure shows version ST-OV 3-5 DC/240 AC/3

Your advantages

- Pluggable
- Control of 230 V motors in simple reversing mode (e.g., synchronous motor in single-phase mode, see illustration)
- Switching of up to 400 V AC/3 A



Key Commercial Data

Packing unit	10 pc
GTIN	
GTIN	4017918079406

Technical data

Dimensions

Width	20.8 mm
Height	42.5 mm
Depth	112 mm

Ambient conditions

Ambient temperature (operation)	0 °C ... 60 °C
Ambient temperature (storage/transport)	0 °C ... 70 °C

Input data

Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	0.9 ... 1.1
Input voltage range	21.6 V DC ... 26.4 V DC
Switching threshold "0" signal in reference to U_N	≤ 0.4

Solid-state relays - ST-OV3- 24DC/400AC/3 - 2905417

Technical data

Input data

Switching threshold "1" signal in reference to U _N	≥ 0.8
Typical input current at U _N	7 mA
Operating voltage display	Yellow LED
Type of protection	Reverse polarity protection
	RC element
Protective circuit/component	RC element
Transmission frequency	10 Hz
Power dissipation for nominal condition	0.17 W

Output data

Output nominal voltage	400 V AC
Output voltage range	24 V AC ... 420 V AC
Limiting continuous current	3 A (see derating curve)
Maximum inrush current	125 A (t = 10 ms)
Min. load current	50 mA
Leakage current	approx. 12 mA
Surge current	125 A (t = 10 ms)
Peak offstate voltage	800 V (Periodic peak reverse voltage)
Voltage drop at max. limiting continuous current	≤ 1.2 V
Type of protection	Surge protection
	RC element
Protective circuit/component	Varistor
	RC element

General

Test voltage input/output	2.5 kV AC
	2.5 kV AC
Mounting position	Horizontal DIN rail
Standards/regulations	IEC 60664
	EN 50178
Degree of pollution	2
Overvoltage category	III

Standards and Regulations

Standards/regulations	IEC 60664
	EN 50178
Insulation	Basic insulation
Degree of pollution	2
Overvoltage category	III

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50

Solid-state relays - ST-OV3- 24DC/400AC/3 - 2905417


Technical data

Environmental Product Compliance


	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"
--	---

Drawings


Diagram



Diagram

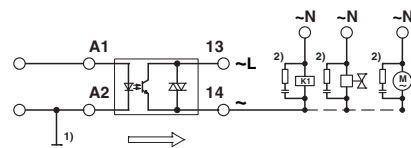

Circuit diagram



Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.A*30.B.01082
-----	--	--------------------------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Relays - PCB Mount](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[M86F-2W](#) [M90F-2Y](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [923812OCAS](#) [PLA134S](#) [DS11-1005](#) [AQV212J](#)
[AQY412EHAJ](#) [EFR1200480A150](#) [901-7](#) [LCA220](#) [LCB110S](#) [1618400-5](#) [SR75-1ST](#) [AQH2213AJ](#) [AQV112KLJ](#) [AQV212AJ](#) [AQV212SXJ](#)
[AQV238AD01](#) [AQW414TS](#) [AQY221N2SYD01](#) [AQY221R2VJ](#) [AQY275AXJ](#) [AQY414SXE01](#) [G2-1A02-ST](#) [G2-1A03-ST](#) [G2-1A03-TT](#)
[G2-1A05-ST](#) [G2-1A06-TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [CPC1333GR](#)
[3-1617776-2](#) [CTA2425](#) [TLP3131\(F\)](#) [LBA110S](#) [LBB110S](#) [LCA110LSTR](#) [LCB126S](#) [WPPM-0626D](#) [WPPM-3526D](#) [WPPM-3588D](#)