

Monitoring relay - EMD-SL-PH-690 - 2905597

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Monitoring relay for monitoring phase sequence, phase failure, and asymmetry for 208 V AC ... 690 V AC from 3-phase voltages, 2 PDTs, with screw connection

Product Description

Increasingly higher demands are being placed on safety and system availability - across all sectors. Processes are becoming more and more complex, not only in mechanical engineering and the chemical industry, but also in plant and automation technology. Demands on power engineering are also increasing constantly. Error-free and therefore cost-effective operation can only be achieved through continuous monitoring of important network and system parameters. Electronic monitoring relays in the EMD series are available for a wide range of monitoring tasks to avoid the consequences of errors or to keep them within limits. The operating states are indicated using colored LEDs, errors that may occur can be sent to a control system via a floating contact or can shut down a part of the system. Some device versions are equipped with startup and response delays in order to briefly tolerate measured values outside the set monitoring range.



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 967198
GTIN	4046356967198

Technical data

Dimensions

Width	22.5 mm
Height	90 mm
Depth	113 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 70 °C (C300)
	-25 °C ... 55 °C (B300)
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	15 % ... 85 %
Degree of protection	IP40 (Housing)
	IP20 (Connection terminal blocks)

Monitoring relay - EMD-SL-PH-690 - 2905597

Technical data

Ambient conditions

Noise immunity	EN 61326-1
----------------	------------

Input data

Nominal input voltage U_N	690 V (3~ 208 V ... 690 V)
Input voltage range	177 V ... 794 V (3~)
Function	Undervoltage, phase sequence, phase failure
Min setting range of the voltage threshold value	177 V AC
Max. setting range of the voltage threshold value	794 V AC
Setting range for response delay	0.1 s ... 10 s
Basic accuracy	$\leq 3\%$ (of scale end value)
Setting accuracy	$\leq 5\%$ (of scale end value)
Repeat accuracy	$\leq 2\%$
Asymmetry	25 %
Recovery time	> 500 ms

Contact side

Contact type	2 floating PDT contacts
Maximum switching voltage	400 V AC
Interrupting rating (ohmic load) max.	1250 VA (5 A/250 V AC at +55 °C)
	150 VA (5 A/30 V DC at +55 °C)
	75 VA (2.5 A/30 V DC at +70 °C)
Output fuse	5 A (fast-blow)

Power supply

Supply voltage	$\pm 15\%$ (= measuring voltage)
----------------	----------------------------------

General

Mechanical service life	20×10^6 cycles
Operating mode	100% operating factor
Mounting position	any
Assembly instructions	on standard DIN rail NS 35 in accordance with EN 60715
Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Housing insulation material	Polyamide PA, self-extinguishing
Color	green

Connection data

Connection method	Screw connection
Stripping length	8 mm
Conductor cross section solid	0.5 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.5 mm ² ... 2.5 mm ²
Conductor cross section AWG	20 ... 14
Tightening torque	1 Nm

Standards and Regulations

Monitoring relay - EMD-SL-PH-690 - 2905597

Technical data

Standards and Regulations


Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Noise emission	EN 61326-1
Noise immunity	EN 61326-1
Standards/regulations	IEC 60664-1
Rated insulation voltage	250 V (Output circuit)
Rated surge voltage	6 kV
Pollution degree	3
Overvoltage category	III
Low Voltage Directive	Conformance with LV directive 2006/95/EC

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Block diagram

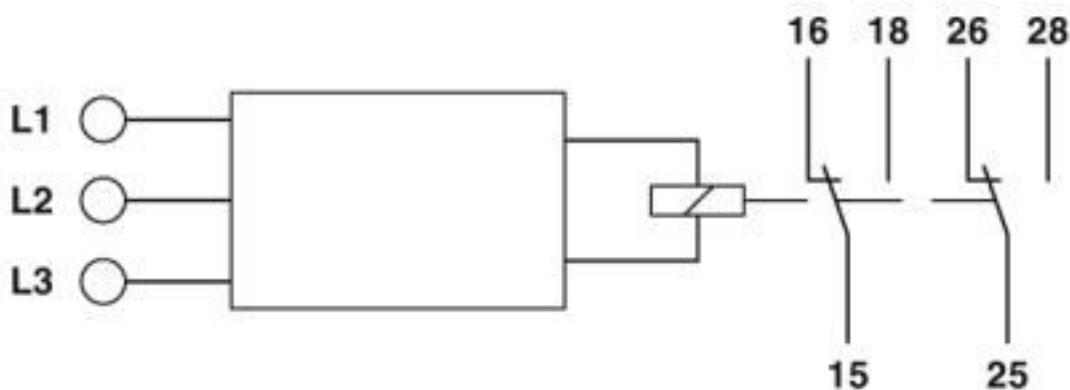

Classifications

eCl@ss

eCl@ss 10.0.1	27371803
eCl@ss 5.0	27371800
eCl@ss 5.1	27371800
eCl@ss 6.0	27371800
eCl@ss 7.0	27371803
eCl@ss 8.0	27371803
eCl@ss 9.0	27371803

ETIM

ETIM 4.0	EC001441
ETIM 5.0	EC001441

Monitoring relay - EMD-SL-PH-690 - 2905597

Classifications

ETIM

ETIM 6.0	EC001441
ETIM 7.0	EC001441

UNSPSC

UNSPSC 13.2	41113637
UNSPSC 18.0	39121106
UNSPSC 19.0	39121106
UNSPSC 20.0	39121106
UNSPSC 21.0	39121106

Approvals

Approvals

Approvals

UL Listed / cUL Listed / EAC / EAC / cULus Listed

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 172140
-----------	--	---	---------------

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 172140
------------	--	---	---------------

EAC		TR_TS_D_00573_c
-----	--	-----------------

EAC		RU*C- DE.*08.B.00010
-----	--	-------------------------

cULus Listed		
--------------	--	--

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [G88104401](#) [OACU](#) [C4SWOUT](#) [PB16H](#)
[G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [G78-16-E](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#)
[70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-](#)
[HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#) [70MRCK24-DIN](#) [6202](#) [6402](#) [PI/NI-2D/24](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#)
[FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#)