

Interface card - 1771-CARDEDGE12/D25F - 2908757

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Allen-Bradley® PLC-5 migration board used to convert 1771 I/O and pre-wired 12-position swing arm (1771-WB or 1771-WD) to 25-position (female) D-SUB socket

Your advantages

- Durable PCB designed to easily mount within 1771 chassis
- Card edge connection with locking tab
- Quick cable connection via D-SUB 25 female connector

Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 365732
GTIN	4055626365732

Technical data

Dimensions

Width	254 mm
Height	153.2 mm
Depth	21.3 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C

General

Nominal voltage U_N	max. 125 V AC/DC
Max. perm. current (per branch)	2 A
Number of positions	12
Status display	No

Connection data

Interface card - 1771-CARDEDGE12/D25F - 2908757

Technical data

Connection data

Connection name	PCB edge contact
Number of positions	12
Connection name	PCB edge contact
Number of positions	12

Supported controller

Controller	Allen-Bradley® 1771 (PLC5)
- suitable I/O card	1771-ASB
	1771-DL
	1771-ID
	1771-OD
	1771-ODZ
	1771-OW
	1771-OY
	1771-OYL
	1771-OZ
	1771-OZL
	1771-PM



Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Interface card - 1771-CARDEDGE12/D25F - 2908757

Dimensional drawing

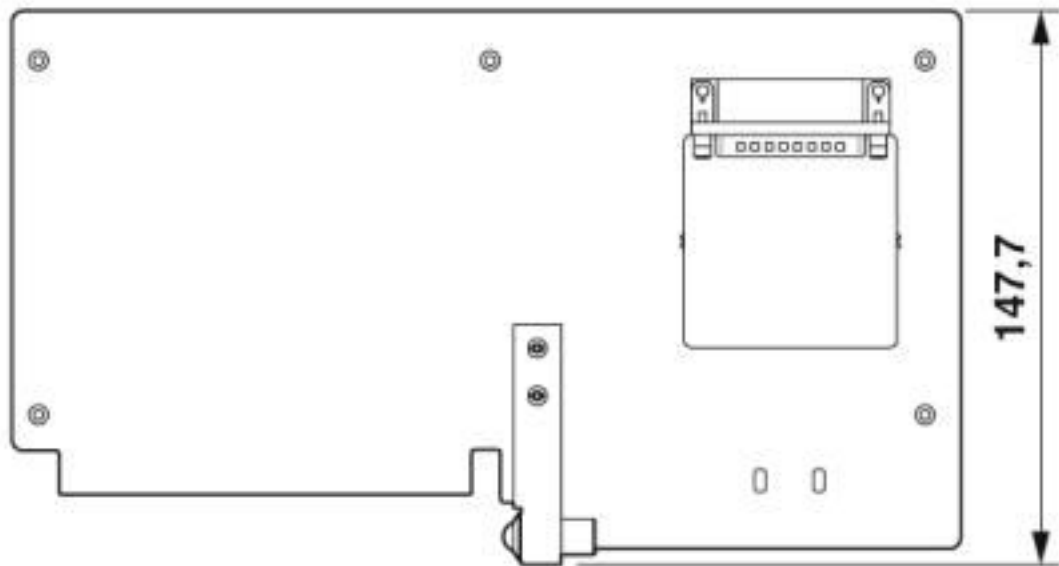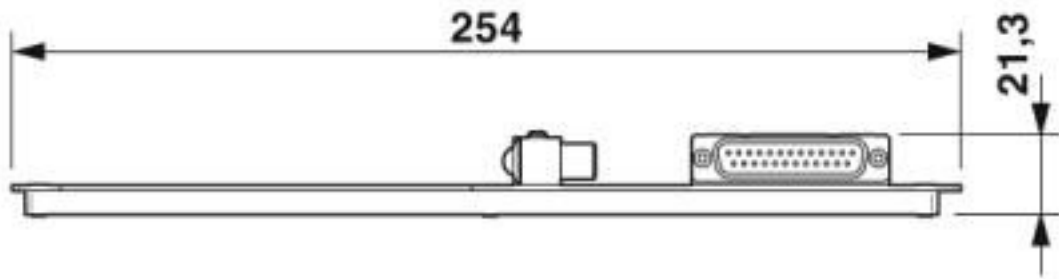

Interface card - 1771-CARDEDGE12/D25F - 2908757

Circuit diagram

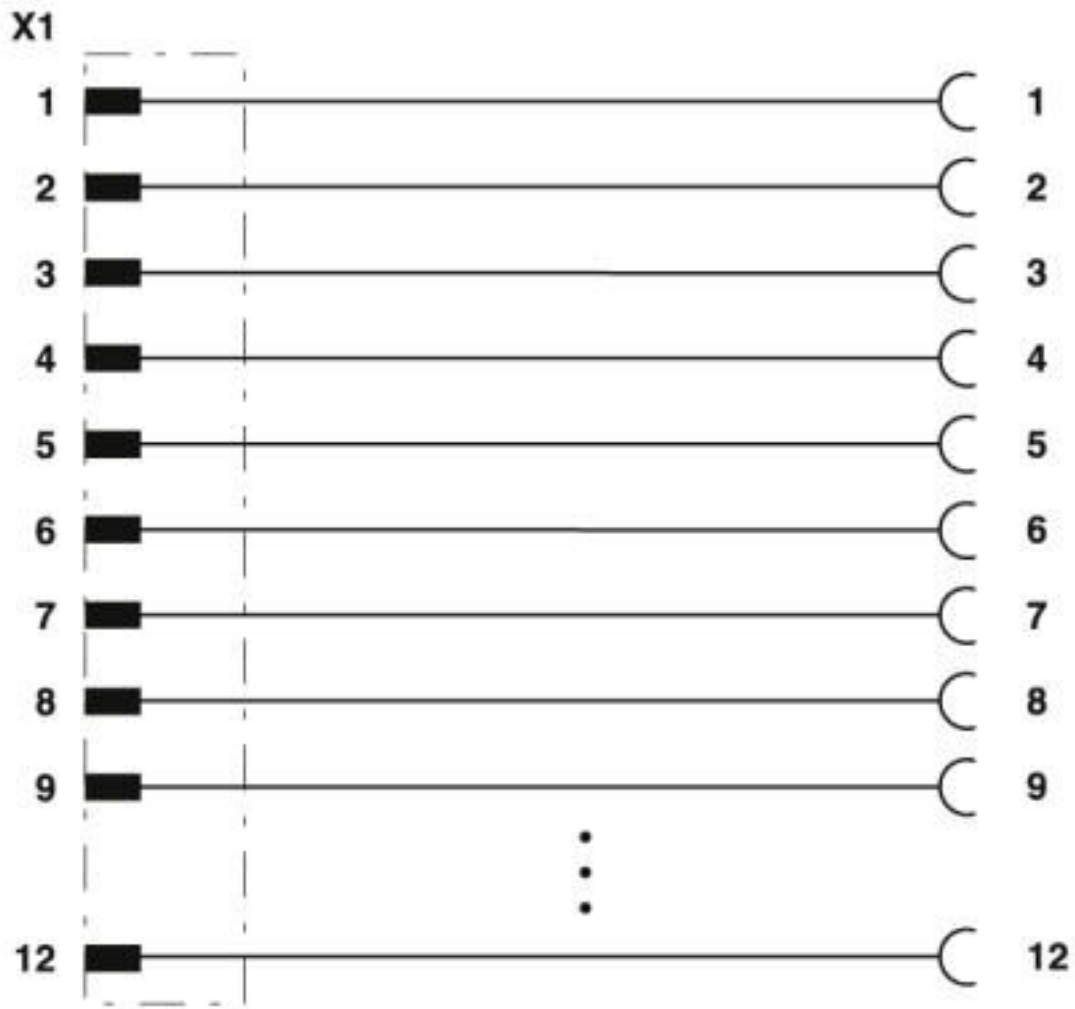

Classifications

eCl@ss

eCl@ss 10.0.1	27141152
eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

ETIM

ETIM 4.0	EC002780
ETIM 5.0	EC002780

Interface card - 1771-CARDEDGE12/D25F - 2908757

Classifications

ETIM

ETIM 6.0	EC002780
ETIM 7.0	EC002780

Accessories

Accessories

System cable

Cable - CABLE-D-25SUB/M/OE/0,25/S/0,5M - 2926506



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 0.5 m

Cable - CABLE-D-25SUB/M/OE/0,25/S/1,0M - 2926519



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 1 m

Cable - CABLE-D-25SUB/M/OE/0,25/S/1,5M - 2926522



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 1.5 m

Cable - CABLE-D-25SUB/M/OE/0,25/S/2,0M - 2926535



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 2 m

Interface card - 1771-CARDEDGE12/D25F - 2908757

Accessories

Cable - CABLE-D-25SUB/M/OE/0,25/S/3,0M - 2926548



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 3 m

Cable - CABLE-D-25SUB/M/OE/0,25/S/4,0M - 2926551



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 4 m

Cable - CABLE-D-25SUB/M/OE/0,25/S/6,0M - 2926564



Assembled shielded round cable; connection 1: Single wires (25-position) (The wires are marked and fitted with ferrules. The braided shield is routed to a separate cable end.); connection 2: D-SUB pin strip (1x 25-position); cable length: 6 m

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [Phoenix Contact](#) manufacturer:

Other Similar products are found below :

[61FGPN8DAC120](#) [CV500SLK21](#) [70177-1011](#) [F03-03 HAS C](#) [F03-31](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [H2CRSAC110B](#)
[R88A-CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DRT2ID08C](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [E53-AZ01](#)
[E53E01](#) [E53E8C](#) [E5C4Q40J999FAC120](#) [E5CWLQ1TCAC100240](#) [E5GNQ03PFLKACDC24](#) [B300LKL21](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV-CN001](#) [OAS-160-N](#) [C40PEDRA](#) [K31S6](#) [K33-L1B](#) [K3MA-F](#) [100-240VAC](#) [K3TX-AD31A](#) [89750101](#) [L595020](#)
[SRM1-C02](#) [SRS2-1](#) [FT1A-C14SA-S](#) [G32X-V2K](#) [26546803](#) [26546805](#) [PWRA440A](#) [CPM1AETL03CH](#) [CV500SLK11](#) [3G2A5BI081](#)
[3G2A5IA122](#) [3G2A5LK010E](#) [3G2A5OA223](#)