

Electronic housing - UM -PROFIL - 2952020

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Panel mounting base, open, Lower part, Cross connection: without bus connector, color: green, width: 2000 mm, number of positions cross connector: not relevant, Note: profile length = PCB length - 3 mm (UM 25 and UM 45)
 Profile length = PCB length - 3.6 mm (UM_72, UM 100, UM_108)
 Profile length = PCB length - 9.5 mm (UM_122)

The figure shows the article with further components

Your advantages

- ✓ UM ...-SES lateral element offers options for labeling with Phoenix Contact marking material
- ✓ Fast mounting
- ✓ Inexpensive as a result of reducing the number of separate housing parts
- ✓ Flexible size and shape
- ✓ High degree of mechanical stability by screwing the lateral elements to the profile
- ✓ Cable fixing by means of UM ...-SEK lateral element (fixed using cable binders, not supplied as standard)
- ✓ The UMK-BF mounting flange enables modules to be mounted directly on the wall



Key Commercial Data

| | |
|--------------|------|
| Packing unit | 1 pc |
|--------------|------|

Configuration

| | |
|---------------------|--------------------|
| Profile PCB width | 72 mm [UM72] |
| Profile length [cm] | 20 |
| profile color | Jet black [BK9005] |

Technical data

General

| | |
|------------------|---------------------|
| Housing type | Panel mounting base |
| Housing material | PVC |
| Color (RAL) | green |

Ambient conditions

| | |
|---------------------------------|------------------|
| Ambient temperature (operation) | -15 °C ... 50 °C |
|---------------------------------|------------------|

Dimensions

Electronic housing - UM -PROFIL - 2952020

Technical data

Dimensions

| | |
|-------|----------|
| Width | 2000 mm |
| Depth | 127.5 mm |
| | 25 mm |
| | 45 mm |

Standards and Regulations


| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Environmental Product Compliance


| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings


Dimensional drawing

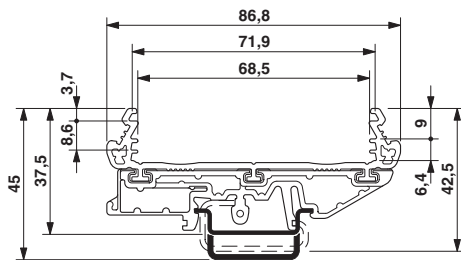


Dimensional drawing

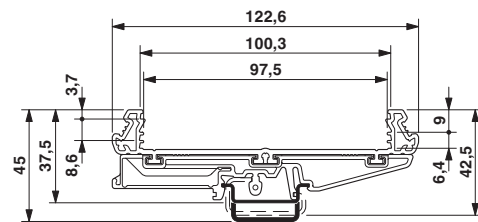


Dimensional drawing

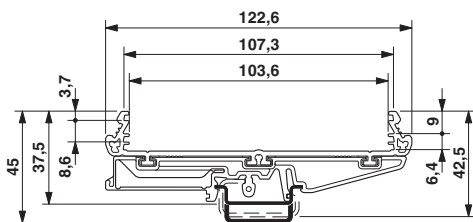

Dimensional drawing

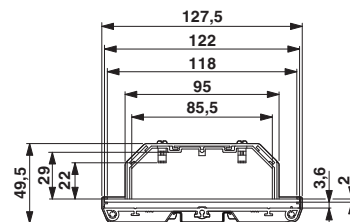

Dimensional drawing

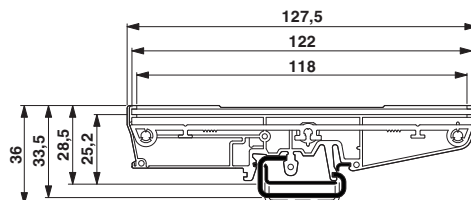

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Enclosures, Boxes & Cases](#) *category:*

Click to view products by [Phoenix Contact](#) *manufacturer:*

Other Similar products are found below :

[585-R-WH-PK](#) [M-10-PLATED](#) [60221-01](#) [60566-01-000](#) [HPL-9VB BATT DOOR](#) [M18-PLTD](#) [M-21-PLATED](#) [63310-01-000](#) [6711GSKT](#)
[71884-29-028](#) [LH45-100 Black](#) [72868-510-000](#) [CNS-0000 Black](#) [72883-510-000](#) [CNS-0101 Black](#) [72906-510-000](#) [CNS-0407 Black](#) [73092-](#)
[510-000](#) [CNM-0101 Black](#) [73105-510-000](#) [CNL-0101 Black](#) [73108-510-000](#) [CNL-0303 Black](#) [73395-510-039](#) [CNS-0006 Bone](#) [74257-510-000](#)
[CNL-0004](#) [MDC-1183-PLAIN-ALUM](#) [MDC-1183-PTD](#) [MDC-13104-PTD](#) [MDC-321-PTD](#) [MDC-973-PTD](#) [76](#) [77153-01-028](#) [FLX6030](#)
[83535-01-508](#) [90026-501-000](#) [PS36-200](#) [116-508](#) [120-407](#) [120-910](#) [127-908](#) [130-008](#) [1301170079](#) [1322GSKTEP](#) [1325GSKT3](#) [1434-1210](#)
[EAS-500 \(BLACK ANO\)](#) [1804RP-RB-PK](#) [190-005](#) [2202307](#) [KAB3321 BLACK](#) [KAB3421](#) [2697466](#) [S52213](#) [2901123](#) [2901699](#) [A0645271](#)
[A20P20](#) [2106-IR](#) [PERF-850-PLN](#)