

## Fuse plug - P-FU 6,3X32 LED 24-EX - 3046509

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Fuse plug, nominal current: 10 A, width: 8.2 mm, fuse type: G / 6,3 x 32, color: black

### Your advantages

- Large-surface labeling option
- Versions with bipolar error display
- Test contacts on both sides of the fuse
- Can be used for overload/short-circuit protection



### Key Commercial Data

Packing unit	10 pc
Minimum order quantity	50 pc
GTIN	 4 046356 919265
GTIN	4046356919265

### Technical data

#### General

Note	Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block.
Color	black
Insulating material	PA
Flammability rating according to UL 94	V0

#### Dimensions

Width	8.2 mm
Length	40 mm

#### General

Fuse	G / 6,3 x 32
Degree of pollution	3

# Fuse plug - P-FU 6,3X32 LED 24-EX - 3046509

## Technical data

### General

LED voltage range	12 V DC ... 30 V DC
LED current range	0.31 mA ... 0.95 mA
Maximum load current	10 A (the current is determined by the fuse used)
Nominal current $I_N$	10 A (the current is determined by the fuse used)

### Standards and Regulations


Flammability rating according to UL 94	V0
--	----

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Circuit diagram

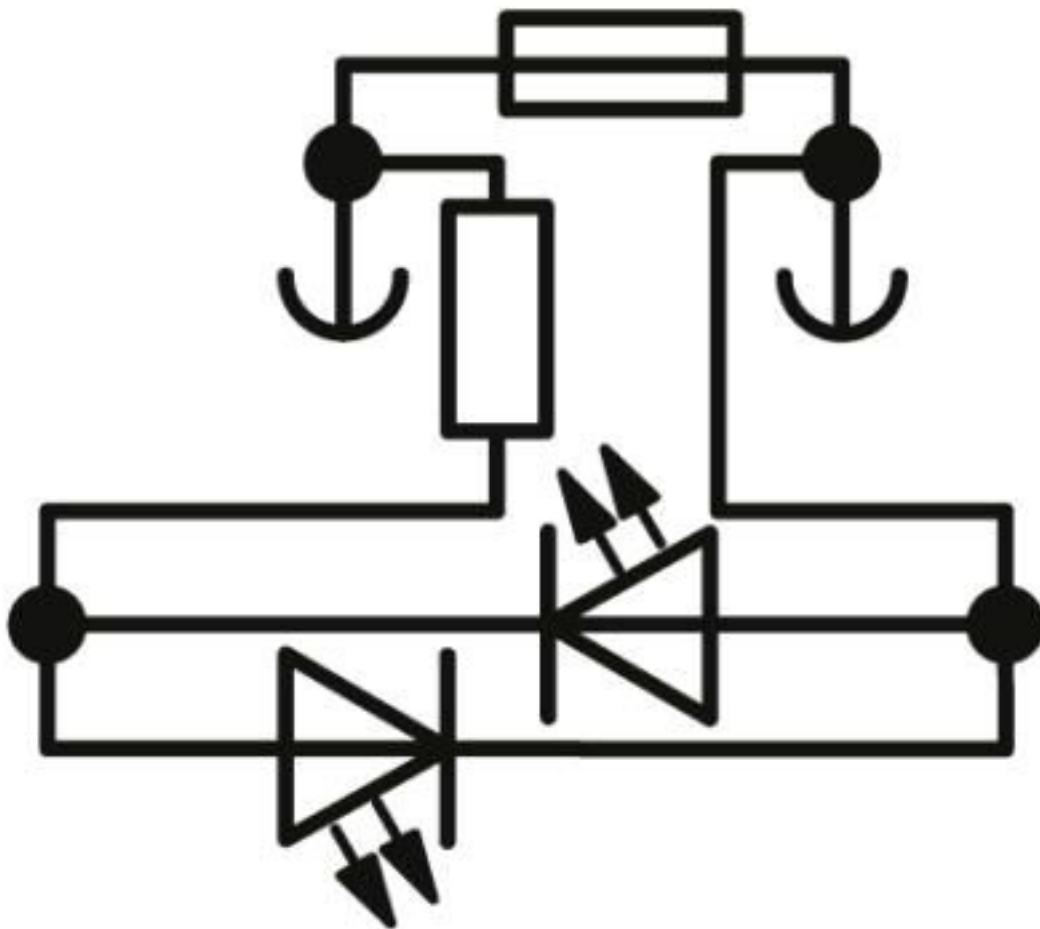

# Fuse plug - P-FU 6,3X32 LED 24-EX - 3046509

## Classifications

### eCl@ss

eCl@ss 10.0.1	27141149
eCl@ss 4.0	27141100
eCl@ss 4.1	27141100
eCl@ss 5.0	27141100
eCl@ss 5.1	27141100
eCl@ss 6.0	27141100
eCl@ss 7.0	27141149
eCl@ss 8.0	27141149
eCl@ss 9.0	27141149

### ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000899
ETIM 5.0	EC002018
ETIM 6.0	EC002018
ETIM 7.0	EC002018

### UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409
UNSPSC 18.0	39121409
UNSPSC 19.0	39121409
UNSPSC 20.0	39121409
UNSPSC 21.0	39121409

## Approvals

### Approvals

---

Approvals

EAC / CSA

---

Ex Approvals


UL Recognized / cUL Recognized / ATEX / cULus Recognized


---

### Approval details

## Fuse plug - P-FU 6,3X32 LED 24-EX - 3046509

### Approvals

EAC			RU C- DE.BL08.B.00714
-----	---	--	--------------------------

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	13631
-----	---	---	-------

Nominal voltage UN	300 V
Nominal current IN	10 A

Phoenix Contact 2020 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminal Block Tools & Accessories](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[00171430102](#) [00171420102](#) [600HL](#) [600RJ-07](#) [600RJ-11](#) [600RJ-14](#) [600RJS-10](#) [600RJS-12](#) [600RJS-15](#) [600RJS-21](#) [601RJ-09](#) [602SP](#) [602Z](#)  
[604J](#) [CSTSPC1-2](#) [7B941-7](#) [88943-2100](#) [QC102](#) [1437403-6](#) [1437403-9](#) [1437403-8](#) [1453128-1](#) [147832-1](#) [EC0037-000](#) [MT2/H--](#) [MT6/H-N](#)  
[MT6/V-GRND](#) [MT8/H-51-60](#) [BC2-12](#) [BCC-1-8/10](#) [EP2.5/4UN/BG](#) [1707755](#) [1735590](#) [1755480](#) [1789281](#) [1840227](#) [1840230](#) [2-1437402-1](#)  
[JA2-03](#) [JB1-03/J](#) [JB2-04](#) [JB2-05](#) [JB2-07](#) [JB2-09/J](#) [PARALLELJUMPERLINK](#) [JS601](#) [2204082](#) [2302463](#) [2305949](#) [8PCV-BUSHING](#)