

# IB IL 24 PSDI 8-PAC - Safety module



2985688

<https://www.phoenixcontact.com/gb/products/2985688>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety-related digital input module, IP20 protection, for the SafetyBridge, INTERBUS-Safety, and PROFIsafe system. The module has 4 safe digital inputs for two-channel assignment or 8 safe digital inputs for single-channel assignment.

## Product description

The safety module is an input module from the Inline product range designed for use at any point within a SafetyBridge, INTERBUS-Safety or PROFIsafe system. The transmission speed of the safety module can be set to 500 kBaud or 2 Mbaud using a switch. One transmission speed must be used consistently within a station. The module has four safe digital inputs for two-channel assignment or eight digital inputs for single-channel assignment.

## Your advantages

- SIL 3 according to IEC/EN 61508
- SIL 3 in accordance with EN IEC 62061
- PL e in accordance with EN ISO 13849-1

## Commercial data

Item number	2985688
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNA421
Product key	DNA421
Catalog page	Page 267 (C-6-2019)
GTIN	4046356131582
Weight per piece (including packing)	350.5 g
Weight per piece (excluding packing)	349.4 g
Customs tariff number	85389091
Country of origin	DE


# IB IL 24 PSDI 8-PAC - Safety module

2985688

<https://www.phoenixcontact.com/gb/products/2985688>

## Technical data

### Dimensions

Dimensional drawing	
Width	48.8 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

### Interfaces

#### Inline local bus

No. of channels	2
Connection method	Inline data jumper
Transmission speed	500 kbps / 2 Mbps (can be switched)

### System properties

#### Module

ID code (dec.)	163
ID code (hex)	A3
Length code (hex)	04
Length code (dec)	04
Process data channel	8 Byte
Input address area	8 Byte ((Operating mode: SafetyBridge))
Output address area	8 Byte ((Operating mode: SafetyBridge))
Register length	8 Byte
Required parameter data	1 Byte ((Operating mode: SafetyBridge))
Required configuration data	5 Byte ((Operating mode: SafetyBridge))

### Input data

#### Digital:

Input name	Digital inputs
Description of the input	IEC 61131-2 type 3
Number of inputs	4 (for 2-channel assignment) 8 (for 1-channel assignment)
Cable length	max. 200 m (200 m from the clock output to the safe input (total based on forward and return path))
Connection method	Spring-cage connection

# IB IL 24 PSDI 8-PAC - Safety module



2985688

<https://www.phoenixcontact.com/gb/products/2985688>

Connection technology	2-, 3-, 4-conductor
Input voltage	24 V DC (via clock outputs UT1 and UT2 or external supply)
Input voltage range	-3 V DC ... 30 V DC
Input voltage range "0" signal	-3 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Typical input current per channel	4.2 mA (at 24 V)
Typical response time	See technical data

## Product properties

Product type	I/O component
Product family	Inline
Application	Functional safety
Type	modular

## Electrical properties

Maximum power dissipation for nominal condition	24.12 W
Transmission medium	Copper

### Potentials: Communications power ( $U_L$ )

Supply voltage	7.5 V DC (see safety data)
Current draw	max. 180 mA

### Potentials: Main circuit supply ( $U_M$ )

Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Current draw	max. 825 mA (see safety data) typ. 25 mA (plus current consumption of the inputs when supplied via the clock outputs, plus current consumption of the connected initiators when via through the clock outputs)

### Supply: Module electronics

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC

### Electrical isolation/isolation of the voltage ranges

Test voltage: 5 V supply, incoming remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min.
Test voltage: 5 V supply, outgoing remote bus/7.5 V supply (bus logics)	500 V AC, 50 Hz, 1 min.
Test voltage: 7.5 V supply (bus logics)/24 V supply (I/O)	500 V AC, 50 Hz, 1 min.
Test voltage: 24 V supply (I/O) / functional ground	500 V AC, 50 Hz, 1 min.

## Connection data

### Connection technology

Connection name	Inline connector
pluggable	yes

# IB IL 24 PSDI 8-PAC - Safety module



2985688

<https://www.phoenixcontact.com/gb/products/2985688>

## Conductor connection

Connection method	Spring-cage connection
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 16

## Inline connector

Connection method	Spring-cage connection
Conductor cross section, rigid	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section, flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 16

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Degree of protection	IP20
Air pressure (operation)	80 kPa ... 108 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	66 kPa ... 108 kPa (up to 3500 m above sea level)
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	10 % ... 85 % (Take suitable measures against increased air humidity within the permitted temperature range.)
Permissible humidity (storage/transport)	10 % ... 85 % (Take suitable measures against increased air humidity within the permitted temperature range.)

## Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

## Mounting

Mounting type	DIN rail mounting
---------------	-------------------


# IB IL 24 PSDI 8-PAC - Safety module

2985688

<https://www.phoenixcontact.com/gb/products/2985688>


## Drawings

Dimensional drawing

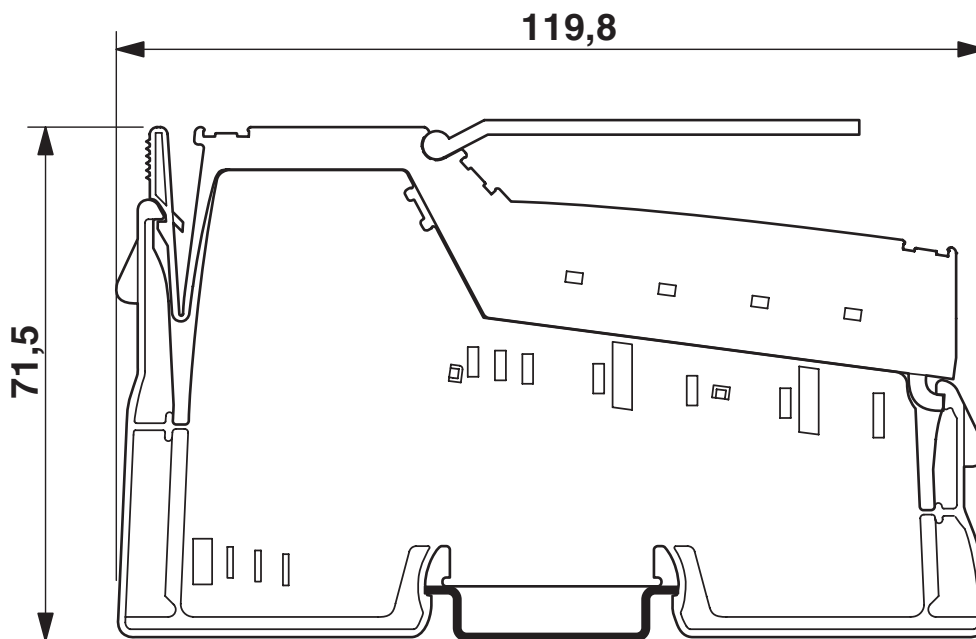

Dimensions (in mm)

Connection diagram

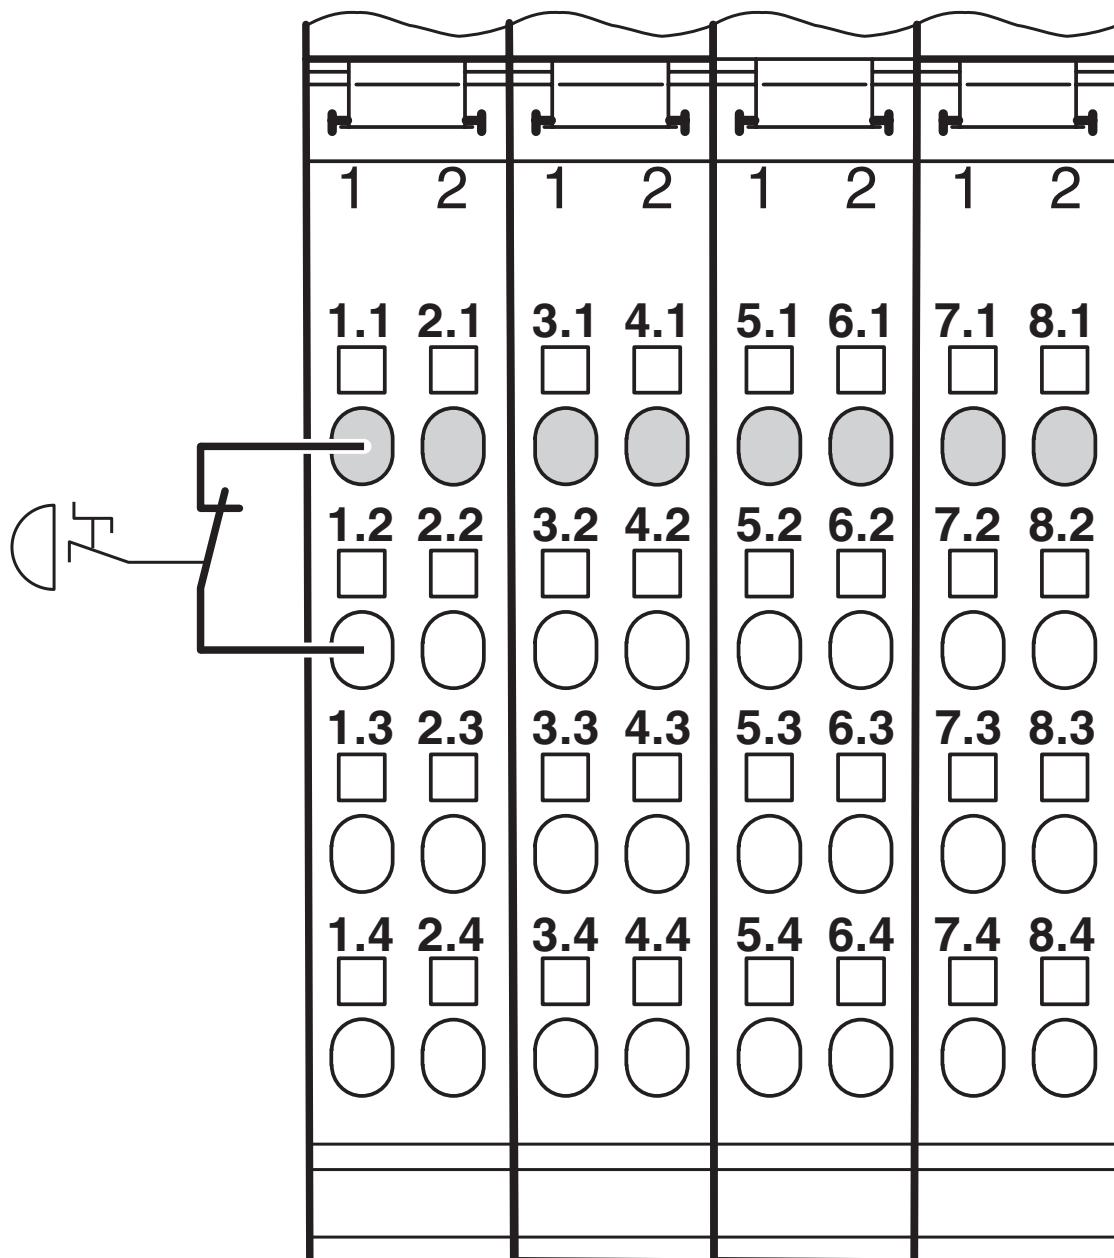

Connection example for an emergency stop circuit

# IB IL 24 PSDI 8-PAC - Safety module



2985688

<https://www.phoenixcontact.com/gb/products/2985688>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/2985688>



### UL Listed

Approval ID: FILE E 140324



### cUL Listed

Approval ID: FILE E 140324



### Functional Safety

Approval ID: 968/FSP 2449.00/22



### Functional Safety

Approval ID: 968/FSP 2449.00/22

### PROFIsafe

Approval ID: Z20079

### PROFIsafe

Approval ID: Z20206



### Functional Safety

Approval ID: 968/EZ 650.04/20



### Functional Safety

Approval ID: 968/EZ 650.04/20

### cULus Listed

# IB IL 24 PSDI 8-PAC - Safety module



2985688

<https://www.phoenixcontact.com/gb/products/2985688>

## Classifications

### ECLASS

ECLASS-11.0	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604

### ETIM

ETIM 9.0	EC001599
----------	----------

### UNSPSC

UNSPSC 21.0	32151600
-------------	----------



2985688

<https://www.phoenixcontact.com/gb/products/2985688>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	aa3b175d-1dc9-4105-81b3-1536a8212398

### EF3.0 Climate Change

CO2e kg	15.87 kg CO2e
---------	---------------

# IB IL 24 PSDI 8-PAC - Safety module

2985688

<https://www.phoenixcontact.com/gb/products/2985688>



## Accessories

### IB IL 24 SDI 8-PLSET/CP - Connector set

2916930

<https://www.phoenixcontact.com/gb/products/2916930>

Connector set (yellow), color coded, for safe SDI boards.



---

### IB IL FIELD 2 - Marking field

2727501

<https://www.phoenixcontact.com/gb/products/2727501>

Marking field, width: 12.2 mm



# IB IL 24 PSDI 8-PAC - Safety module

2985688

<https://www.phoenixcontact.com/gb/products/2985688>



## IB IL FIELD 8 - Marking field

2727515

<https://www.phoenixcontact.com/gb/products/2727515>

Marking field, width: 48.8 mm



---

## ESL 62X10 - Insert strip

0809492

<https://www.phoenixcontact.com/gb/products/0809492>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, CMS-P1-PLOTTER, mounting type: insert, lettering field size: 62 x 10 mm, Number of individual labels: 72



# IB IL 24 PSDI 8-PAC - Safety module

2985688

<https://www.phoenixcontact.com/gb/products/2985688>



## ESL 62X46 - Insert strip

0809502

<https://www.phoenixcontact.com/gb/products/0809502>

Insert strip, Sheet, white, unlabeled, can be labeled with: Office printing systems, CMS-P1-PLOTTER, mounting type: insert, lettering field size: 62 x 46 mm, Number of individual labels: 15



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd

Halesfield 13, Telford

Shropshire, TF7 4PG

01952 681700

[info@phoenixcontact.co.uk](mailto:info@phoenixcontact.co.uk)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Unspecified Connectors](#) category:*

*Click to view products by [Phoenix Contact](#) manufacturer:*

Other Similar products are found below :

[01.001.6353.0](#) [1-21107-1](#) [RAD-OUT-8D-REL](#) [1409899](#) [403000A10M050](#) [01.001.6253.0](#) [QUINT-PS/1AC/48DC/10](#) [1200110](#) [1200113](#)  
[LTWBD-06PMMP-LC7001](#) [LTWBU-10PMMP-LC7001](#) [153165](#) [RC-5AS2000](#) [RAD-900-CONF-RF1](#) [RAD-CON-SMA-N-SS](#) [CABLE-](#)  
[D37SUB/B/S/400/KONFE](#) [RAD-PIG-EF316-N-RSMA](#) [RAD-ISM-2400-ANT-VAN-3-0-R](#) [RIF-0-RPT-12DC/21](#) [RIF-1-BPT/2X21](#) [RIF-RH-1](#)  
[122.012-14](#) [138.014](#) [3040](#) [18-3/4](#) [GOL BLUE 19](#) [GOL BLUE 25](#) [800307](#) [5736861](#) [1714624](#) [5772605](#) [1016808](#) [RM12BPE-6PH\(76\)](#)  
[44429310](#) [E/UK](#) [LDP-12-24DC](#) [0000000080002400](#) [0250 02](#) [0250 03](#) [0250 04](#) [0250 05](#) [0250 06](#) [0250 07](#) [0250 08](#) [0251 02](#) [0251 03](#) [0251](#)  
[04](#) [0251 05](#) [0251 07](#) [0251 08](#) [0251 09](#)