


PCH 6/ 4+4-G1L4-7,62 BK - 1717137

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, nominal current: 41 A, rated voltage (III/2): 630 V, number of positions: 8, pitch: 7.62 mm, color: black, contact surface: Tin



Why buy this product

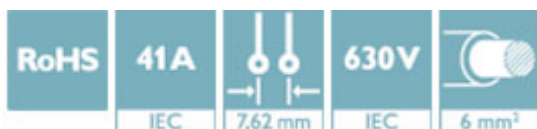

Key Commercial Data

Packing unit	25 STK
GTIN	
GTIN	4055626514987
Weight per Piece (excluding packing)	13.870 g
Custom tariff number	85366930
Country of origin	China

Technical data

Item properties

Number of positions	8
Pin layout	Linear pinning

Dimensions for the product

Length [l]	28.2 mm
Width [w]	47.25 mm
Height (without solder pin)	16.4 mm
Solder pin [P]	2.6 mm

Packaging information

Type of packaging	packed in cardboard
Pieces per package	25
Denomination packing units	Pcs.

PCH 6/ 4+4-G1L4-7,62 BK - 1717137

Technical data

Air clearances and creepage distances

Voltage	630 V
---------	-------

Classifications

eCl@ss

eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 5.0	EC002637
----------	----------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [phoenix contact manufacturer](#):

Other Similar products are found below :

[1203259](#) [3240366](#) [1893300](#) [1212619](#) [1927221](#) [1936102](#) [1730573](#) [3240367](#) [1014246](#) [1014236](#) [1014240](#) [1014290](#) [1014293](#) [1806193](#)
[1823655](#) [1912825](#) [1842254](#) [1768260](#) [1716373](#) [1648030](#) [1579051](#) [1014235](#) [1014239](#) [1014229](#) [1212378](#) [2800744](#) [2867076](#) [3006564](#)
[2800741](#) [5146480](#) [1582539](#) [1623633](#) [1507793](#) [3025587](#) [3069708](#) [1431461](#) [1586976](#) [0311647](#) [1460160](#) [1771338](#) [3048387](#) [2814605](#)
[0309086](#) [1513716](#) [3035684](#) [5451417](#) [0202219](#) [1647747](#) [1730667](#) [1709267](#)