




M23 HYBRID

SIGNAL DATA POWER TOGETHER AT LAST

Main Features

- Currents up to 30A.
- Voltages up to 850V DC & 630V AC.
- IP65/67 protection.
- Temperature range -40°C to +125°C.
- Contacts:
 - ❖ 4 x Signal.
 - ❖ 4 Data CAT5 (or signal).
 - ❖ 4 Power + PE.

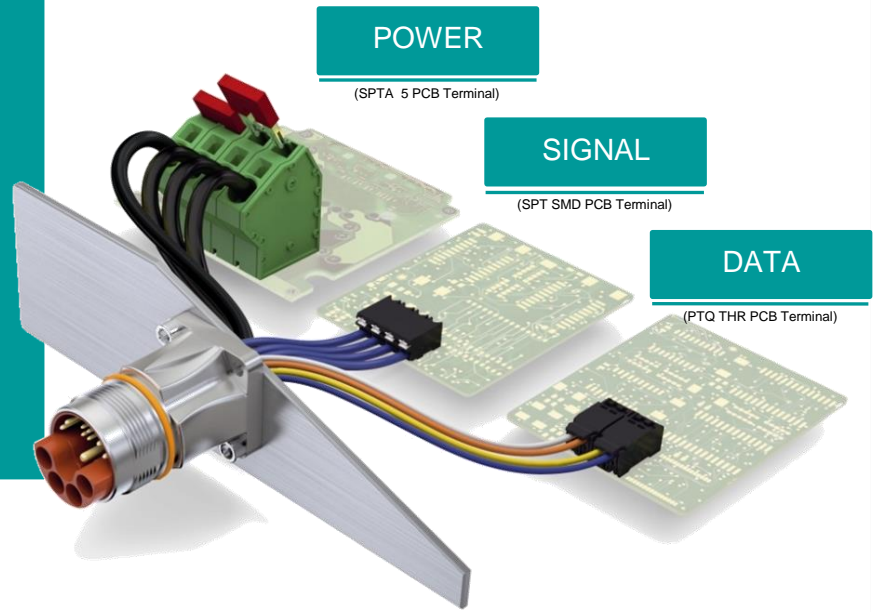

HYBRID CABLE

Designed to simplify connector assembly



4 SIGNAL

8A, 50V



CONTACTS

0.8, 1.0 & 2.0 mm Dia

PRODUCT PORTFOLIO

Cable, Coupling, Device & Over-moulded Connectors



4 DATA CAT5


Optional 4x signal insert (unshielded)

4 POWER + PE

30A, 850V DC / 630V AC

STD CRIMP TOOL

0.06-2.5mm² SF-Z0054
4.0mm² SF-Z0025


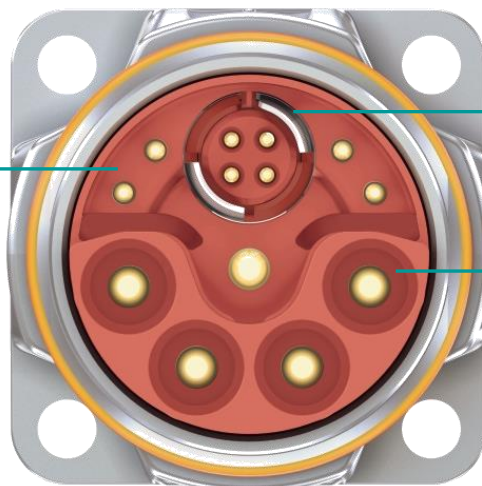


M23



Customer Advantages

- Signal, data and power in one circular connector.
- Compact M23 connector for high power applications.
- Space saving on the device and in the cable tray.
- Improved ergonomics for hand held devices.
- 0.8mm data contact for safe & reliable data transmission according to CAT5.
- SPEEDCON fast connection technology.
- Over-moulded cable assemblies available on request.
- Reduced system cabling (see illustration below).

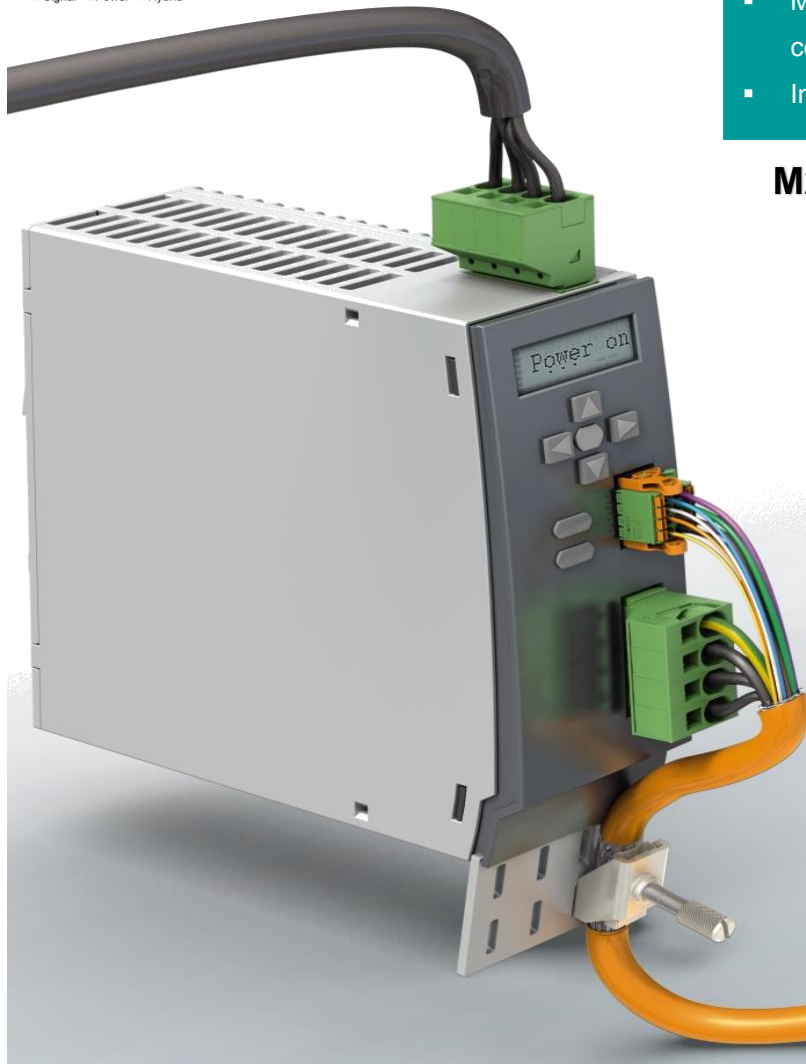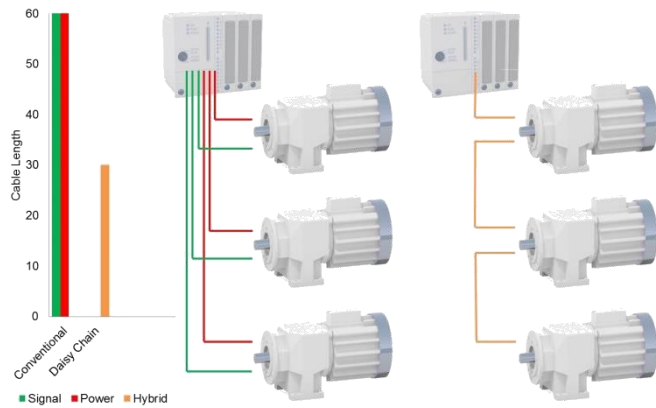

APPLICATIONS

M23 Hybrid offers a world of possibilities for device connectivity



MOTOR

Daisy Chain Connectivity



MONITOR

Simplified Installation



HAND TOOL

Ergonomic Design



ASSEMBLY

Reduced Cabling

Industry Trends

- EU regulation requires manufacturers to improve electric motor efficiency.
- Miniaturisation results in less space for device connectors.
- Intelligent devices require power, signal & data.

**M23 HYBRID offers new possibilities
in device connectivity**



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [phoenix contact manufacturer](#):

Other Similar products are found below :

[1203259](#) [3240366](#) [1893300](#) [1623633](#) [2814605](#) [3240098](#) [0201391](#) [CRIMPFOX 16 S](#) [CRIMPSET 25](#) [7001438](#) [ETD-BL-1T-F-300S](#) [MCR-1CLP-I-I-00](#) [MCR-4CLP-I-I-00](#) [MCR-DAC 8-I- 4-BUS](#) [FL EPA WMS](#) [FLK 50/EZ-DR/ 400/KONFEK/S](#) [FLS PB M12 DO 8 M12-2A](#) [PPS CD BLADE](#) [PSI-MOS-DNET CAN/FO 660/BM](#) [PSM-ME-RS232/RS232-P](#) [PSM PTK-4](#) [PSM-SET-FSMA/4-KT](#) [PSR-SCP-24DC/TS/SDI8/SDIO](#) [PSR-SCP- 24DC/URD3/4X1/2X2](#) [PT 2X2- 5DC-ST](#) [1202580](#) [1203534](#) [1205985](#) [1206308](#) [1207420](#) [1209091](#) [QUINT-BAT/24DC/12AH](#) [1204038](#) [1212041](#) [1212096](#) [1212162](#) [1212171](#) [1212202](#) [1212250](#) [1212304](#) [1212380](#) [1212480](#) [1212485](#) [1212488](#) [1212500](#) [1212511](#) [1212578](#) [1212584](#) [1212585](#) [1212592](#)