


惠州金力电机有限公司
KINGLY MOTOR CO., LTD
样品确认书

SAMPLE CONFIRMATION

Page 页码: 1/2

Model	JL-12FN20-50-06420	Rated Voltage	6V	NO.	XG-2014111401	Date:	2014.11.18
-------	--------------------	---------------	----	-----	---------------	-------	------------

外形图 Dimension

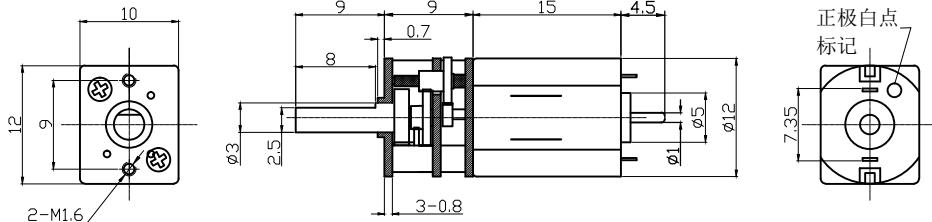

1. Standard Operating Conditions 正常使用条件

- 1.1 Operating Voltage: DC 3~7V (constant between motor terminals)
电压使用范围: (马达接线终端之稳定电压)
- 1.2 Operating Condition Temperature Range : -0~+40° C
使用环境温度范围:
- 1.3 Direction of Rotation: CW or CCW
旋转方向:
Positive pole connect Red "+"端子.
Negative pole connect "-"端子
Facing the output shaft axis

2. Measuring Conditions 测量条件

- 2.1 Rated Voltage: DC 6V
额定电压:
- 2.2 Environment Temperature: 25° C
测试环境温度:
- 2.3 Environment Humidity: 50%
测试环境湿度:
- 2.4 Position of Motor:
设置方向:
The tested sample is set level 电机出力轴水平放置

3. Electrical characteristics (Test after running 30 seconds)

电器特性 (电机通电30秒后测试)

Mapper 制作		Assessor 审核		Approved 核准	
--------------	--	----------------	--	----------------	--

样品确认书

SAMPLE CONFIRMATION

Page 页码: 2/2

Model	JL-12FN20-50-06420	Rated Voltage	6V	NO.	XG-2014111401	Edition	A/0
-------	--------------------	---------------	----	-----	---------------	---------	-----

- 3.1 No-load:
空载特性:
3.1.1 No-load speed:
无负载转速: 420±10% rpm
3.1.2 No-load current:
无负载电流: 0.08A (0.16A max)
3.2 Rated-load:
负载特性:
3.2.1 Rated-load torque:
负载转矩: 0.1kg. cm
3.2.2 Rated-load current:
负载电流: 0.18A (0.27A max)
3.2.3 Rated-load Speed:
负载转速: 355±10% rpm
3.2.4 Stall current:
堵转电流: 0.77A
3.2.5 Stall torque:
堵转力矩: 0.5kg. cm (参考值)

4. Mechanical characteristics 机械特性

- 4.1 Configuration: As specified in outline drawing
外观: 依图示规格
4.2 Axial play of shaft:
轴向间隙: ≤0.3mm
4.3 Weight:
重量:
4.4 Mechanical Noise: To be set up with mutual consent
机械噪音: 设定双方均能接受之标准
4.5 Mechanical Vibration: To be set up with mutual consent
机械震动: 设定双方均能接受之标准

5. Motor features 电机特性

- 5.1 No-load Current:
空载电流: 0.07A
5.2 No-load Speed:
空载转速: 21500±10% rpm

6. Life test 寿命试验

- Test conditions 测试条件
6.1 Rated load:
额定负载:
6.2 Environment: (Nomal circumstances)
环境: (常规情况) 21° C ±5° C / 65%±20%RH
6.3 Test mode: A. Rated-load continuous operation
试验模式: A. 额定负载连续运转
B. Running 5s stop 5s
B. 运行5秒停5秒

Client Confirms :

客户确认

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Motor/Motion/Ignition Controllers & Drivers category:

Click to view products by Pimoroni manufacturer:

Other Similar products are found below :

[FSB50550TB2](#) [FSBF15CH60BTH](#) [MSVCPM2-63-12](#) [MSVGW45-14-2](#) [MSVGW54-14-3](#) [MSVGW54-14-5](#) [NTE7043](#) [LA6565VR-TLM-E](#)
[LB11650-E](#) [LB1837M-TLM-E](#) [LB1845DAZ-XE](#) [LC898300XA-MH](#) [SS30-TE-L-E](#) [26700](#) [LV8281VR-TLM-H](#) [BA5839FP-E2](#) [IRAM236-](#)
[1067A](#) [LA6584JA-AH](#) [LB11847L-E](#) [NCV70501DW002R2G](#) [AH293-PL-B](#) [TND315S-TL-2H](#) [FNA23060](#) [FSB50250AB](#) [FNA41060](#)
[MSVB54](#) [MSVBTM50E](#) [MSVCPM3-54-12](#) [MSVCPM3-63-12](#) [MSVCPM4-63-12](#) [MSVTA120](#) [FSB50550AB](#) [NCV70501DW002G](#)
[LC898301XA-MH](#) [LV8413GP-TE-L-E](#) [MSVGW45-14-3](#) [MSVGW45-14-4](#) [MSVGW45-14-5](#) [MSVGW54-14-4](#) [STK984-091A-E](#)
[SLA7026M](#) [MP6519GQ-Z](#) [LB11651-E](#) [IRSM515-025DA4](#) [LV8127T-TLM-H](#) [MC33812EKR2](#) [NCP81382MNTXG](#) [TDA21801](#)
[LB11851FA-BH](#) [NCV70627DQ001R2G](#)