




Features

- Low saturation voltage

SOT-89



1. Base 2. Collector 3. Emitter

Marking: 1132P
1132Q
1132R

Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Collector Base Voltage	-V _{CBO}	40	V
Collector Emitter Voltage	-V _{CEO}	32	V
Emitter Base Voltage	-V _{EBO}	5	V
Collector Current	-I _C	1	A
Pulsed Collector Current	-I _{CP}	2	A
Power Dissipation	P _D	500	mW
Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{STG}	-55 to 150	°C









Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at V _{CE} = 2 V, I _C = 500 mA Current Gain Group	H _{FE}	82	-	180	-
		120	-	270	-
		180	-	390	-
Collector Base Cutoff Current at -V _{CB} = 20 V	-I _{CBO}	-	-	0.5	μA
Emitter Base Cutoff Current at -V _{EB} = 4 V	-I _{EBO}	-	-	0.5	μA
Collector Base Breakdown Voltage at -I _C = 50 μA	-V _{(BR)CBO}	40	-	-	V
Collector Emitter Breakdown Voltage at -I _C = 1 mA	-V _{(BR)CEO}	32	-	-	V
Emitter Base Breakdown Voltage at -I _E = 50 μA	-V _{(BR)EBO}	5	-	-	V
Collector Emitter Saturation Voltage at -I _C = 500 mA, -I _B = 50 mA	-V _{CE(sat)}	-	0.2	0.5	V
Transition Frequency at -V _{CE} = 5 V, -I _C = 50 mA, f=30MHz	f _T	-	150	-	MHz
Collector Output Capacitance at -V _{CB} = 10 V, I _E = 0, f = 1MHz	C _{ob}	-	20	30	pF



2SB1132SQ PNP Transistor

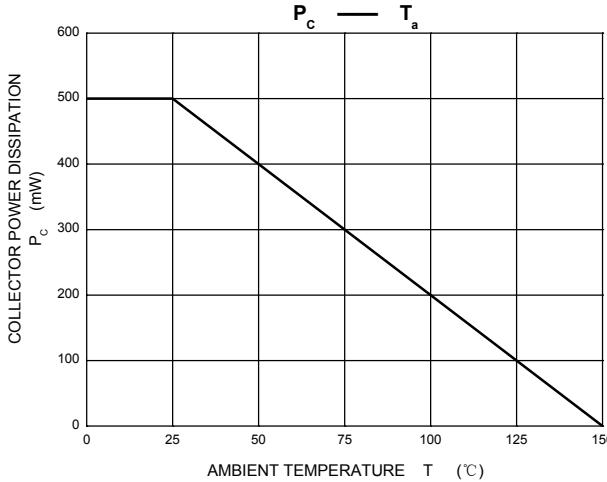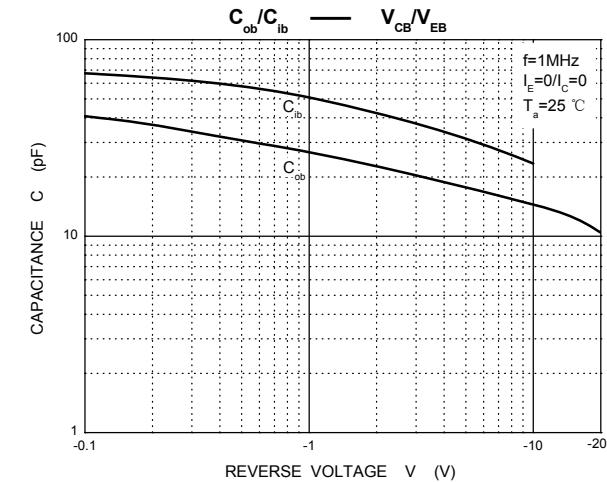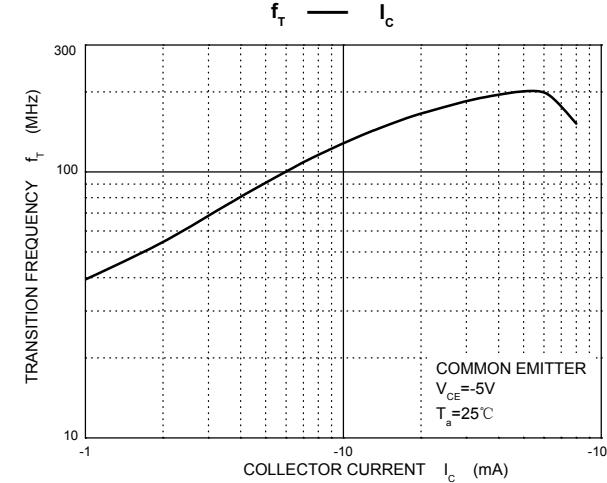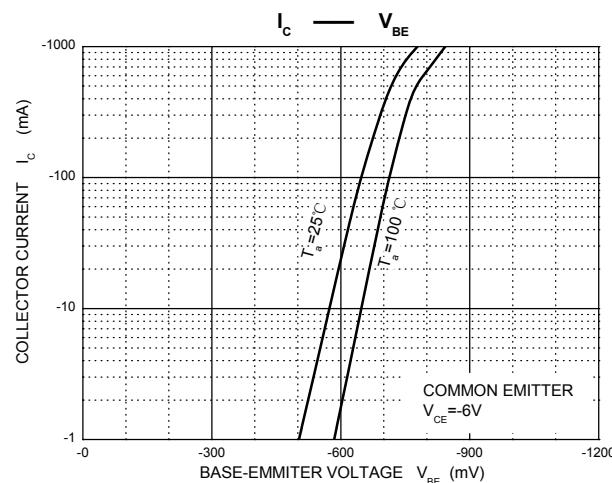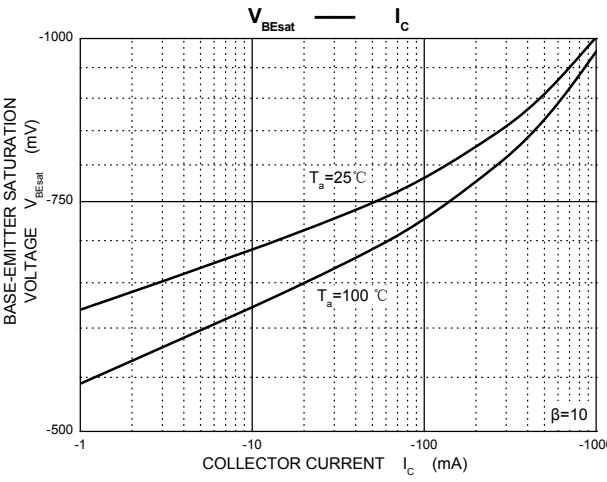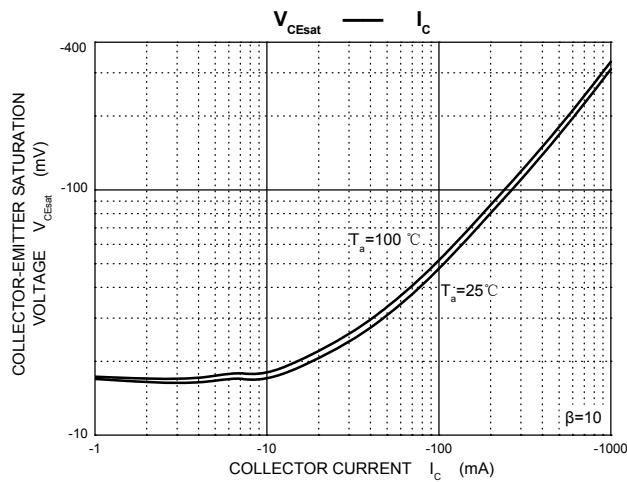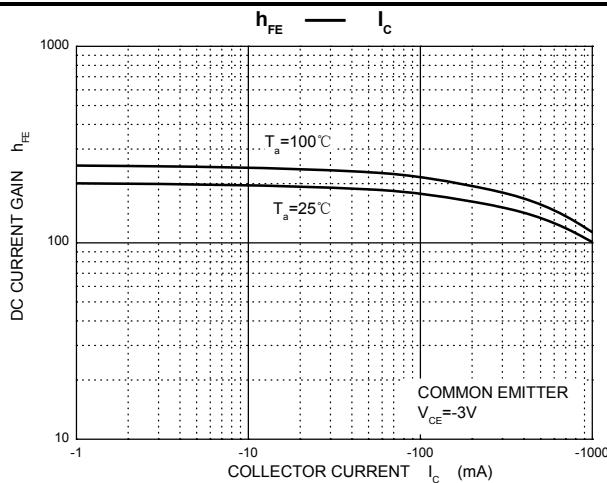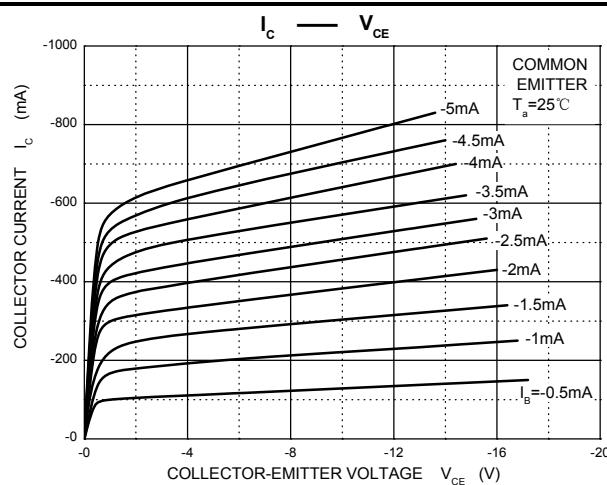




Package Outline

SOT-89

Dimensions in mm

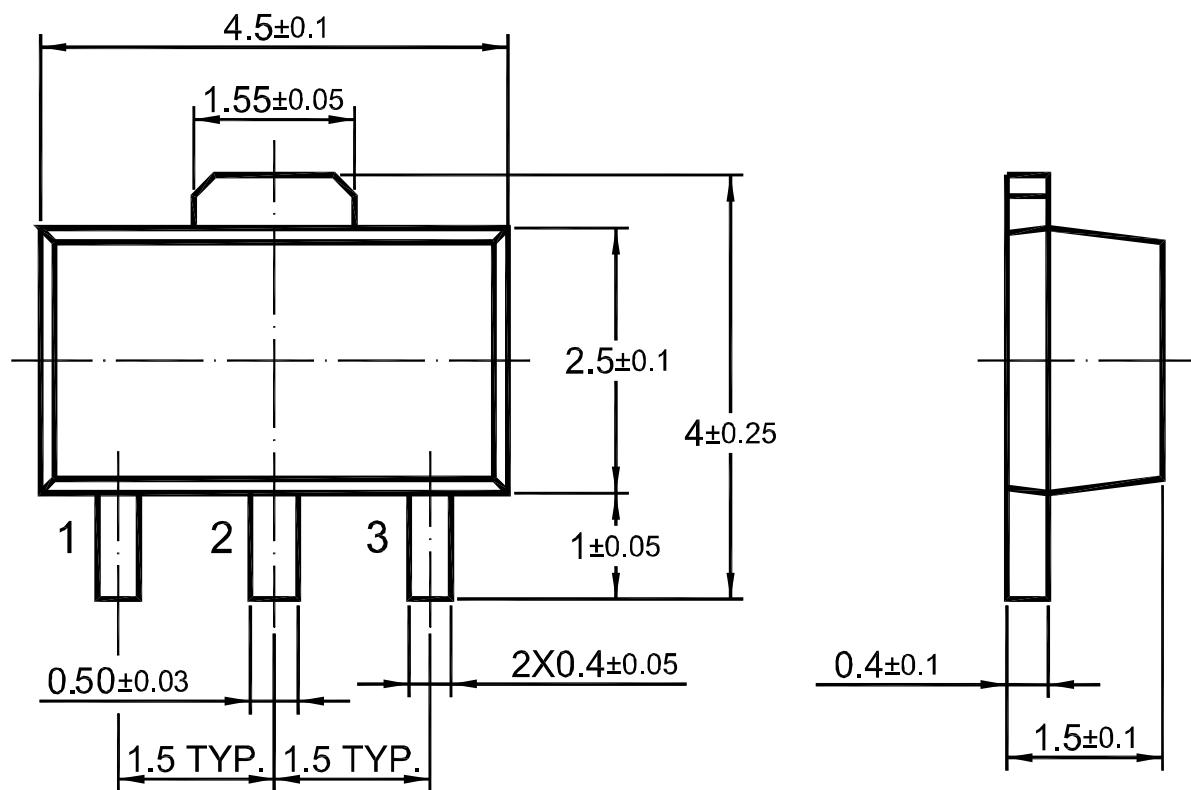

Ordering information

Device	Package	Shipping
2SB1132SQ	SOT-89	1000/Tape&Reel(7inches)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Pingjingsemi manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)