


# BCV27 BCV47 NPN Darlington Transistor


## Features

- High Collector Current
- High Current Gain

## Equivalent Circuit



## SOT-23



1.Base 2.Emitter 3.Collector

## Marking Code:

BCV27 : FF

BCV47 : FH

## Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.


Parameter	Symbol	Value	Unit
Collector Base Voltage	BCV27	40	V
	BCV47	80	
Collector Emitter Voltage	BCV27	30	V
	BCV47	60	
Emitter Base Voltage	$V_{EBO}$	10	V
Collector Current	$I_C$	500	mA
Peak Collector Current	$I_{CM}$	800	mA
Base Current	$I_B$	100	mA
Maximum Power Dissipation	$P_D$	200	mW
Junction Temperature	$T_J$	150	°C
Storage Temperature Range	$T_{STG}$	-65 to +150	°C










**Electrical Characteristics**


Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain					
at $V_{CE} = 5\text{ V}$ , $I_C = 1\text{ mA}$	BCV27	4000	--	--	
	BCV47	2000	--	--	
at $V_{CE} = 5\text{ V}$ , $I_C = 10\text{ mA}$	BCV27	10000	--	--	--
	BCV47	4000	--	--	
at $V_{CE} = 5\text{ V}$ , $I_C = 100\text{ mA}$	BCV27	20000	--	--	
	BCV47	10000	--	--	
Collector Base Cutoff Current					
at $V_{CB} = 30\text{ V}$	BCV27	--	--	100	nA
at $V_{CB} = 60\text{ V}$	BCV47	--	--	100	
Emitter Base Cutoff Current					
at $V_{EB} = 10\text{ V}$		--	--	100	nA
Collector Base Breakdown Voltage					
at $I_C = 100\text{ }\mu\text{A}$	BCV27	40	--	--	V
	BCV47	80	--	--	
Collector Emitter Breakdown Voltage					
at $I_C = 10\text{ mA}$	BCV27	30	--	--	V
	BCV47	60	--	--	
Emitter Base Breakdown Voltage					
at $I_E = 10\text{ }\mu\text{A}$		10	--	--	V
Collector Emitter Saturation Voltage					
at $I_C = 100\text{ mA}$ , $I_B = 0.1\text{ mA}$		--	--	1	V
Base Emitter Saturation Voltage					
at $I_C = 100\text{ mA}$ , $I_B = 0.1\text{ mA}$		--	--	1.5	V
Base Emitter On Voltage					
at $V_{CE} = 5\text{ V}$ , $I_C = 10\text{ mA}$		--	--	1.4	V
Transition Frequency					
at $V_{CE} = 5\text{ V}$ , $I_C = 30\text{ mA}$ , $f = 100\text{ MHz}$	$F_T$	--	220	--	MHz



**Typical Characteristic Curves**

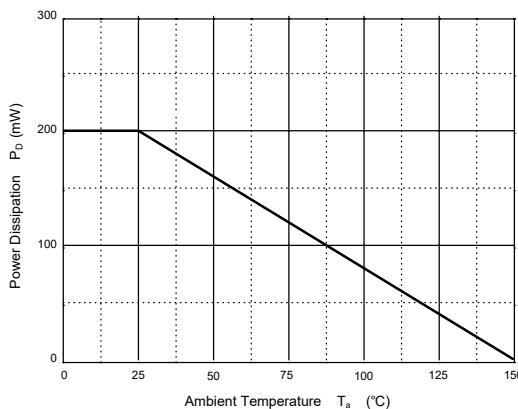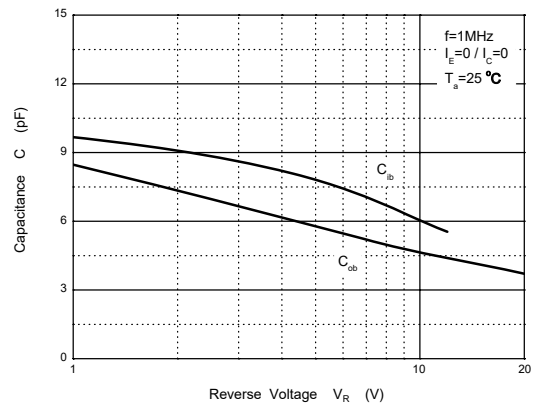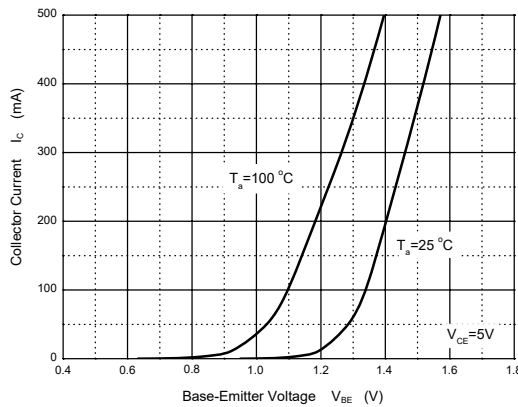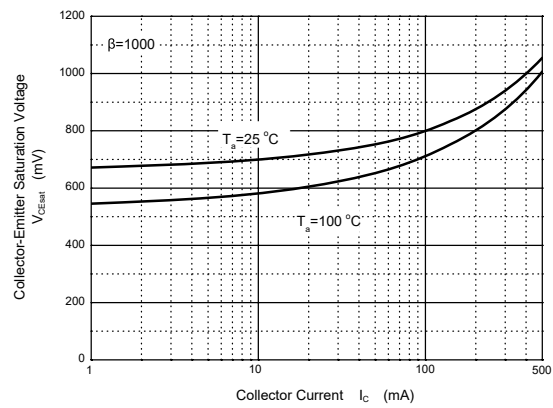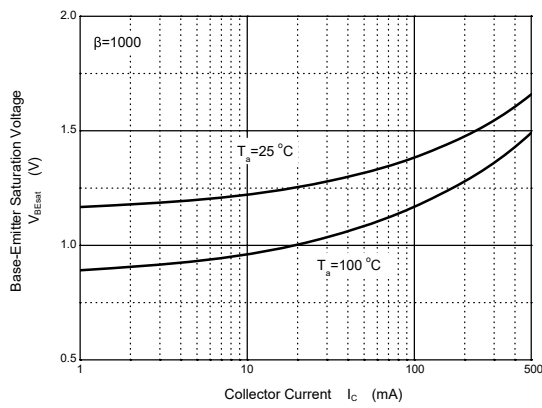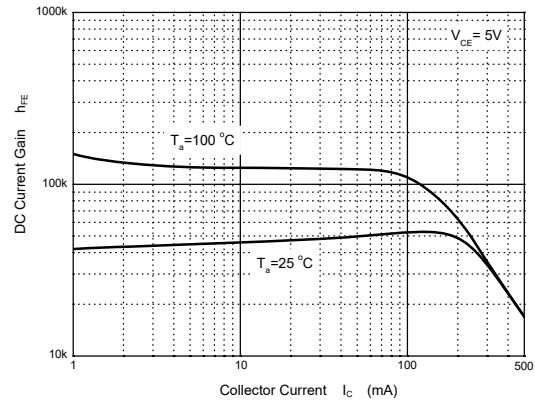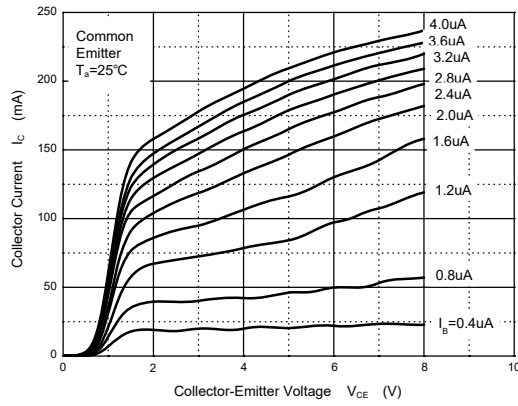







**BCV27**  
**BCV47**

**NPN Darlington Transistor**

### Package Outline

SOT-23


Dimensions in mm

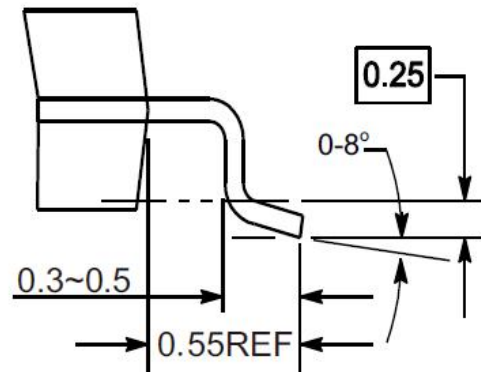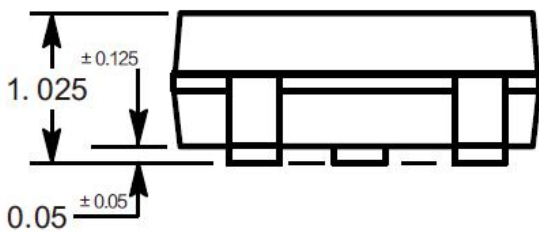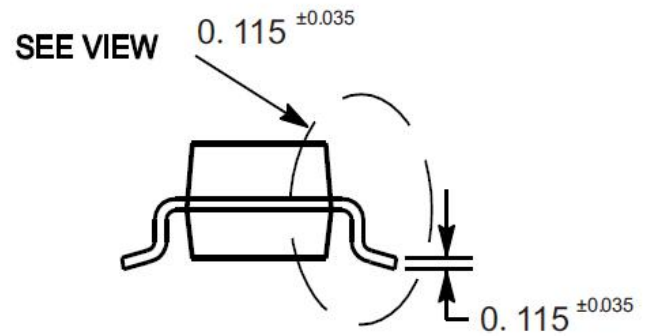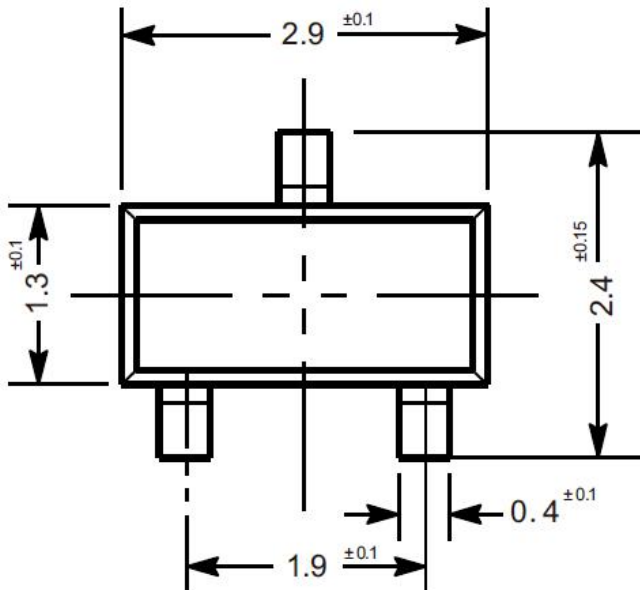

**VIEW C**


### Ordering Information

Device	Package	Shipping
BCV27,BCV47	SOT-23	3,000PCS/Reel&7inches



## Conditions of Soldering and Storage

### ◆ Recommended condition of reflow soldering

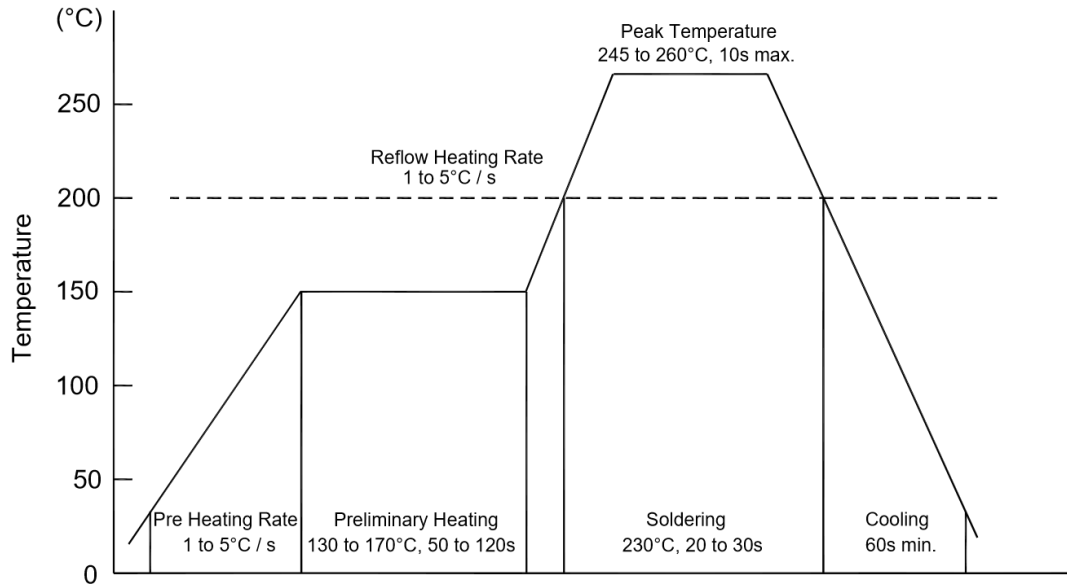

Recommended peak temperature is over 245 °C. If peak temperature is below 245 °C, you may adjust the following parameters:


- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

### ◆ Conditions of hand soldering

- Temperature: 370 °C
- Time: 3s max.
- Times: one time


### ◆ Storage conditions

- **Temperature**  
5 to 40 °C
- **Humidity**  
30 to 80% RH
- **Recommended period**  
One year after manufacturing




**Package Specifications**

- The method of packaging

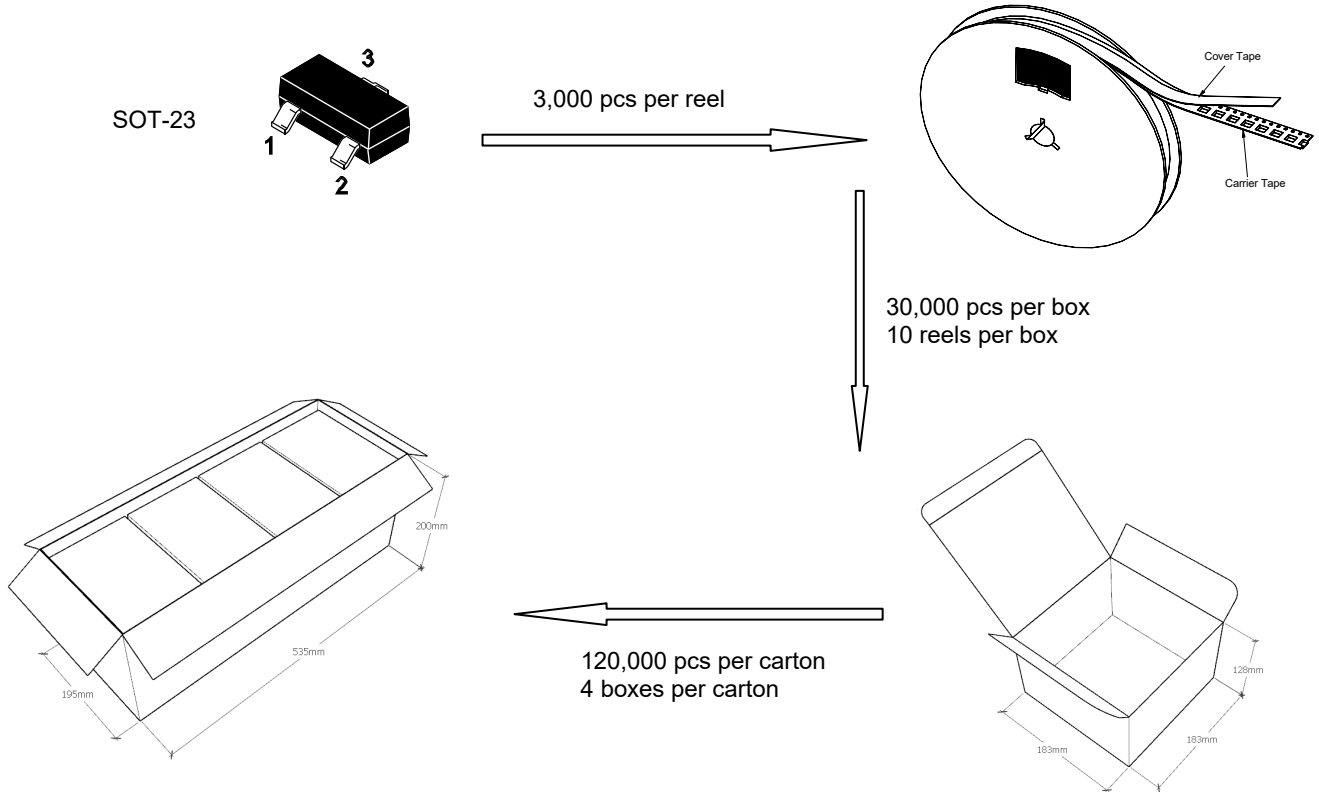


◆ **Embossed tape and reel data**

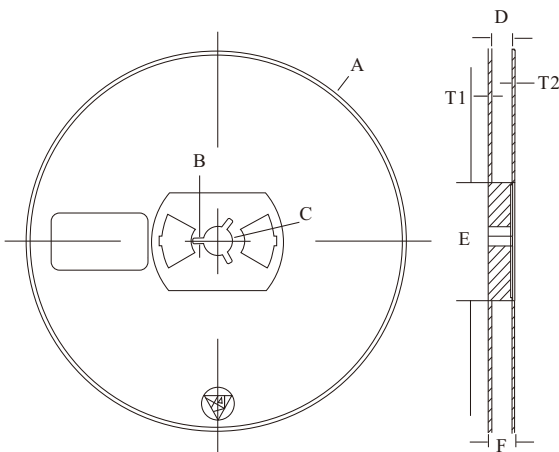

Symbol	Value (unit: mm)
A	Ø 177.8±1
B	2.7±0.2
C	Ø 13.5±0.2
E	Ø 54.5±0.2
F	12.3±0.3
D	9.6+2/-0.3
T1	1.0±0.2
T2	1.2±0.2

**Reel (7")**

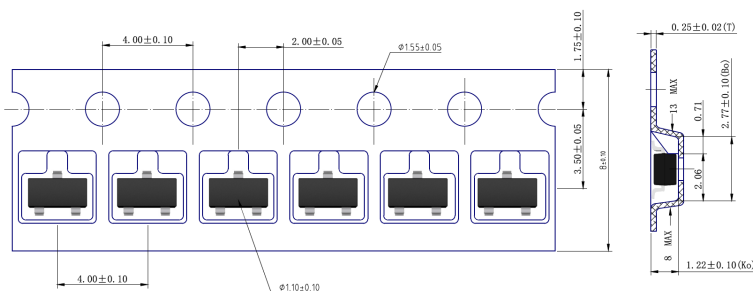

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Darlington Transistors](#) category:*

*Click to view products by [Pingjingsemi](#) manufacturer:*

Other Similar products are found below :

[281287X](#) [BDV64B](#) [SBSP52T1G](#) [Jantx2N6058](#) [LB1205-L-E](#) [2N6053](#) [MPSA63](#) [2N6667](#) [NTE256](#) [TIP120](#) [MJ11028](#) [TIP140](#) [Jantx2N6352](#)  
[TIP127L-BP](#) [2N6383](#) [ULN2803](#) [ULN2003ALM/TR](#) [ULN2803ADM/TR](#) [HT62783ARWZ](#) [ULN2803](#) [ULN2003A](#) [ULN2003](#)  
[SSTA28MGT116](#) [TM2803L](#) [Aip2003SA16.TR](#) [SAP2003SCTR](#) [AiP2003LSA.TR](#) [BCV27](#) [MMBTA14](#) [MMBTA14](#) [ULN2803](#) [2SB1560](#)  
[2SB852KT146B](#) [2SD2560](#) [TIP112TU](#) [BCV27](#) [MMBTA13-TP](#) [MMBTA14-TP](#) [MMSTA28T146](#) [BSP50H6327XTSA1](#) [NTE2557](#)  
[NJVNJD35N04T4G](#) [CP527-2N6299-CT5](#) [CP127-2N6301-CT5](#) [MPSA29-D26Z](#) [FJB102TM](#) [FMMT38C](#) [BCV29](#) [BCV47](#) [FMMT734](#)