


### Descriptions

The ESDU...ADB series of TVS are designed to protect sensitive electronics from damage or latch-up due to ESD and other voltage-induced transient events. They are available with operating voltages of 3.3V, 5V, 12V. They are unidirectional device and may be used on lines where the signal polarities are above ground.

TVS diodes are solid-state devices designed specifically for transient suppression. They feature large cross-sectional area junctions for conducting high transient currents. They offer desirable characteristics for board level protection including fast response time, low operating and clamping voltage and no device degradation.

They are available in DFN1x0.6-2L package. Standard products are Pb-free and Halogen-free. They are particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

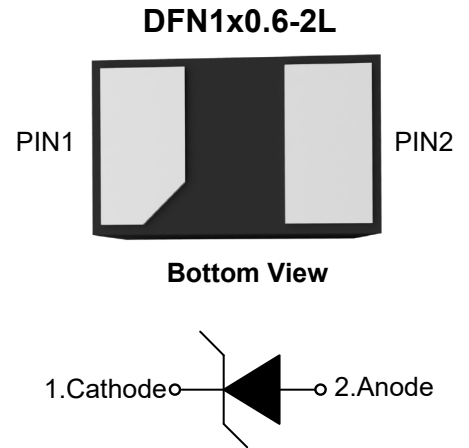

### Features

- Uni-directional ESD Protection of one line
- Working voltage: 3.3V, 5.0V, 12V
- Transient protection for each line according to IEC61000-4-2 (ESD): ±8kV (contact discharge)
- Low reverse clamping voltage
- Low leakage current

### Applications

- Cell phone handsets and accessories
- Audio and video equipment
- Portable Electronics
- ther electronics equipments communication systems

### Marking Code



**Top View**


Device	ESDU3V3ADB	ESDU5V0ADB	ESDU12VADB
Marking Code	33A	50A	12A

### Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ )

Parameter		Symbols	Value	Unit
IEC61000-4-2 ESD Voltage	Air Model	$V_{ESD}$	$\pm 15$	KV
	Contact Model		$\pm 8$	
Junction Temperature		$T_J$	125	$^\circ\text{C}$
Storage Temperature Range		$T_{STG}$	-45 to +125	$^\circ\text{C}$

### Electrical Parameter

Symbol	Parameter
$V_C$	Clamping Voltage @ $I_{PP}$
$I_{PP}$	Peak Pulse Current
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{RWM}$	Reverse Standoff Voltage
$V_F$	Forward Voltage @ $I_F$
$I_F$	Forward Current

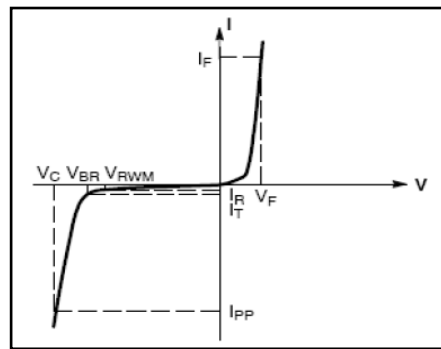

V-I characteristics for a uni-directional TVS

### Electrical Characteristics ( $T_A=25^\circ\text{C}$ )

ESDU3V3ADB					
Parameter	Symbols	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	$V_{RWM}$	--	--	3.3	V
Reverse Leakage Current at $V_{RWM} = 3.3\text{ V}$	$I_R$	--	--	0.5	$\mu\text{A}$
Forward Voltage at $I_F = 10\text{ mA}$	$V_F$	--	0.79	1.1	V
Breakdown Voltage at $I_T = 1\text{ mA}$	$V_{R(BR)}$	5	--	6.2	V
Peak Pulse Power Dissipation $t_p = 8/20\mu\text{s}$	$P_{PP}$	--	--	240	W
Peak Pulse Current $t_p = 8/20\mu\text{s}$	$I_{PP}$	--	--	12	A
Clamping Voltage at $I_{PP} = 3\text{ A}$ , $t_p = 8/20\mu\text{s}$ at $I_{PP} = 12\text{ A}$ , $t_p = 8/20\mu\text{s}$	$V_C$	--	7 15	10 20	V
Junction Capacitance at $V_R = 0\text{ V}$ , $f = 1\text{ MHz}$	$C_J$	--	120	--	pF




<b>ESDU5V0ADB</b>					
<b>Parameter</b>	<b>Symbols</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
Reverse stand-off voltage	$V_{RWM}$	--	--	5	V
Reverse Leakage Current at $V_{RWM} = 5$ V	$I_R$	--	--	0.5	$\mu$ A
Forward Voltage at $I_F = 10$ mA	$V_F$	--	0.79	1.1	V
Breakdown Voltage at $I_T = 5$ mA	$V_{R(BR)}$	6	--	7.5	V
Peak Pulse Power Dissipation $t_p = 8/20\mu$ s	$P_{PP}$	--	--	250	W
Peak Pulse Current $t_p = 8/20\mu$ s	$I_{PP}$	--	--	10	A
Clamping Voltage at $I_{PP} = 3$ A, $t_p = 8/20\mu$ s at $I_{PP} = 10$ A, $t_p = 8/20\mu$ s	$V_C$	-- --	8.8 17	12 25	V
Junction Capacitance at $V_R = 0$ V, $f = 1$ MHz	$C_J$	--	100	150	pF


<b>ESDU12VADB</b>					
<b>Parameter</b>	<b>Symbols</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Unit</b>
Reverse stand-off voltage	$V_{RWM}$	--	--	12	V
Reverse Leakage Current at $V_{RWM} = 12$ V	$I_R$	--	--	0.1	$\mu$ A
Forward Voltage at $I_F = 10$ mA	$V_F$	--	0.79	1.1	V
Breakdown Voltage at $I_T = 1$ mA	$V_{R(BR)}$	13.5	--	16.5	V
Peak Pulse Power Dissipation $t_p = 8/20\mu$ s	$P_{PP}$	--	--	500	W
Peak Pulse Current $t_p = 8/20\mu$ s	$I_{PP}$	--	--	10	A
Clamping Voltage at $I_{PP} = 3$ A, $t_p = 8/20\mu$ s at $I_{PP} = 10$ A, $t_p = 8/20\mu$ s	$V_C$	-- --	17 45	20 50	V
Junction Capacitance at $V_R = 0$ V, $f = 1$ MHz	$C_J$	--	45	--	pF



### Typical Characteristic Curves




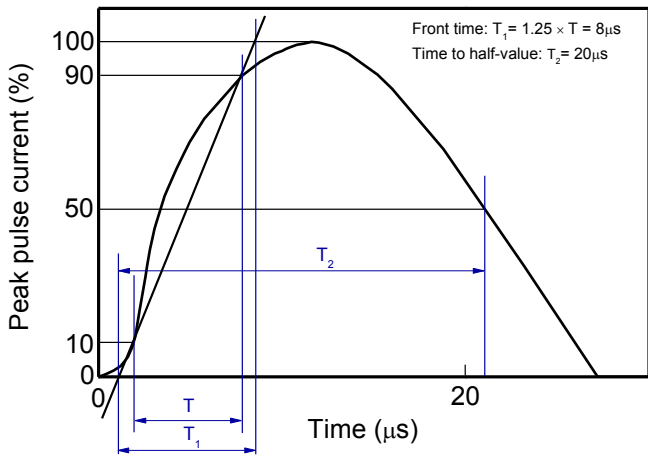


8/20 $\mu\text{s}$  waveform per IEC61000-4-5

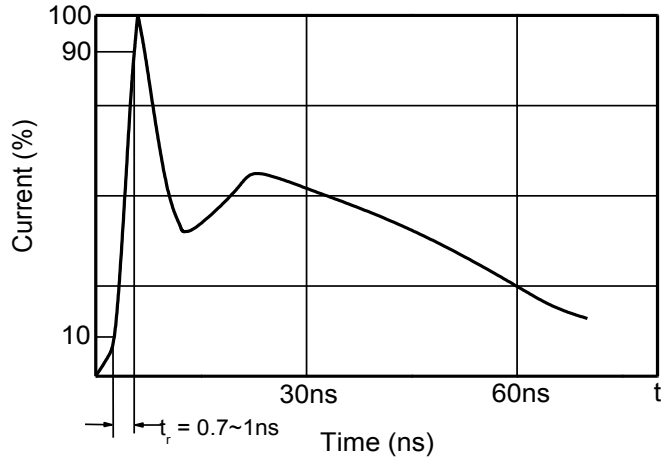





Contact discharge current waveform per IEC61000-4-2

### ESDU3V3ADB

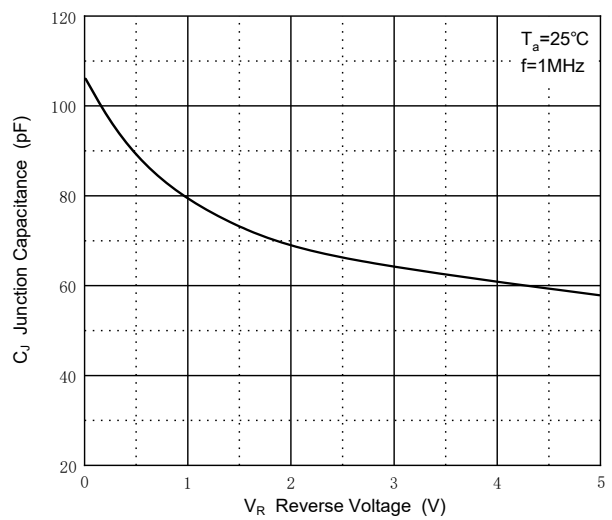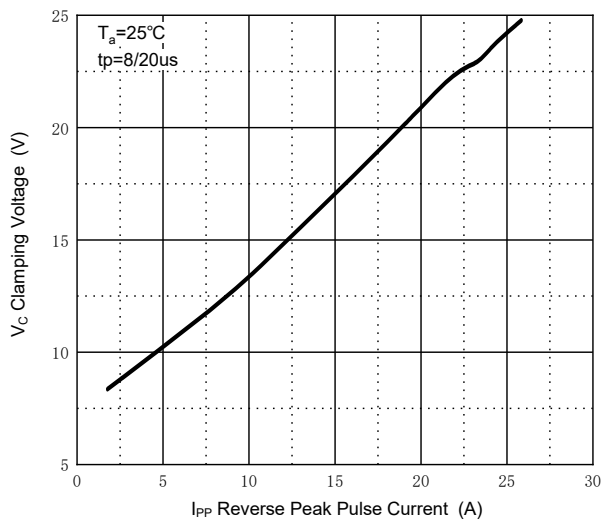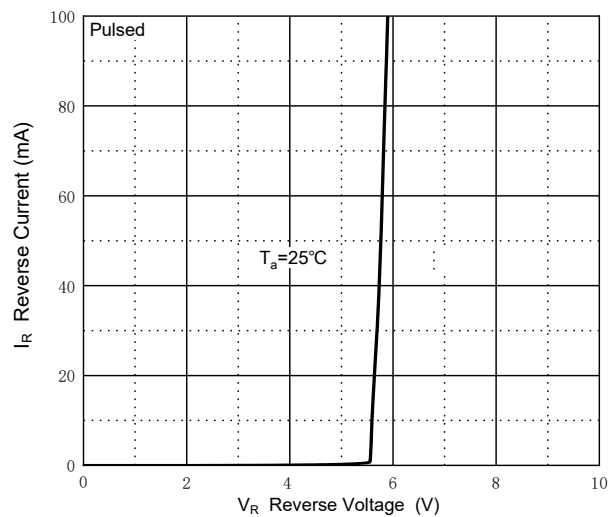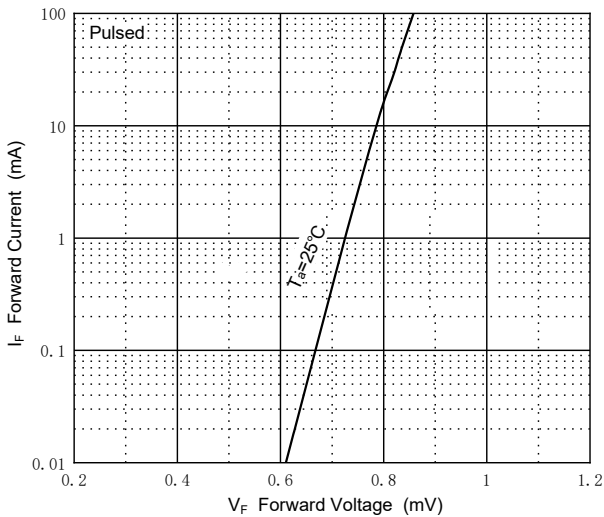







### ESDU5V0ADB

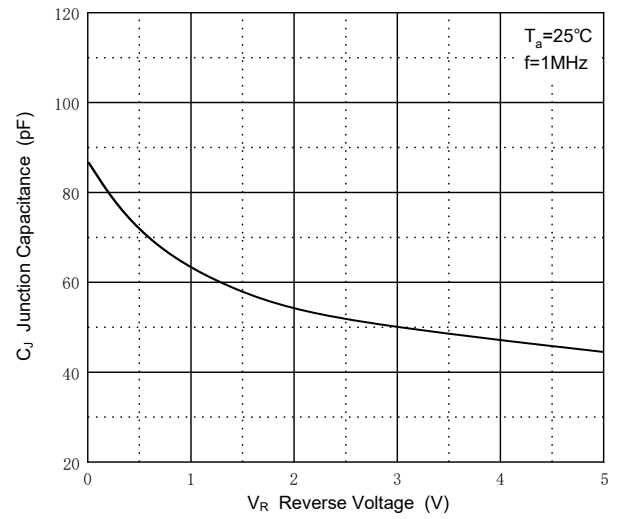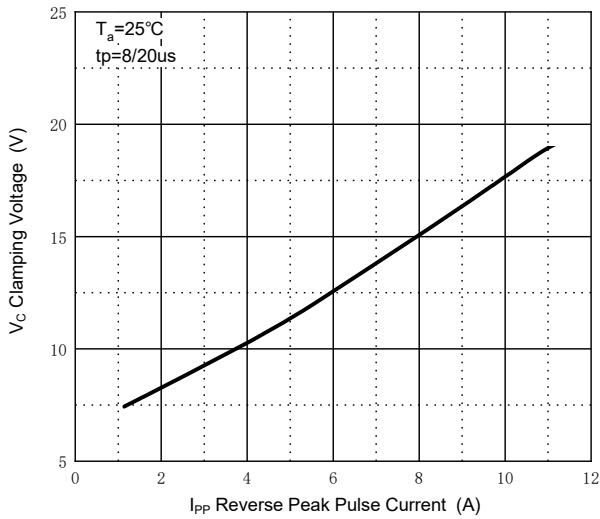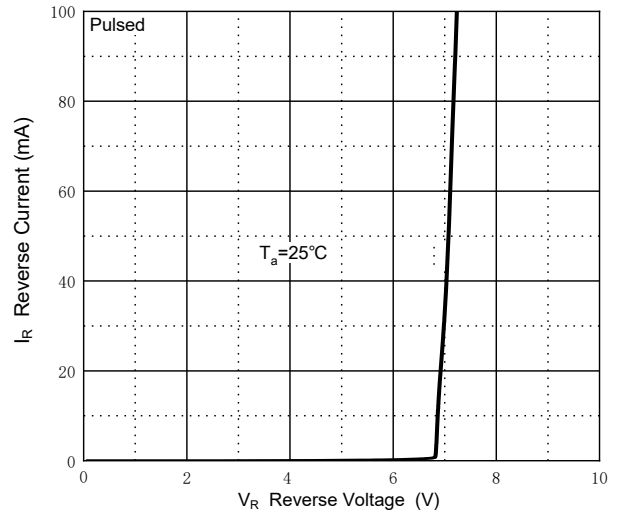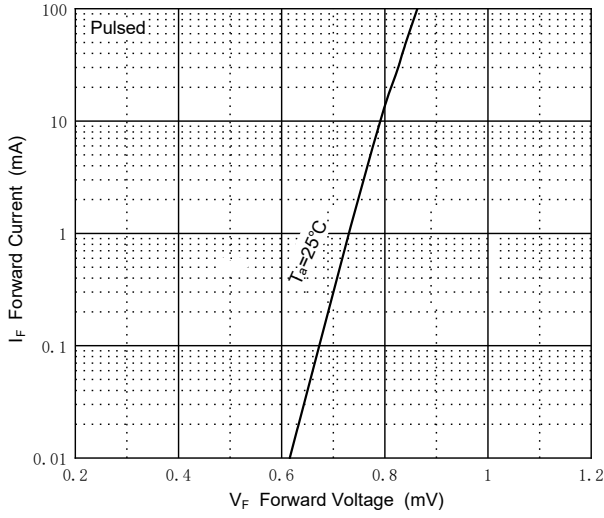



### ESDU12VADB

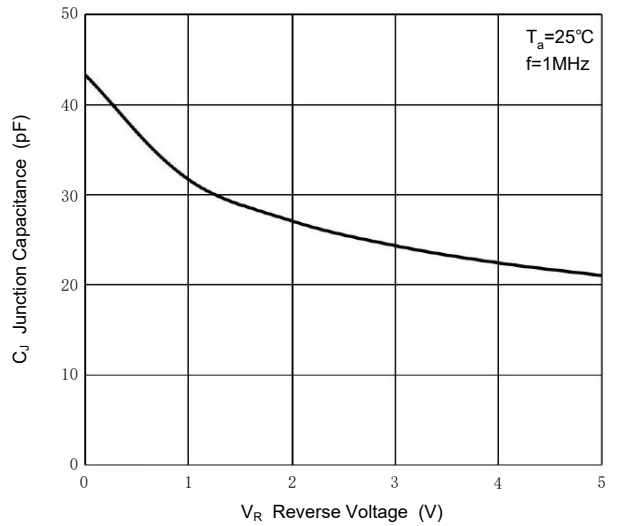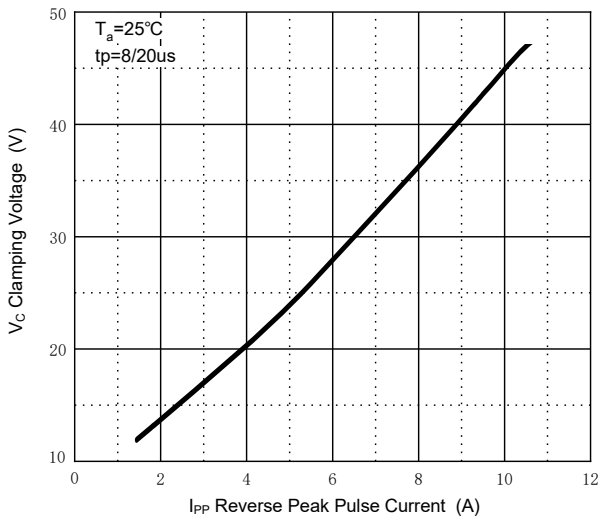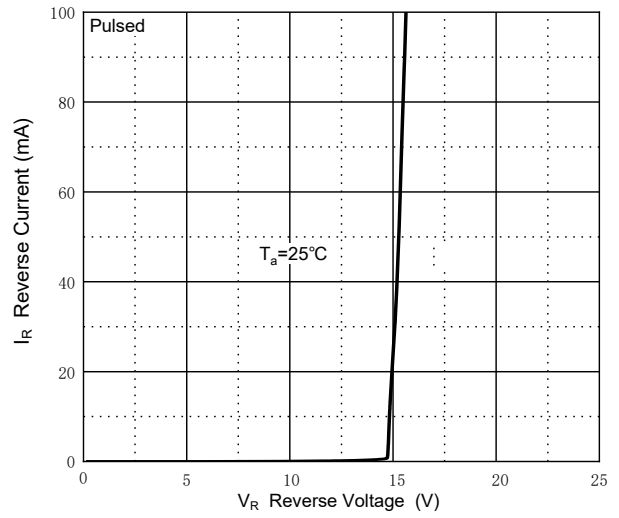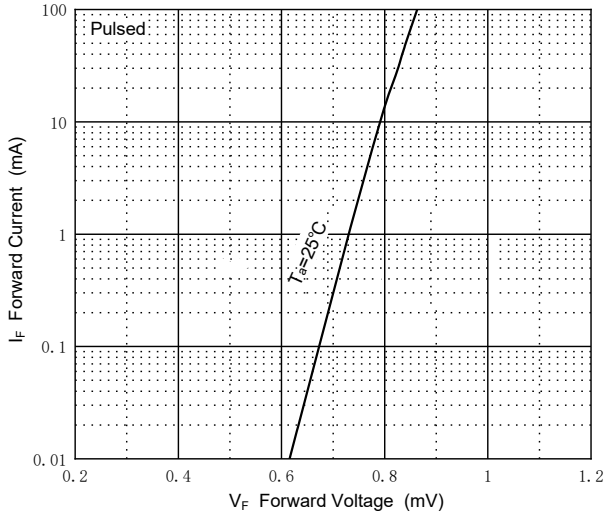





### Package Outline

DFN1x0.6-2L-0011


Dimensions in mm

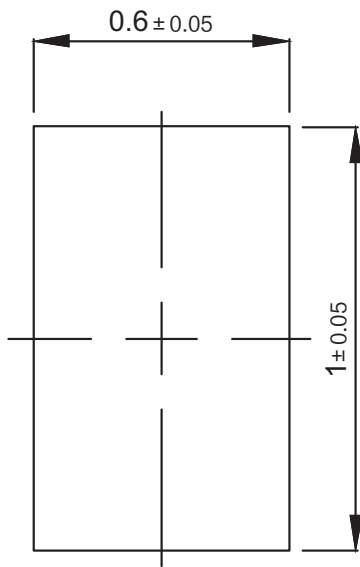

TOP VIEW

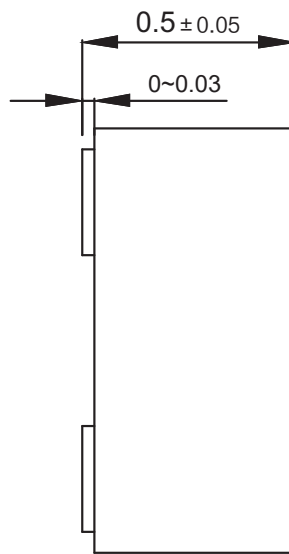

SIDE VIEW

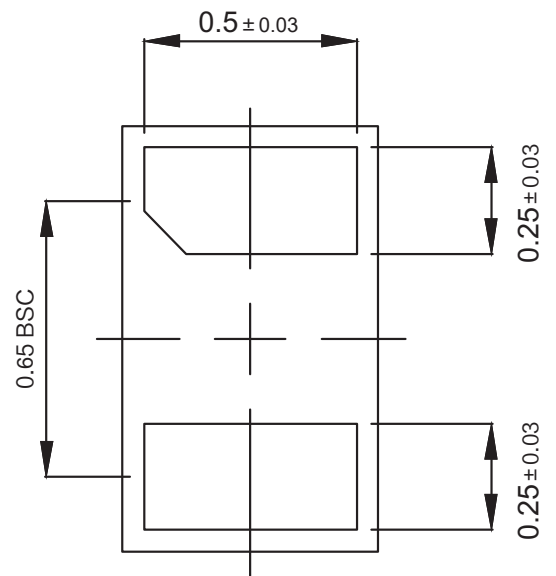

BOTTOM VIEW

### Ordering Information

Device	Package	Shipping
ESDU...ADB	DFN1x0.6-2L	10,000PCS/Reel&7inches

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Pingjingsemi](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)