




PJ78M05TE

3-Terminal Voltage Regulator

Features

- Input Voltage up to 35V
- Output Voltage: 5V
- Output Current: 0.5A (Max)
- Overload Protection and Short-Circuit Limiting.

TO-252

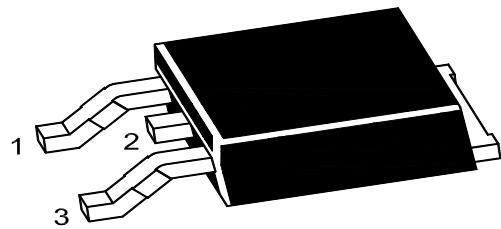


1、IN 2、GND 3、OUT

Absolute Maximum Ratings

Ratings at $T_A = 25^\circ\text{C}$ unless otherwise specified.

Parameter	Symbol	Value	Unit
Input Voltage	V_I	35	V
Thermal Resistance Junction-Ambient	$R_{\theta JA}$	100	$^\circ\text{C}/\text{W}$
Thermal Resistance Junction-Case	$R_{\theta JC}$	8.0	$^\circ\text{C}/\text{W}$
Operating Temperature Range	T_{OPR}	-40~125	$^\circ\text{C}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55~150	$^\circ\text{C}$

Application Circuit

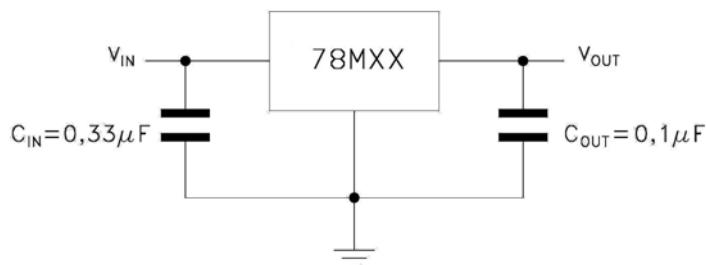



PJ78M05TE

3-Terminal Voltage Regulator

Electrical Characteristics

Ratings at $T_A = 25^\circ\text{C}$ unless otherwise specified.







Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_O	$T_J=25^\circ\text{C}$	4.9	5	5.1	V
		$V_i=7\text{V}-20\text{V}$ $I_o=5\text{mA}\sim 350\text{mA}$	4.8	5	5.2	V
Load Regulation	ΔV_O	$I_o=5\text{mA}-500\text{mA}$ $T_J=25^\circ\text{C}$	-	-	100	mV
		$I_o=5\text{mA}\sim 200\text{mA}$ $T_J=25^\circ\text{C}$	-	-	50	mV
Line Regulation	ΔV_O	$V_i=7\text{V}\sim 25\text{V}$ $T_J=25^\circ\text{C}$	-	-	100	mV
		$V_i=8\text{V}\sim 25\text{V}$ $T_J=25^\circ\text{C}$	-	-	50	mV
Output Noise Voltage	e_N	$B=10\text{Hz}\sim 100\text{KHz}$ $T_J=25^\circ\text{C}$	-	40	-	μV
Ripple Rejection	RR	$V_i=8\text{V}\sim 18\text{V}$ $f=120\text{Hz}$	62	-	-	dB
Short Circuit Current	I_{SC}	$V_i=35\text{V}$ $T_J=25^\circ\text{C}$	-	300	-	mA
Quiescent Current	I_Q	$T_J=25^\circ\text{C}$	-	-	6	mA
Quiescent Current Change	ΔI_Q	$V_i=8\text{V}\sim 25\text{V}$	-	-	0.8	mA
		$I_o=5\text{mA}\sim 350\text{mA}$	-	-	0.5	mA
Output Voltage Drift	$\Delta V_O/\Delta T$	$I_o=5\text{mA}$	-	-0.5	-	$\text{mV}/^\circ\text{C}$
Dropout Voltage	V_D	$T_J=25^\circ\text{C}$	-	2	-	V
Short Circuit Peak Current	I_{SCP}	$T_J=25^\circ\text{C}$	-	700	-	mA



PJ78M05TE

3-Terminal Voltage Regulator

Electrical Characteristics Curves

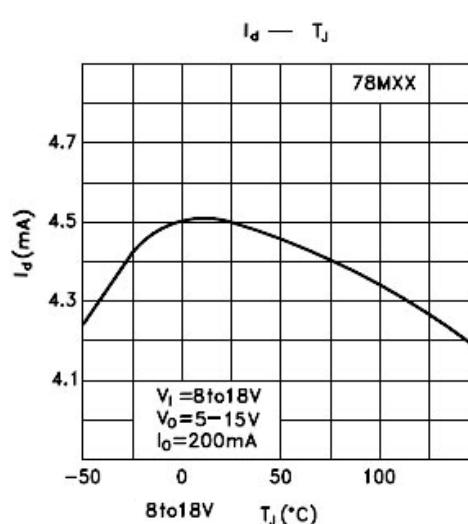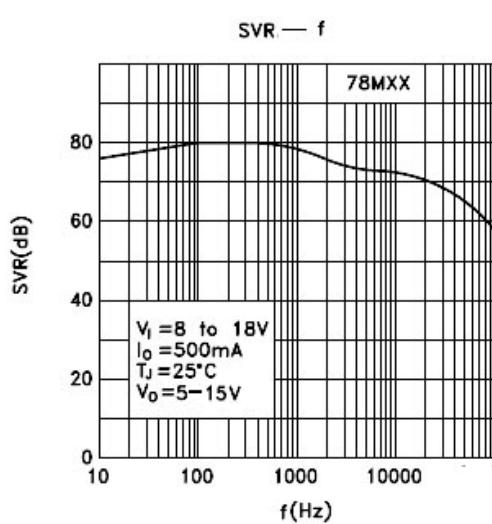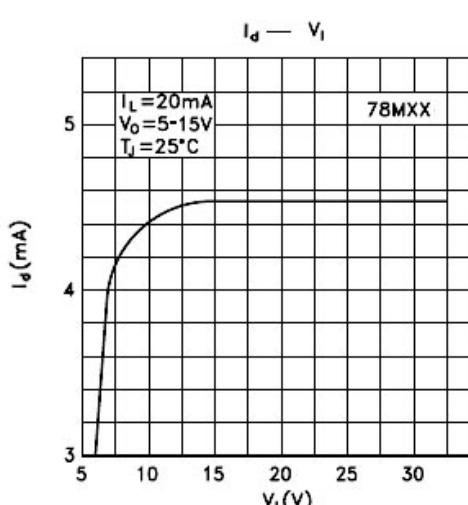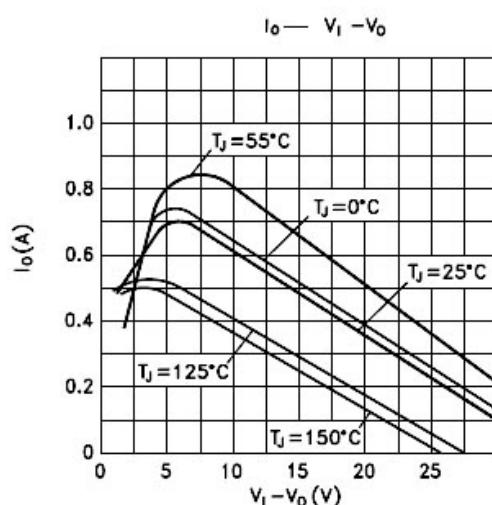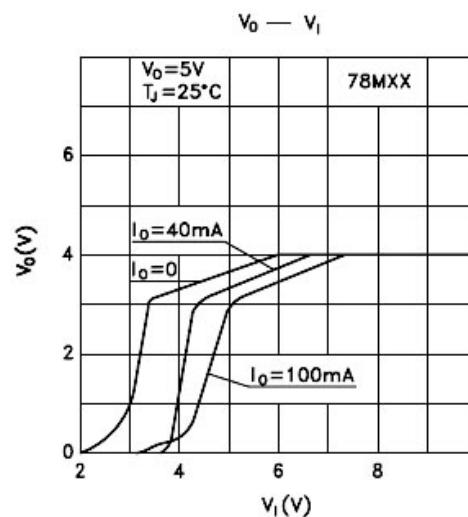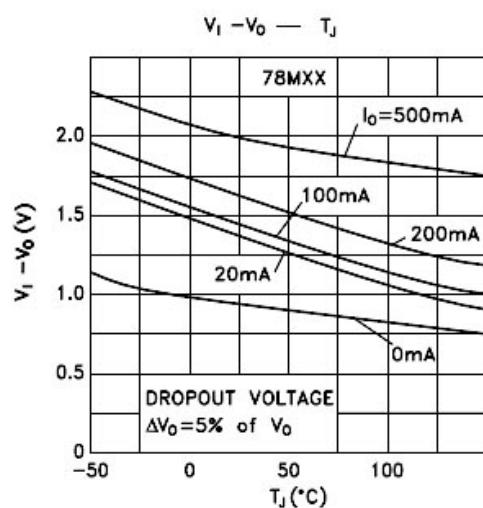




PJ78M05TE


3-Terminal Voltage Regulator

Package Outline

TO-252

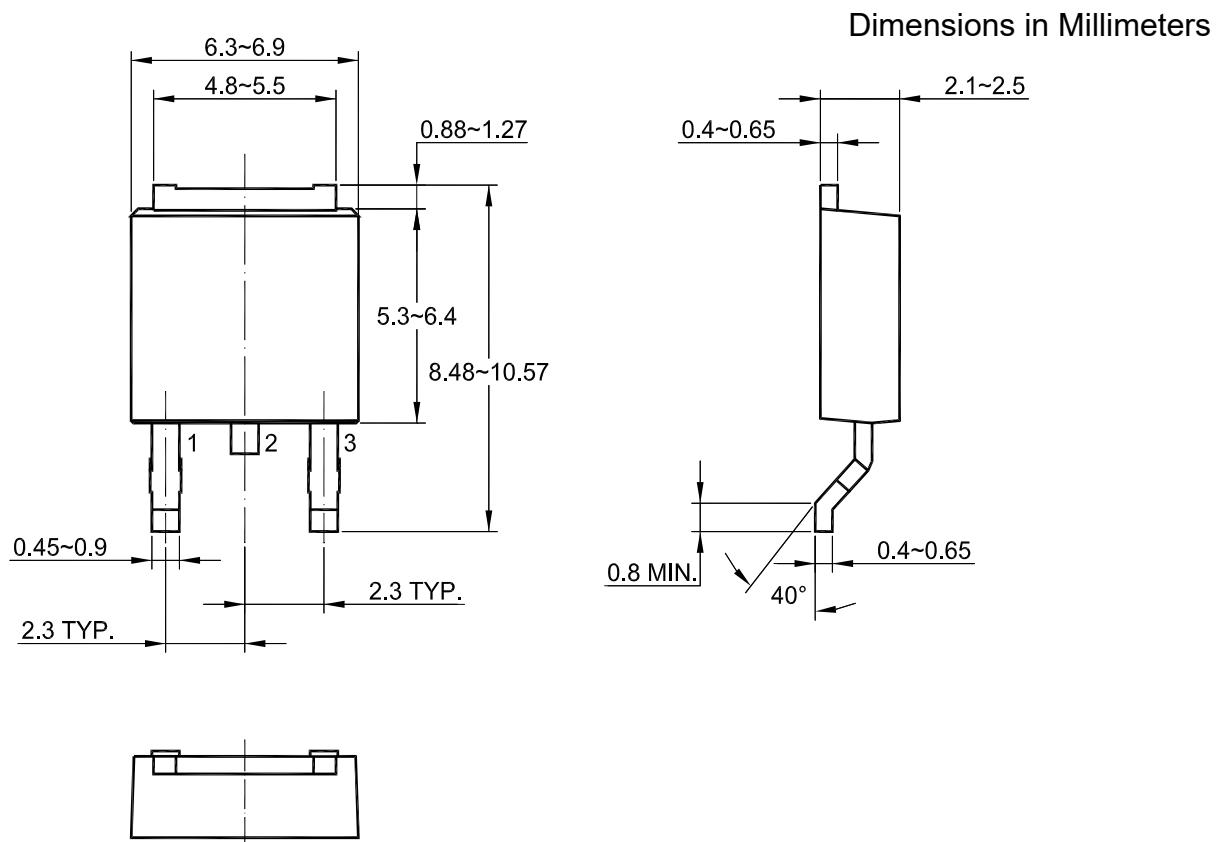

Recommended Soldering Footprint

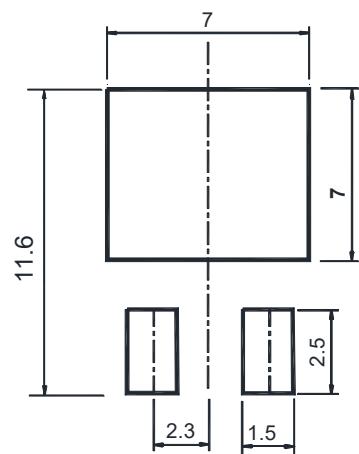

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [Pingjingsemi manufacturer:](#)

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L4953G](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TCR3DF13,LM\(CT](#)
[TCR3DF39,LM\(CT](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [L78MR05-E](#) [033150D](#) [033151B](#) [090756R](#) [636416C](#)
[NCV78M15BDTG](#) [702482B](#) [714954EB](#) [TLE42794GM](#) [TLE42994GM](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [NCV78M05ABDTRKG](#)
[NCV78M08BDTRKG](#) [NCP7808TG](#) [NCV571SN12T1G](#) [LV5680P-E](#) [CAJ24C256YI-GT3](#) [L78M15CV-DG](#) [L9474N](#)
[TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [NCP571SN09T1G](#) [MAX15006AASA/V+](#) [MIC5283-5.0YML-T5](#) [L4969URTR-E](#) [L78LR05D-MA-E](#)
[NCV7808BDTRKG](#) [L9466N](#) [NCP7805ETG](#) [SC7812CTG](#) [NCV7809BTG](#) [NCV571SN09T1G](#) [NCV317MBTG](#) [MC78M15CDTT5G](#)
[MC78M12CDTT5G](#) [L9468N](#) [LT1054IS8#TRPBF](#)