


# PJ79XXTE

## 3-Terminal Voltage Regulators

### Description

The PJ79XXTE series of three-terminal negative regulators are available in TO-252 package. Each type employs internal current limiting, thermal shutdown and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, it can deliver over 1.5A output current. Although designed as fixed voltage regulator, This device can be used with external components to obtain adjustable voltage and currents.

TO-252

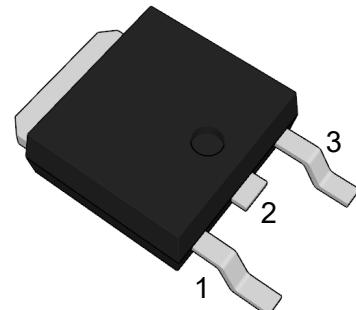

1. GND 2. VIN 3. VOUT

### Features

- Input voltage: up to -35V
- Output voltage: -5V, -6V, -8V, -9V, -10V, -12V, -15V
- Output current up to 1.5 A
- Thermal overload protection
- Short circuit current limiting

### Applications

- DC motor drivers
- Household electric appliances
- Industrial power supplies
- Test and measurement equipment

### Ordering Information

Orderable Device	Package	Reel (inch)	Package Qty (PCS)	Eco Plan Note	MSL Level	Marking Code
PJ7905TE	TO-252	13	2500	RoHS & Green	MSL3	 79XX: Product code e.g. PJ7905TE:7905 YW: Year code and Week code
PJ7906TE						
PJ7908TE						
PJ7909TE						
PJ7910TE						
PJ7912TE						
PJ7915TE						


#### Note:

RoHS: PJ defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials.


Green: PJ defines "Green" to mean Halogen-Free and Antimony-Free.



## Function Block Diagram

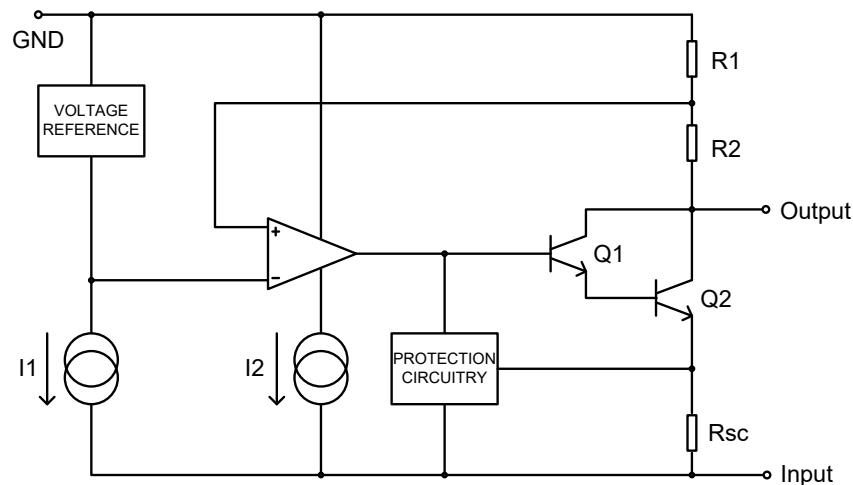

## Typical Application Circuit

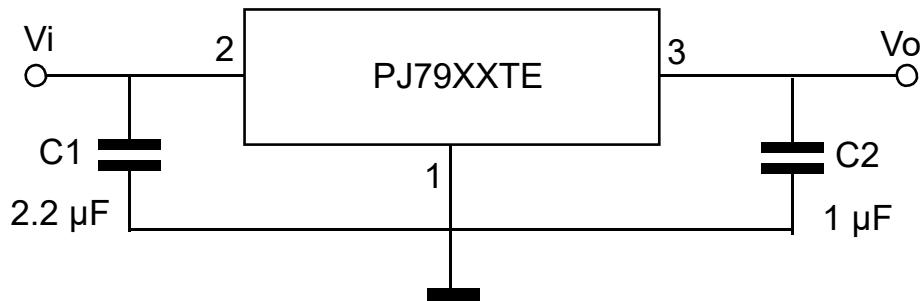

## Absolute Maximum Ratings

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Input Voltage	-Vi	35	V
Output Current	Io	1.5	A
Maximum Power Dissipation	P <sub>D</sub>	2	W
Operating Temperature Range	T <sub>OPR</sub>	0 to +125	°C
Storage Temperature Range	T <sub>STG</sub>	-65 to +150	°C



### PJ7905TE Electrical Characteristics

$V_i = -10V$ ,  $I_o = 500mA$ ,  $0 < T_j < 125^\circ C$ ,  $C_i = 2.2\mu F$ ,  $C_o = 1\mu F$ , unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	- $V_o$	$T_j = 25^\circ C$	4.8	5.0	5.2	V
		$I_o = 5mA$ to $1A$ $V_i = -7V$ to $-20V$	4.75	5.0	5.25	V
Line Regulation	$\Delta V_o$	$V_i = -7V$ to $-25V$ , $T_j = 25^\circ C$	--	--	100	mV
		$V_i = -8V$ to $-12V$ , $T_j = 25^\circ C$	--	--	50	mV
Load Regulation	$\Delta V_o$	$I_o = 5mA$ to $1.5A$ , $T_j = 25^\circ C$	--	--	100	mV
		$I_o = 250mA$ to $750mA$ , $T_j = 25^\circ C$	--	--	50	mV
Ripple Rejection	RR	$\Delta V_i = 10V$ , $f = 120Hz$	54	60	--	dB
Dropout Voltage	$V_D$	$I_o = 1A$ , $T_j = 25^\circ C$	--	2	--	V
Quiescent Current	$I_Q$	$T_j = 25^\circ C$	--	--	6	mA
Temperature coefficient of $V_o$	$\Delta V_o / \Delta T$	$I_o = 5mA$	--	0.5	--	mV/ $^\circ C$
Quiescent Current Change	$\Delta I_Q$	$I_o = 5mA$ to $1A$	--	--	0.8	mA
		$I_o = 500mA$ , $V_i = -8V$ to $-25V$	--	--	0.5	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz$ , $T_A = 25^\circ C$	--	40	--	$\mu V$



### PJ7906TE Electrical Characteristics

$V_i = -11V$ ,  $I_o = 500mA$ ,  $0 < T_j < 125^\circ C$ ,  $C_i = 2.2\mu F$ ,  $C_o = 1\mu F$ , unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	- $V_o$	$T_j = 25^\circ C$	5.75	6.0	6.25	V
		$I_o = 5mA$ to $1A$ $V_i = -9V$ to $-21V$	5.7	6.0	6.3	V
Line Regulation	$\Delta V_o$	$V_i = -8V$ to $-25V$ , $T_j = 25^\circ C$	--	--	120	mV
		$V_i = -9V$ to $-13V$ , $T_j = 25^\circ C$	--	--	60	mV
Load Regulation	$\Delta V_o$	$I_o = 5mA$ to $1.5A$ , $T_j = 25^\circ C$	--	--	120	mV
		$I_o = 250mA$ to $750mA$ , $T_j = 25^\circ C$	--	--	60	mV
Ripple Rejection	RR	$\Delta V_i = 10V$ , $f = 120Hz$	54	60	--	dB
Dropout Voltage	$V_D$	$I_o = 1A$ , $T_j = 25^\circ C$	--	2	--	V
Quiescent Current	$I_Q$	$T_j = 25^\circ C$	--	--	6	mA
Temperature coefficient of $V_o$	$\Delta V_o / \Delta T$	$I_o = 5mA$	--	0.6	--	mV/ $^\circ C$
Quiescent Current Change	$\Delta I_Q$	$I_o = 5mA$ to $1A$	--	--	0.5	mA
		$V_i = -8V$ to $-25V$	--	--	1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz$ , $T_A = 25^\circ C$	--	130	--	$\mu V$



### PJ7908TE Electrical Characteristics

$V_i = -14V$ ,  $I_o = 500mA$ ,  $0 < T_j < 125^\circ C$ ,  $C_i = 2.2\mu F$ ,  $C_o = 1\mu F$ , unless otherwise specified.


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	- $V_o$	$T_j = 25^\circ C$	7.7	8.0	8.3	V
		$I_o = 5mA$ to $1A$ $V_i = -10V$ to $-23V$	7.6	8.0	8.4	V
Line Regulation	$\Delta V_o$	$V_i = -10.5V$ to $-25V$ , $T_j = 25^\circ C$	--	--	160	mV
		$V_i = -11V$ to $-17V$ , $T_j = 25^\circ C$	--	--	80	mV
Load Regulation	$\Delta V_o$	$I_o = 5mA$ to $1.5A$ , $T_j = 25^\circ C$	--	--	160	mV
		$I_o = 250mA$ to $750mA$ , $T_j = 25^\circ C$	--	--	80	mV
Ripple Rejection	RR	$\Delta V_i = 10V$ , $f = 120Hz$	54	60	--	dB
Dropout Voltage	$V_D$	$I_o = 1A$ , $T_j = 25^\circ C$	--	2	--	V
Quiescent Current	$I_Q$	$T_j = 25^\circ C$	--	--	6	mA
Temperature coefficient of $V_o$	$\Delta V_o / \Delta T$	$I_o = 5mA$	--	0.8	--	mV/°C
Quiescent Current Change	$\Delta I_Q$	$I_o = 5mA$ to $1A$	--	--	0.5	mA
		$V_i = -10.5V$ to $-25V$	--	--	1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz$ , $T_A = 25^\circ C$	--	175	--	μV



### PJ7909TE Electrical Characteristics

$V_i = -15V$ ,  $I_o = 500mA$ ,  $0 < T_j < 125^\circ C$ ,  $C_i = 2.2\mu F$ ,  $C_o = 1\mu F$ , unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	- $V_o$	$T_j = 25^\circ C$	8.7	9.0	9.3	V
		$I_o = 5mA$ to $1A$ $V_i = -7V$ to $-20V$	8.6	9.0	9.4	V
Line Regulation	$\Delta V_o$	$V_i = -11.5V$ to $-26V$ , $T_j = 25^\circ C$	--	--	180	mV
		$V_i = -12V$ to $-18V$ , $T_j = 25^\circ C$	--	--	90	mV
Load Regulation	$\Delta V_o$	$I_o = 5mA$ to $1.5A$ , $T_j = 25^\circ C$	--	--	180	mV
		$I_o = 250mA$ to $750mA$ , $T_j = 25^\circ C$	--	--	90	mV
Ripple Rejection	RR	$\Delta V_i = 10V$ , $f = 120Hz$	54	60	--	dB
Dropout Voltage	$V_D$	$I_o = 1A$ , $T_j = 25^\circ C$	--	2	--	V
Quiescent Current	$I_Q$	$T_j = 25^\circ C$	--	3	6	mA
Temperature coefficient of $V_o$	$\Delta V_o / \Delta T$	$I_o = 5mA$	--	0.9	--	mV/ $^\circ C$
Quiescent Current Change	$\Delta I_Q$	$I_o = 5mA$ to $1A$	--	--	0.5	mA
		$V_i = -11.5V$ to $-26V$	--	--	1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz$ , $T_A = 25^\circ C$	--	175	--	$\mu V$



# PJ79XXTE

## 3-Terminal Voltage Regulators

### PJ7910TE Electrical Characteristics

$V_i = -17V$ ,  $I_o = 500mA$ ,  $0 < T_j < 125^\circ C$ ,  $C_i = 2.2\mu F$ ,  $C_o = 1\mu F$ , unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	- $V_o$	$T_j = 25^\circ C$	9.6	10	10.4	V
		$I_o = 5mA$ to $1A$ $V_i = -10V$ to $-23V$	9.5	10	10.5	V
Line Regulation	$\Delta V_o$	$V_i = -12.5V$ to $-28V$ , $T_j = 25^\circ C$	--	--	200	mV
		$V_i = -14V$ to $-20V$ , $T_j = 25^\circ C$	--	--	100	mV
Load Regulation	$\Delta V_o$	$I_o = 5mA$ to $1.5A$ , $T_j = 25^\circ C$	--	--	200	mV
		$I_o = 250mA$ to $750mA$ , $T_j = 25^\circ C$	--	--	100	mV
Ripple Rejection	RR	$\Delta V_i = 10V$ , $f = 120Hz$	54	60	--	dB
Dropout Voltage	$V_D$	$I_o = 1A$ , $T_j = 25^\circ C$	--	2	--	V
Quiescent Current	$I_Q$	$T_j = 25^\circ C$	--	--	6	mA
Temperature coefficient of $V_o$	$\Delta V_o / \Delta T$	$I_o = 5mA$	--	1	--	mV/ $^\circ C$
Quiescent Current Change	$\Delta I_Q$	$I_o = 5mA$ to $1A$	--	--	0.5	mA
		$V_i = -12.5V$ to $-28V$	--	--	1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz$ , $T_A = 25^\circ C$	--	280	--	$\mu V$




# PJ79XXTE

## 3-Terminal Voltage Regulators

### PJ7912TE Electrical Characteristics

$V_i = -19V$ ,  $I_o = 500mA$ ,  $0 < T_j < 125^\circ C$ ,  $C_i = 2.2\mu F$ ,  $C_o = 1\mu F$ , unless otherwise specified.


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	- $V_o$	$T_j = 25^\circ C$	11.5	12	12.5	V
		$I_o = 5mA$ to $1A$ $V_i = -7V$ to $-20V$	11.4	12	12.6	V
Line Regulation	$\Delta V_o$	$V_i = -14.5V$ to $-30V$ , $T_j = 25^\circ C$	--	--	240	mV
		$V_i = -16V$ to $-22V$ , $T_j = 25^\circ C$	--	--	120	mV
Load Regulation	$\Delta V_o$	$I_o = 5mA$ to $1.5A$ , $T_j = 25^\circ C$	--	--	240	mV
		$I_o = 250mA$ to $750mA$ , $T_j = 25^\circ C$	--	--	120	mV
Ripple Rejection	RR	$\Delta V_i = 10V$ , $f = 120Hz$	54	60	--	dB
Dropout Voltage	$V_D$	$I_o = 1A$ , $T_j = 25^\circ C$	--	2	--	V
Quiescent Current	$I_Q$	$T_j = 25^\circ C$	--	--	6	mA
Temperature coefficient of $V_o$	$\Delta V_o / \Delta T$	$I_o = 5mA$	--	1.2	--	mV/°C
Quiescent Current Change	$\Delta I_Q$	$I_o = 5mA$ to $1A$	--	--	0.5	mA
		$V_i = -14.5V$ to $-30V$	--	--	1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz$ , $T_A = 25^\circ C$	--	200	--	µV



### PJ7915TE Electrical Characteristics

$V_i = -23V$ ,  $I_o = 500mA$ ,  $0 < T_j < 125^\circ C$ ,  $C_i = 2.2\mu F$ ,  $C_o = 1\mu F$ , unless otherwise specified.


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage	- $V_o$	$T_j = 25^\circ C$	14.4	15	15.6	V
		$I_o = 5mA$ to $1A$ $V_i = -7V$ to $-20V$	14.25	15	15.75	V
Line Regulation	$\Delta V_o$	$V_i = -17.5V$ to $-30V$ , $T_j = 25^\circ C$	--	--	300	mV
		$V_i = -20V$ to $-26V$ , $T_j = 25^\circ C$	--	--	150	mV
Load Regulation	$\Delta V_o$	$I_o = 5mA$ to $1.5A$ , $T_j = 25^\circ C$	--	--	300	mV
		$I_o = 250mA$ to $750mA$ , $T_j = 25^\circ C$	--	--	150	mV
Ripple Rejection	RR	$\Delta V_i = 10V$ , $f = 120Hz$	54	60	--	dB
Dropout Voltage	$V_D$	$I_o = 1A$ , $T_j = 25^\circ C$	--	2	--	V
Quiescent Current	$I_Q$	$T_j = 25^\circ C$	--	--	6	mA
Temperature coefficient of $V_o$	$\Delta V_o / \Delta T$	$I_o = 5mA$	--	1.5	--	mV/ $^\circ C$
Quiescent Current Change	$\Delta I_Q$	$I_o = 5mA$ to $1A$	--	--	0.5	mA
		$V_i = -17.5V$ to $-30V$	--	--	1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100kHz$ , $T_A = 25^\circ C$	--	250	--	$\mu V$




## Package Outline

TO-252


Dimensions in mm

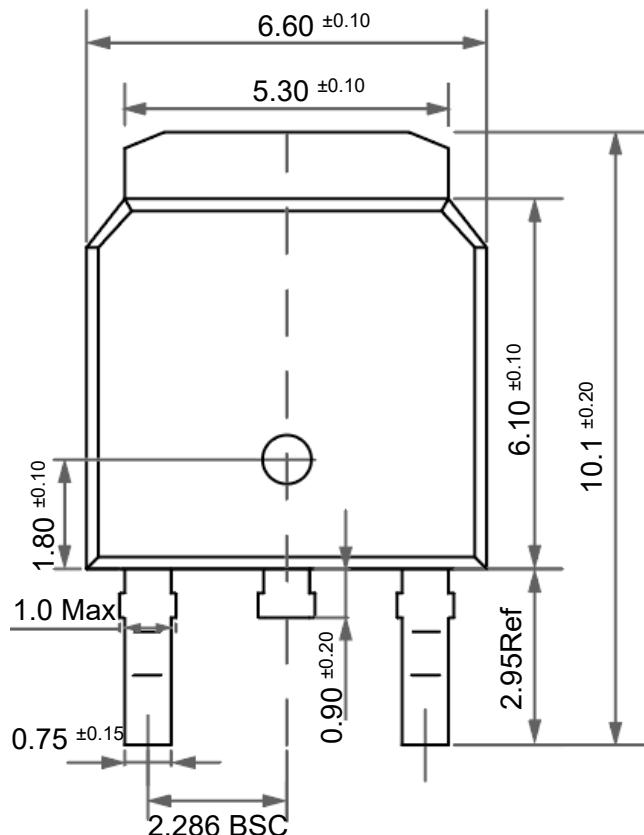

**Front View**

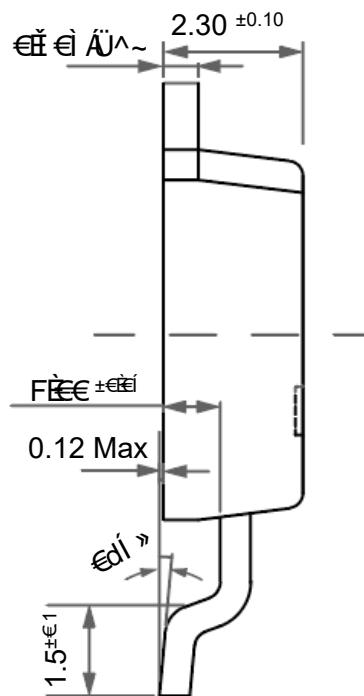

**Side View**

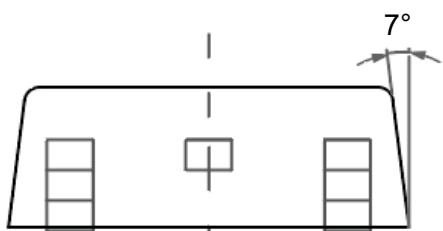

**Bottom View**

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for LDO Voltage Regulators category:***

***Click to view products by Pingjingsemi manufacturer:***

Other Similar products are found below :

[AP7363-SP-13](#) [NCV8664CST33T3G](#) [L79M05TL-E](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT](#) [TLF4949EJ](#)  
[NCP4687DH15T1G](#) [NCV8703MX30TCG](#) [LP2951CN](#) [NCV4269CPD50R2G](#) [AP7315-25W5-7](#) [NCV47411PAAJR2G](#) [AP2111H-1.2TRG1](#)  
[ZLDO1117QK50TC](#) [AZ1117ID-ADJTRG1](#) [NCV4263-2CPD50R2G](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#) [TLE4471GXT](#) [AP7315-33SA-7](#)  
[NCV4266-2CST33T3G](#) [NCP715SQ15T2G](#) [NCV8623MN-50R2G](#) [NCV563SQ18T1G](#) [NCV8664CDT33RKG](#) [NCV4299CD250R2G](#)  
[NCP715MX30TBG](#) [NCV8702MX25TCG](#) [L974113TR](#) [TLE7270-2E](#) [NCV562SQ25T1G](#) [AP2213D-3.3TRG1](#) [AP2202K-2.6TRE1](#)  
[NCV8170BMX300TCG](#) [NCV8152MX300180TCG](#) [NCP700CMT45TBG](#) [AP7315-33W5-7](#) [LD56100DPU28R](#) [NCP154MX180300TAG](#)  
[AP2210K-3.0TRE1](#) [AP2113AMTR-G1](#) [NJW4104U2-33A-TE1](#) [MP2013AGG-5-P](#) [NCV8775CDT50RKG](#) [NJM2878F3-45-TE1](#) [S-19214B00A-V5T2U7](#) [S-19214B50A-V5T2U7](#) [S-19213B50A-V5T2U7](#) [S-19214BC0A-E8T1U7\\*1](#)