



PJM07P30PA

P-Channel Enhancement Mode Power MOSFET

Product Summary

- $V_{DS} = -30V, I_D = -7A$
- $R_{DS(on)} < 28m\Omega @ V_{GS} = -10V$
- $R_{DS(on)} < 50m\Omega @ V_{GS} = -4.5V$


Features

- Advanced Trench Technology
- 100% Avalanche Tested
- RoHS and Reach Compliant
- Halogen and Antimony Free
- Moisture Sensitivity Level 3

Application

- Load Switch
- PWM Applications
- Power Management

Marking Code



Absolute Maximum Ratings


Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$-V_{DS}$	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	$-I_D$	7	A
Drain Current-Pulsed ^{Note1}	$-I_{DM}$	28	A
Maximum Power Dissipation	P_D	3	W
Single Pulse Avalanche Energy ^{Note2}	E_{AS}	20	mJ
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

Thermal Characteristics

Thermal Resistance, Junction-to-Ambient ^{Note3}	$R_{\theta JA}$	41.7	°C/W
--	-----------------	------	------


SOP-8

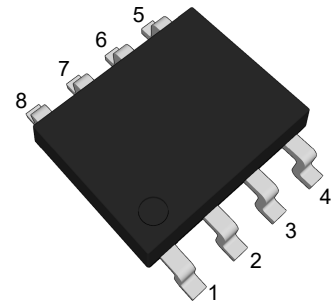

(Top View)

Pin	Description
1,2,3	Source
4	Gate
5,6,7,8	Drain

Schematic Diagram





PJM07P30PA

P-Channel Enhancement Mode Power MOSFET

Electrical Characteristics

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	$-V_{(BR)DSS}$	$V_{GS}=0V, I_D=-250\mu A$	30	--	--	V
Zero Gate Voltage Drain Current	$-I_{DSS}$	$V_{DS}=-30V, V_{GS}=0V$	--	--	1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$	--	--	± 100	nA
Gate Threshold Voltage ^{Note4}	$-V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	1	1.6	2.5	V
Drain-Source On-Resistance ^{Note4}	$R_{DS(on)}$	$V_{GS}=-10V, I_D=-7A$	--	22	28	m Ω
		$V_{GS}=-4.5V, I_D=-4A$	--	35	50	m Ω
Forward Transconductance ^{Note4}	g_{FS}	$V_{DS}=-5V, I_D=-1A$	--	4.7	--	S
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS}=-15V, V_{GS}=0V, f=1MHz$	--	610	--	pF
Output Capacitance	C_{oss}		--	116	--	pF
Reverse Transfer Capacitance	C_{rss}		--	93.5	--	pF
Gate Resistance	R_g	$V_{DS}=0V, V_{GS}=0V, f=1MHz$	--	15.8	--	Ω
Total Gate Charge	Q_g	$V_{DS}=-15V, I_D=-8A,$ $V_{GS}=-10V$	--	51	--	nC
Gate-Source Charge	Q_{gs}		--	9.8	--	nC
Gate-Drain Charge	Q_{gd}		--	8.2	--	nC
Switching Characteristics						
Turn-on Delay Time	$t_{d(on)}$	$V_{DD}=-15V, I_D=-1A$ $V_{GS}=-10V, R_{GEN}=6\Omega$	--	13	--	nS
Turn-on Rise Time	t_r		--	15	--	nS
Turn-off Delay Time	$t_{d(off)}$		--	198	--	nS
Turn-off Fall Time	t_f		--	98	--	nS
Source-Drain Diode Characteristics						
Diode Forward Voltage ^{Note4}	$-V_{SD}$	$V_{GS}=0V, I_S=-7A$	--	--	1.2	V
Diode Forward Current ^{Note3}	$-I_S$		--	--	7	A

Note: 1. Repetitive Rating: Pulse width limited by maximum junction temperature.

2. EAS Condition: $T_J=25^\circ C, V_{DD}=-15V, V_G=-10V, R_G=25\Omega, L=0.5mH, I_{AS}=-9A$.

3. Surface Mounted on FR4 Board, $t \leq 10$ sec.







4. Pulse Test: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.



PJM07P30PA

P-Channel Enhancement Mode Power MOSFET



Typical Characteristic Curves

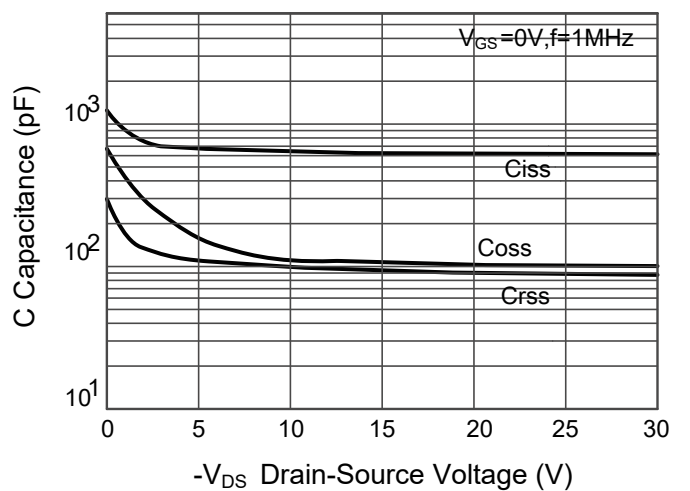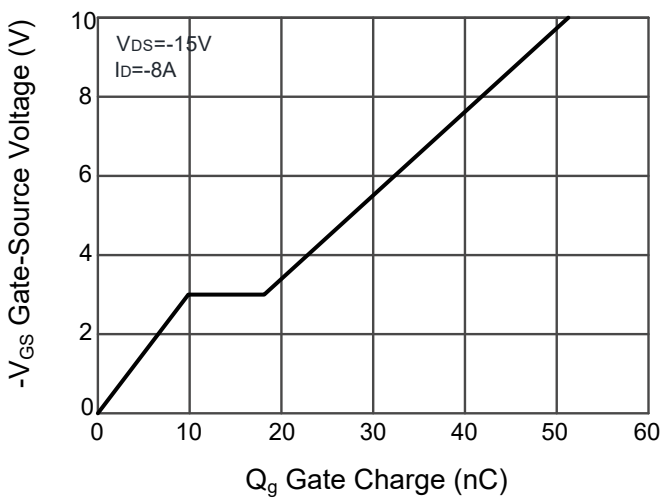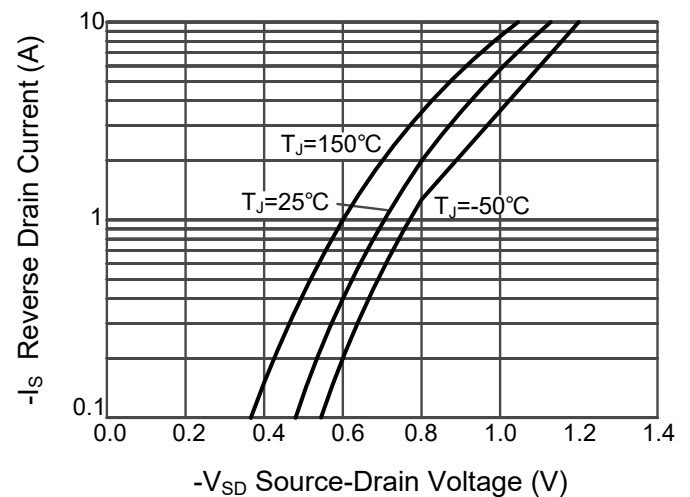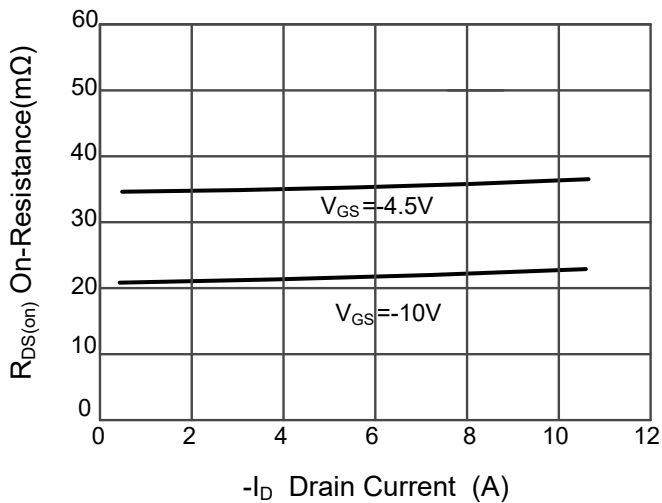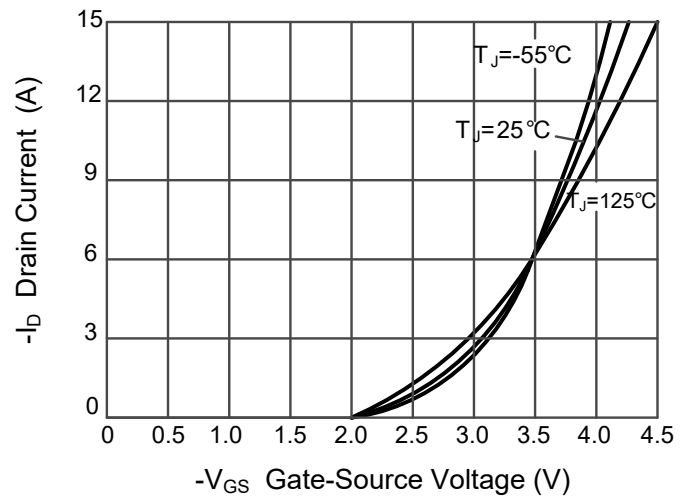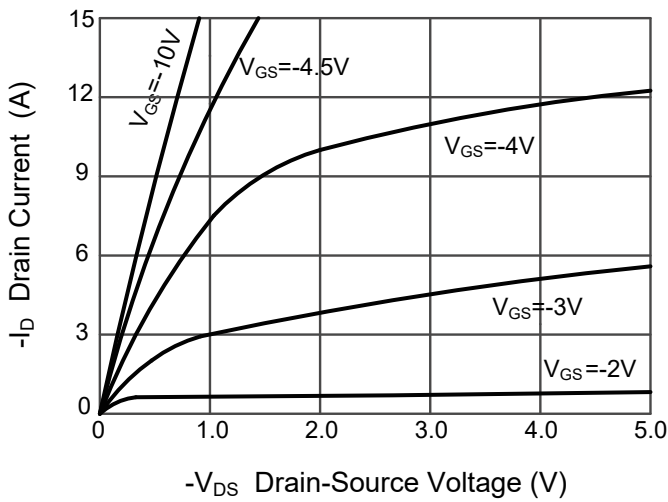



PJM07P30PA

P-Channel Enhancement Mode Power MOSFET

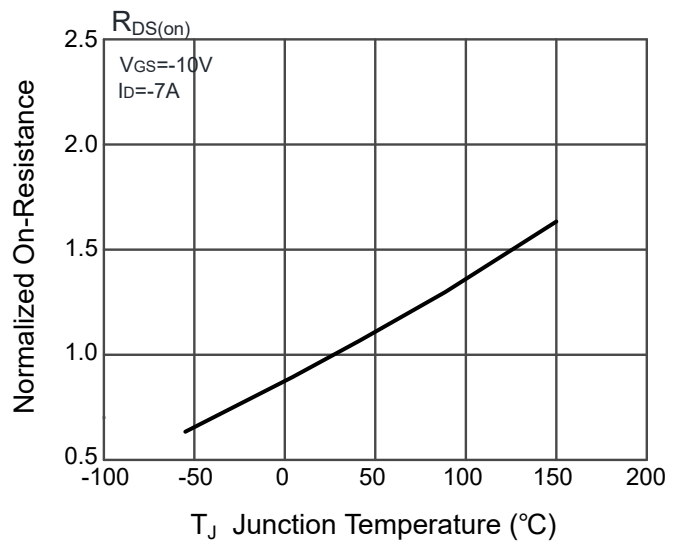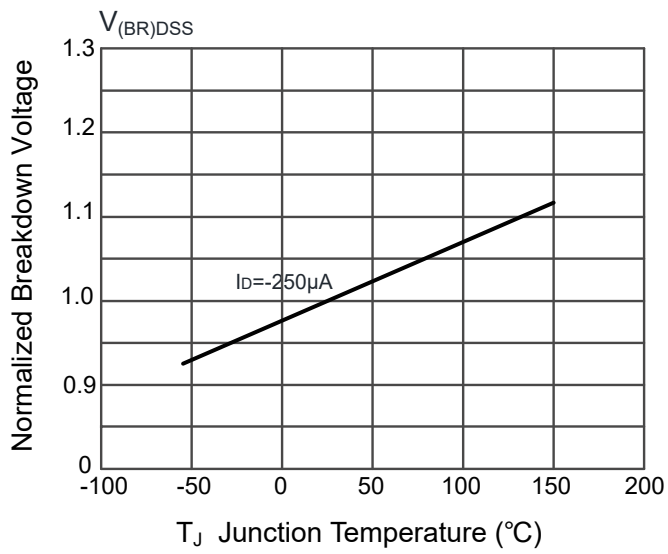




PJM07P30PA

P-Channel Enhancement Mode Power MOSFET

Package Outline

SOP-8

Dimensions in mm

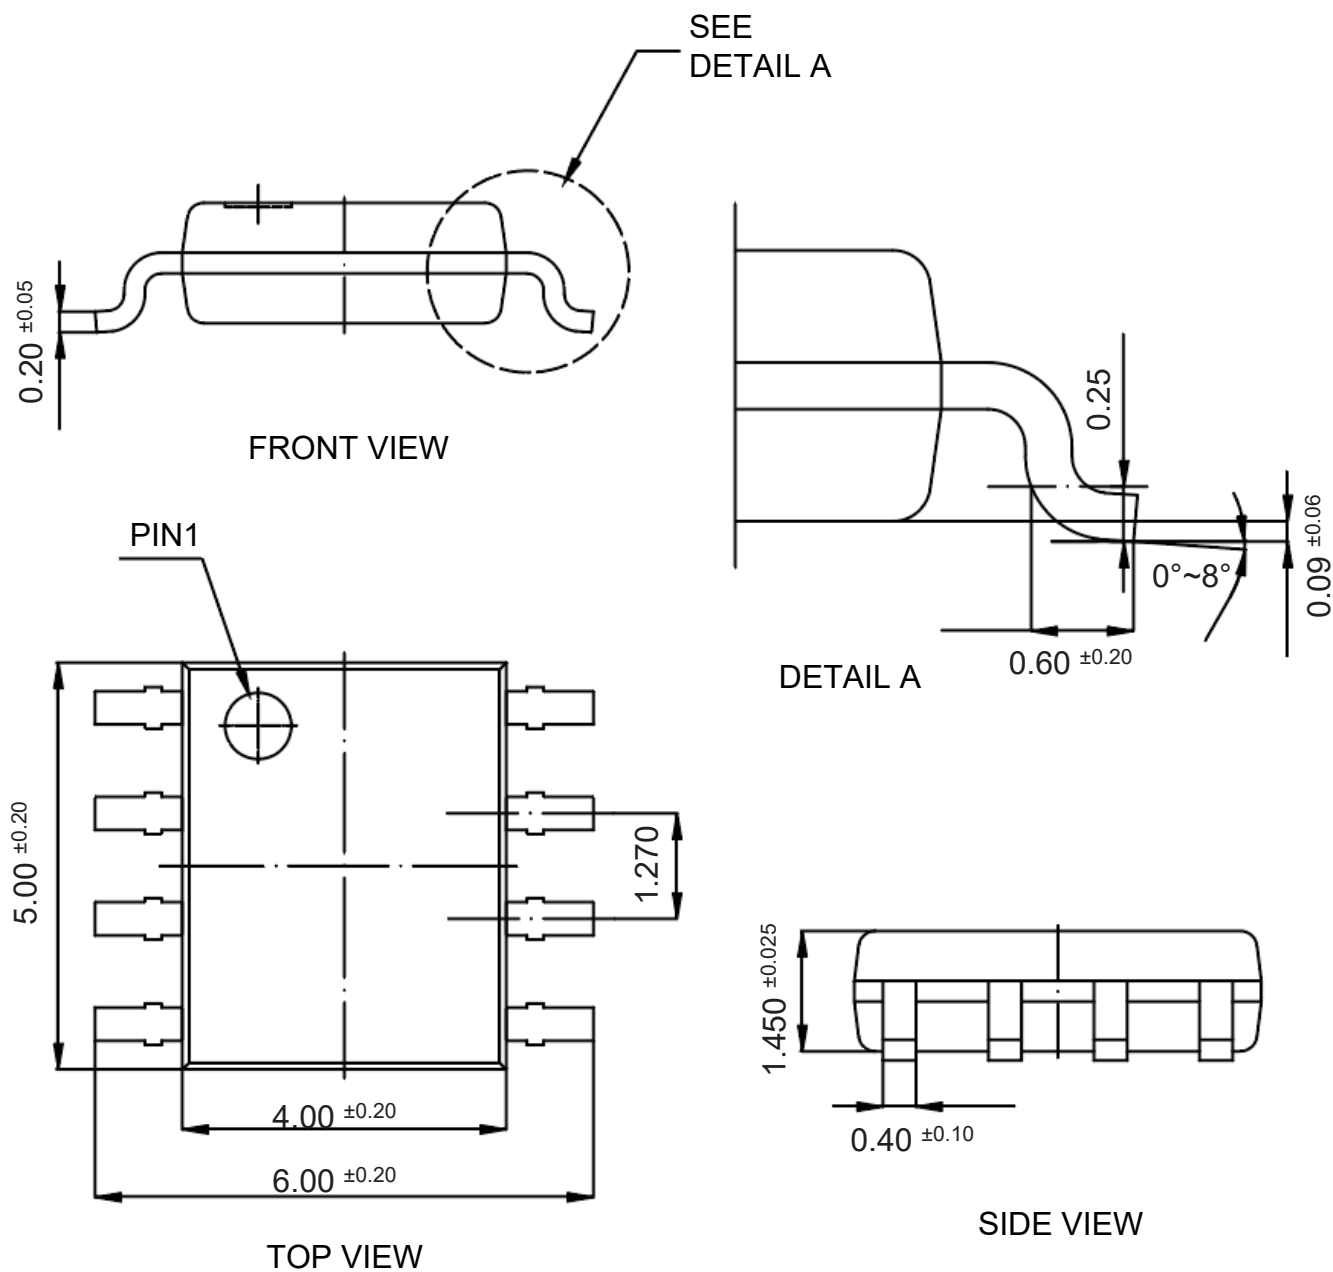


Ordering Information

Device	Package	Shipping
PJM07P30PA	SOP-8	4,000PCS/Reel&13inches



Conditions of Soldering and Storage

◆ Recommended condition of reflow soldering

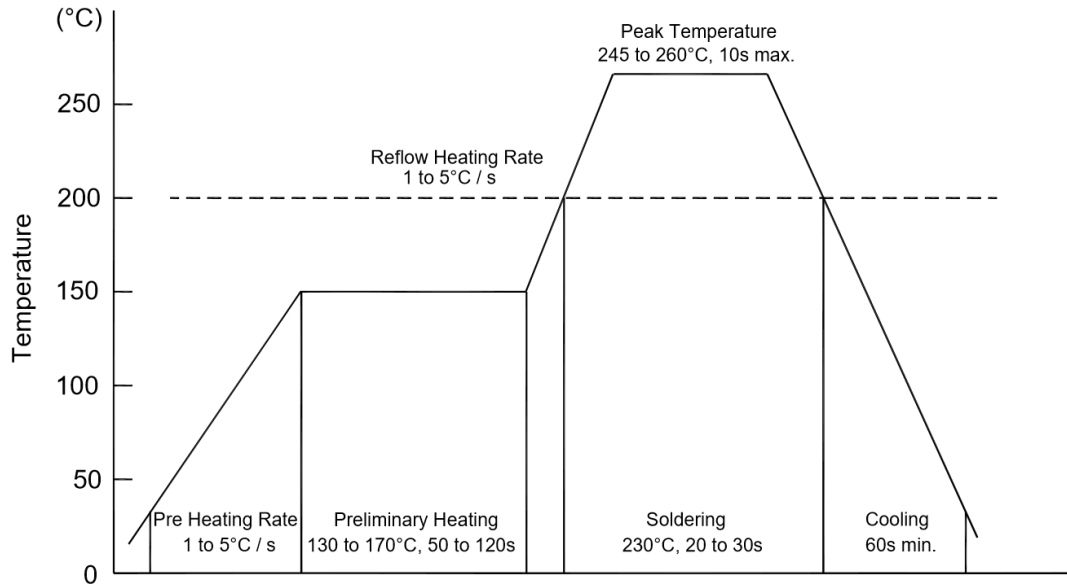

Recommended peak temperature is over 245°C. If peak temperature is below 245°C, you may adjust the following parameters:

- Time length of peak temperature (longer)
- Time length of soldering (longer)
- Thickness of solder paste (thicker)

◆ Conditions of hand soldering

- Temperature: 300°C
- Time: 3s max.
- Times: one time

◆ Storage conditions

- **Temperature**
5 to 40°C
- **Humidity**
30 to 80% RH
- **Recommended period**
One year after manufacturing




PJM07P30PA


P-Channel Enhancement Mode Power MOSFET

Package Specifications


- The method of packaging

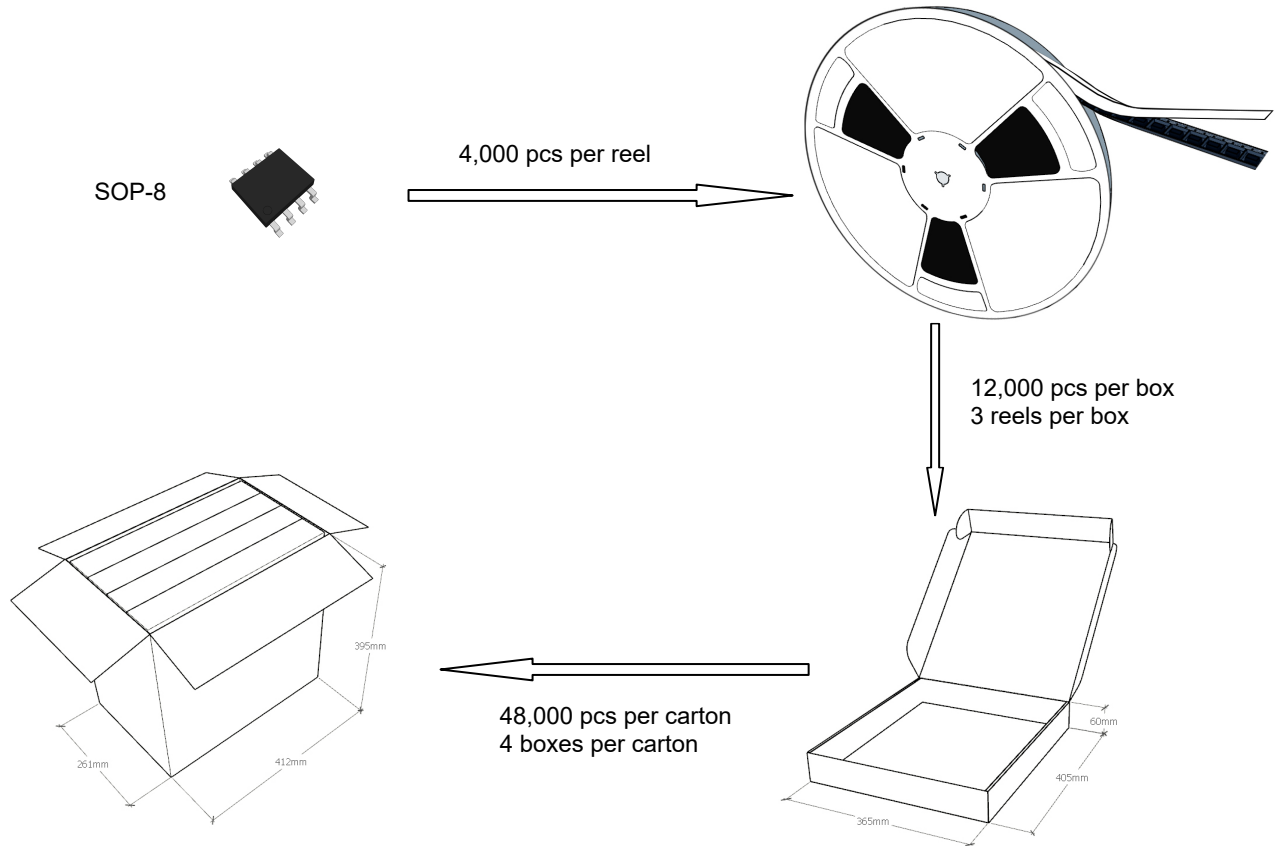

◆ Embossed tape and reel data

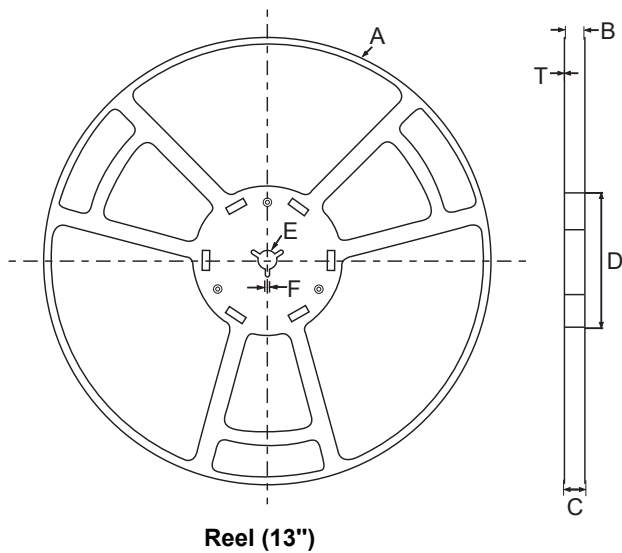

symbol	Value(unit:mm)
A	$\phi 330 \pm 1$
B	12.7 ± 0.5
C	16.5 ± 0.3
D	$\phi 99.5 \pm 0.5$
E	$\phi 13.6 \pm 0.3$
F	2.8 ± 0.3
T	1.9 ± 0.2

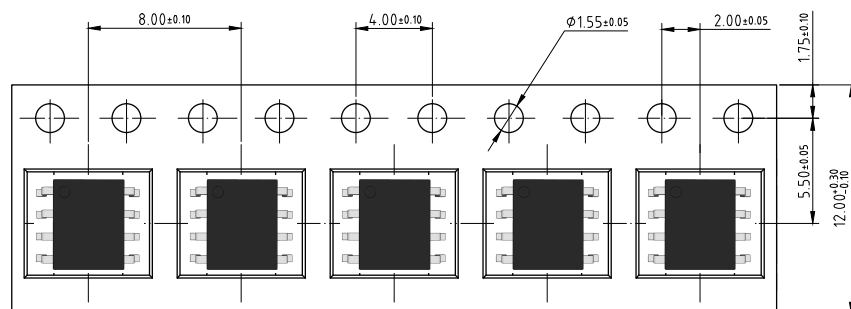

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Pingjingsemi](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#)
[WMJ80N60C4](#) [BXP2N20L](#) [BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTGR](#) [DMNH15H110SK3-13](#)
[SLF10N65ABV2](#) [BSO203SP](#) [BSO211P](#) [IPA60R230P6](#)