


TL431-YK
TL431A-YK
TL431B-YK
Programmable Precision Reference

Features

- Low dynamic output impedance.
- Sink current capability of 1.0 to 100mA.
- Low output noise voltage
- Fast turn on response

SOT-23



1. Reference 2.Cathode 3.Anode

Application


- It provides very wide applications, including shunt regulator, series regulator, switching regulator, voltage reference and others.

Marking Code:

TL431: 431

TL431A: 431A

TL431B: 431B

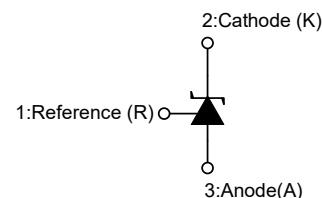


Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

Parameter	Symbol	Value	Units
Cathode Voltage	V _{KA}	37	V
Cathode Current Range(Continuous)	I _{KA}	-100 ~ +150	mA
Reference Input Current Range	I _{REF}	-0.05 ~ +10	mA
Maximum Power Dissipation	P _D	350	mW
Operating Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{STG}	-65 ~ +150	°C

Recommended Operating Conditions

Parameter	Symbol	Min.	Max.	Units
Cathode Voltage	V _{KA}	V _{REF}	36	V
Cathode Current	I _{KA}	1	100	mA
Operating Ambient Temperature Range	T _{OPR}	0	70	°C



TL431-YK
TL431A-YK
TL431B-YK
Programmable Precision Reference

Electrical Characteristics (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test Conditions		Min.	Typ.	Max.	Unit
Reference Input Voltage ^{Fig1}	V _{REF}	V _{KA} =V _{REF} , I _{KA} =10mA	TL431(1%)	2.47	2.495	2.52	V
			TL431A(0.5%)	2.483	2.495	2.507	V
			TL431B(0.4%)	2.485	2.495	2.505	V
Deviation of Reference Input Voltage Over Temperature ^{Fig1}	ΔV _{REF}	V _{KA} =V _{REF} , I _{KA} =10mA 0°C ≤ T _A ≤+70°C		--	4.5	17	mV
Ratio of Change in Reference Input Voltage to The Change in Cathode Voltage ^{Fig2}	ΔV _{REF} / ΔV _{KA}	I _{KA} =10mA	ΔV _{KA} =10V~V _{REF}	--	-1.0	-2.7	mV/V
			ΔV _{KA} =36V~10V	--	-0.5	-2.0	
Reference Input Current ^{Fig2}	I _{REF}	I _{KA} =10mA, R ₁ =10KΩ, R ₂ =∞		--	0.7	4	μA
Deviation of Reference Input Current Over Full Temperature Range ^{Fig2}	ΔI _{REF}	I _{KA} =10mA, R ₁ =10KΩ, R ₂ =∞		--	0.4	1.2	μA
Minimum Cathode Current for Regulation ^{Fig1}	I _{KA(MIN)}	V _{KA} =V _{REF}		--	0.45	1	mA
Off-State Cathode Current ^{Fig3}	I _{KA(OFF)}	V _{KA} =36V, V _{REF} =0		--	0.17	1.0	μA
Dynamic Impedance	Z _{KA}	V _{KA} =V _{REF} , I _{KA} =1~100mA, f≤1.0KHz		--	0.27	0.5	Ω

Figure 1. Test Circuit for V_{KA} = V_{REF}




Figure 2. Test Circuit for V_{KA} > V_{REF}









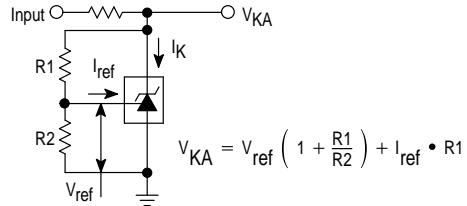



Figure 3. Test Circuit for I_{OFF}

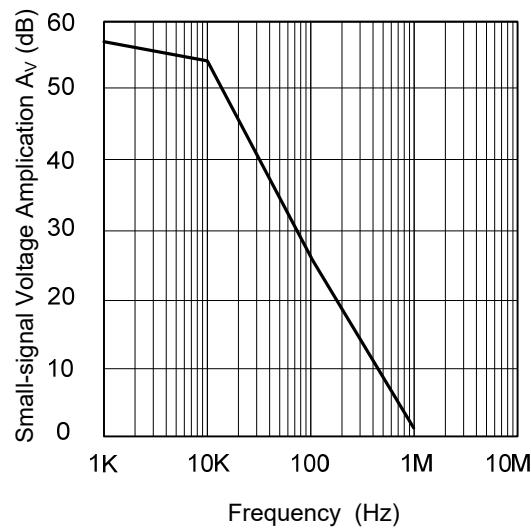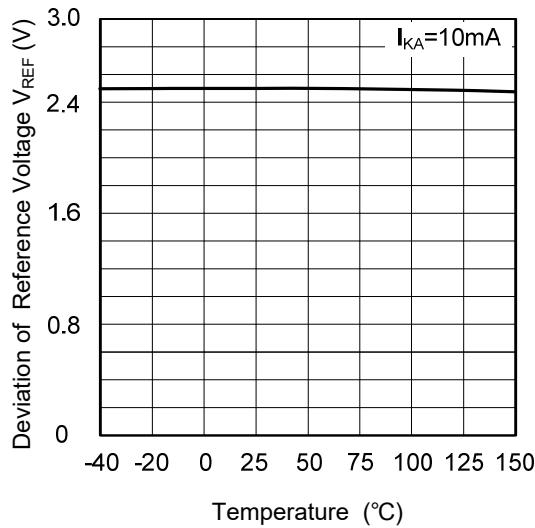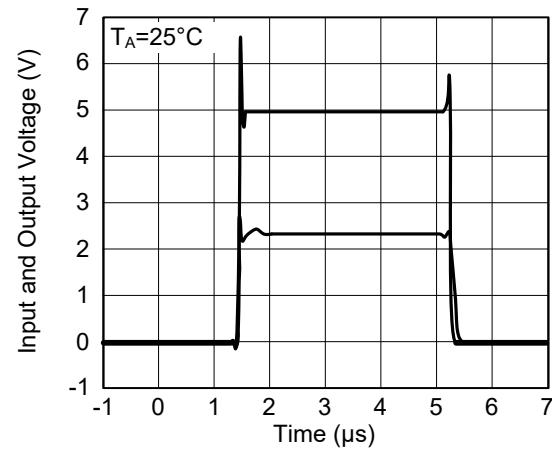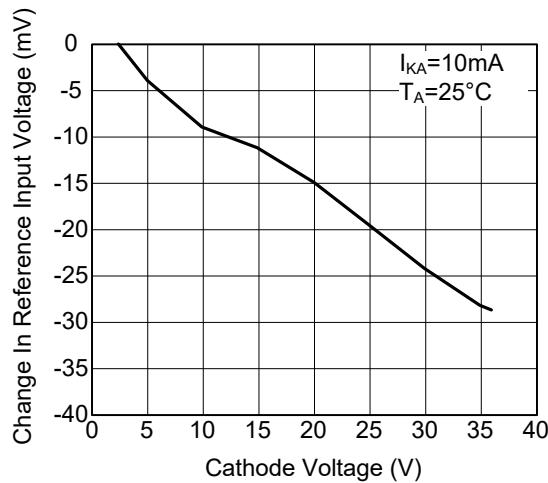

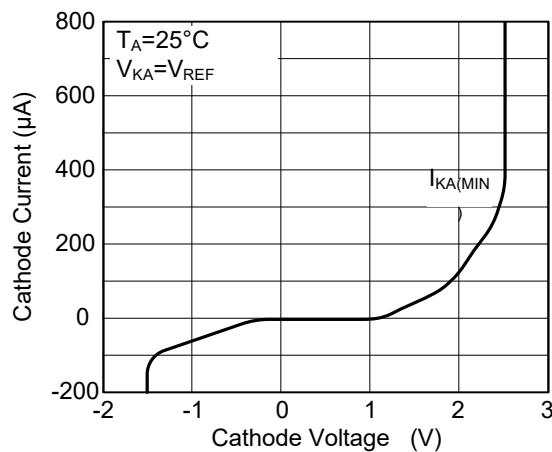

Typical Characteristic Curves




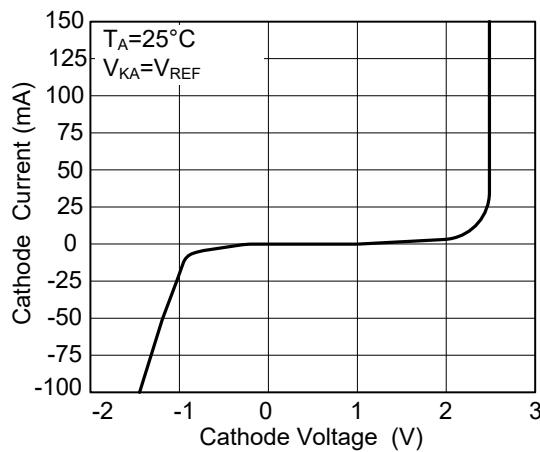




Package Outline

SOT-23

Dimensions in mm

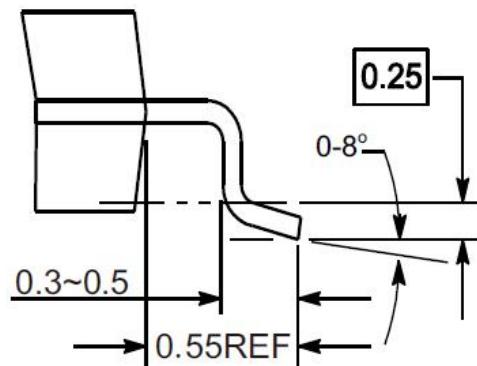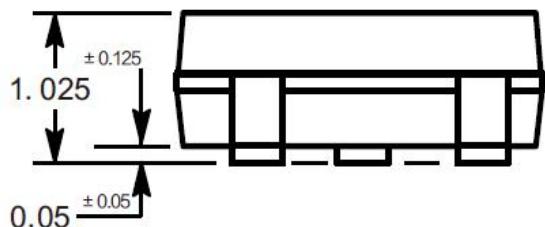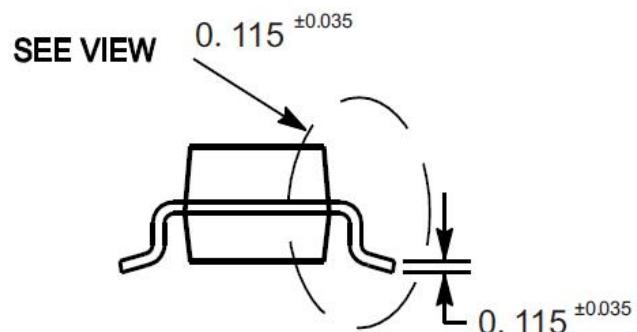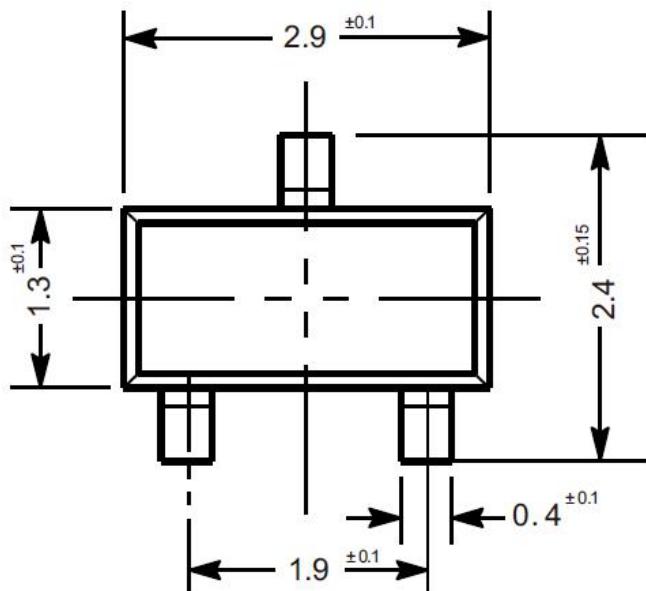

Ordering Information

Device	Package	Shipping
TL431/A/B-YK	SOT-23	3,000PCS/Reel&7inches

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Voltage References](#) category:

Click to view products by [Pingjingsemi](#) manufacturer:

Other Similar products are found below :

[5962-8686103XC](#) [LT1460GIZ-5PBF](#) [LT1009IZPBF](#) [NCV431BVDMR2G](#) [REF01J/883](#) [SC431ILPRAG](#) [AP432AQG-7](#) [LM4040B25QFTA](#)
[TL431BL3T](#) [BR431M](#) [MC1403BM/TR](#) [HT431BRZ](#) [ME4315AM6G-2](#) [ME4315AM6G-1](#) [TL431A-YK](#) [TL431](#) [TL431-1](#) [TL431](#) [TL431S](#)
[TL431](#) [XC6206P332MR](#) [HT431CRZ](#) [LM285M-1.2/TR](#) [S-LR431AKLT1G](#) [LR431AKLT1G](#) [TL431ACZ](#) [ME431ATBG](#) [LM385Z-2.5](#)
[LTL432ATLT1G](#) [LM336Z-2.5](#) [TL431](#) [TP431CS3-1](#) [CBM809MST3](#) [LTL431APTSLT1G](#) [TP431CS3](#) [TL432](#) [TPR3530-S3TR](#) [GN431G](#)
0.3% [TL431ACZ](#) [KA431SLMF2TF](#) [KA431SMF2TF](#) [KA431SMFTF](#) [LM4040QCEM3-3.0/NOPB](#) [LM4041C12ILPR](#) [LM4050AIM3X-](#)
5.0/NOPB [LM4120AIM5-2.5/NOP](#) [LM431SCCMFX](#) [ZXRE250BSA-7](#) [ZXRE125DN8TA](#) [TS3330AQPR](#)