




# PLETRONICS OHA4005-10.0M 7.5x5.5mm SMD OCXO



OHA4 Series  
7.5 x 5.5 x 3.3 mm  
10 Pad SMD Package

## Features

- Ovenized Quartz Crystal High Precision Square Wave Generator
- CMOS
- 3.3V nominal Supply Voltage
- 10.0MHz
- $\pm 20$ ppb -40 to +85°C

## Electrical Characteristics

| Parameter                                   | Min   | Typ  | Max       | Unit   | Condition   |
|---|-------|------|-----------|--------|---|
| Frequency                                   | -     | 10   | -         | MHz    |   |
| Frequency Stability vs Temperature          | -     | -    | $\pm 20$  | ppb    | Fmax-Fmin/2, Temperature change 2°C/minute  |
| Initial Frequency Tolerance                 | -     | -    | $\pm 1.0$ | ppm    | Referenced to 25°C within 30 days of shipment   |
| Frequency Stability vs Supply               | -     | -    | $\pm 5$   | ppb    | $\pm 5\%$ voltage change  |
| Frequency Stability vs Load                 | -     | -    | $\pm 5$   | ppb    | CL $\pm 5\%$  |
| Output Type                                 |       | CMOS |           |        | CL = 15 pF  |
| Warm-up Time                                | -     | -    | 60        | s      | Time until RF output is within $\pm 0.025$ ppm referenced to last frequency reading 1 h after startup |
| Aging                                       | -     | -    | $\pm 3$   | ppb    | per day after 30 days operation at 25°C, 3.3V   |
|   | -     | -    | $\pm 0.3$ | ppm    | per year, after 30 days operation at 25°C, 3.3V   |
| Operating Temperature Range                 | -40   | -    | +85       | °C     | Rate of change for stability specification is $\leq \pm 2^\circ\text{C}/\text{minute}$                |
| Operable Temperature Range                  | -40   | -    | +105      | °C     |   |
| Supply Voltage <sup>1</sup> V <sub>CC</sub> | 3.135 | 3.3  | 3.465     | V      |   |
| Input Current - Turn-on                     | -     | -    | 600       | mA     | @ 25°C, 3.3V  |
| Input Current - Steady State                | -     | -    | 230       | mA     | @ 25°C, 3.3V  |
| Phase Noise                                 |       |      |           |        |   |
| 1 Hz  |       | -72  |           |        |   |
| 10 Hz                                       |       | -110 |           |        |   |
| 100 Hz                                      |       | -143 |           |        |   |
| 1 kHz                                       | -     | -158 | -         | dBc/Hz |   |
| 10 kHz                                      |       | -163 |           |        |   |
| 100 kHz                                     |       | -164 |           |        |   |
| 1 MHz                                       |       | -165 |           |        |   |
| Storage Temperature Range                   | -55   | -    | +105      | °C     |   |

## HCMOS

| Parameter       | Min        | Typ | Max | Unit | Condition                               |
|-----------------|------------|-----|-----|------|---|
| Output Waveform | Squarewave |     |     |      |   |
| "1" Level       | 2.4        | -   | -   | V    |   |
| "0" Level       | -          | -   | 0.4 | V    |   |
| Load            | -          | 15  | -   | pF   |   |
| Duty Cycle      | 45         | 50  | 55  | %    | @0.5V <sub>CC</sub>                     |
| Raise/Fall Time | -          | -   | 6   | ns   | @0.1V <sub>CC</sub> ~0.9V <sub>CC</sub> |

Note: <sup>1</sup> Place a 10nF power supply bypass capacitor next to device for correct operation



### Device Marking

P10.00M  
• YMDDxxx

P = Pletronics  
 10.00M = Frequency (M = MHz)  
 YMD = Date code (Year-Month-Day: See Table below)  
 D = Internal Code  
 S/N: xxx = Serial number

\* A unique number is assigned for your exact specifications.  
 Specifications such as part number, frequency stability, supply voltage and operating temperature range, etc. are not identified from marking.  
 External packaging labels and packing list will correctly identify the ordered Pletronics part number.

Codes for Date Code YMD (Year Month Day)

| Code | 3    | 4    | 5    | 6    | 7    | Code  | A   | B   | C   | D   | E   | F   | G   | H   | J   | K   | L   | M   |
|------|------|------|------|------|------|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Year | 2023 | 2024 | 2025 | 2026 | 2027 | Month | JAN | FEB | MAR | APR | MAY | JUN | JUL | AUG | SEP | OCT | NOV | DEC |

| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A  | B  | C  | D  | E  | F  | G  | H  | J  | K  | L  | M  | N  | P  | R  | T  | U  | V  | W  | X  | Y  | Z  |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Day  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |

### Environmental / ESD Ratings



| Parameter        | Ref Standard            | Condition   |
|------------------|-------------------------|---|
| Solderability    | MIL-STD-202, Method 208 |   |
| Mechanical Shock | IEC 60068-2-27          | 100g, 6ms, half sine wave (3 times for each 3 directions X, Y, Z)                                 |
| Vibration        | IEC 60068-2-6           | 10 ~ 2000Hz, 0.75mm, 10g; 1 cycle 30 minutes, test 2 hours. 3 times for each 3 directions X, Y, Z |

| Model            | Voltage                 |                   |
|------------------|-------------------------|-------------------|
| Human Body Model | Class 2: 2000V ~ <4000V | JEDEC JS-001-2010 |
| Machine Model    | Class B: 200V ~ 400V    | JESD22-A115C      |

**Pletronics Inc. certifies this device is in accordance with the RoHS and REACH directives.**

Pletronics Inc. guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's  
 Moisture Sensitivity Level: 3 As defined in J-STD-020D  
 Second Level Interconnect code: e4  
 Product Weight: 0.153g


### Mechanical Dimensions

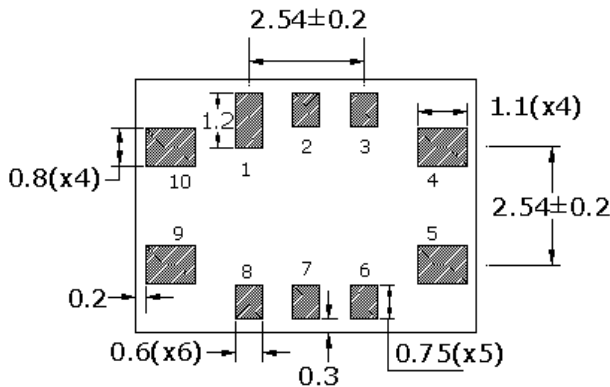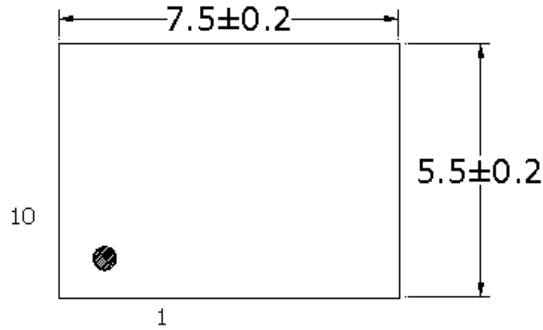

Pad reference numbers not marked on device

### Dimensions in mm

| Pin Connections |                  |
|-----------------|------------------|
| PIN             | FUNCTION         |
| 1,2,3,6,7,8     | No Connect       |
| 4               | GND              |
| 5               | Output           |
| 9               | Vcc              |
| 10              | No Connect or Vc |

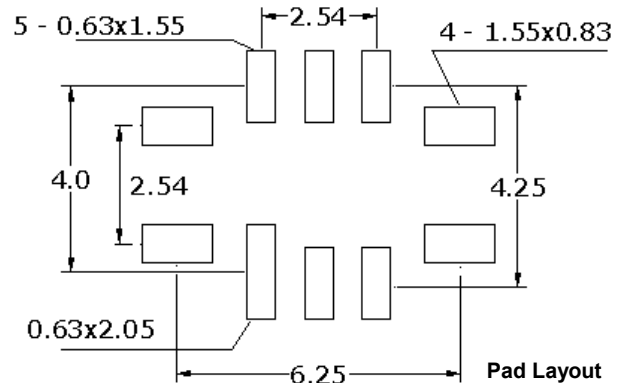

### Pad Layout

Disclaimer: Recommended layout shown. Adjust layout as needed for individual process requirements.

Contacts (pads): ENIG


For Optimum Jitter Performance, Pletronics recommends:

- A ground plane under the device
- Do not route large transient signals (both current and voltage) under the device
- Do not place near a large magnetic field such as a high frequency switching power supply
- Do not place near piezoelectric buzzers or mechanical fans
- Minimize air flow across the device

### Pad Layout

Disclaimer: Recommended layout shown. Adjust layout as needed for individual process requirements.



### Reflow

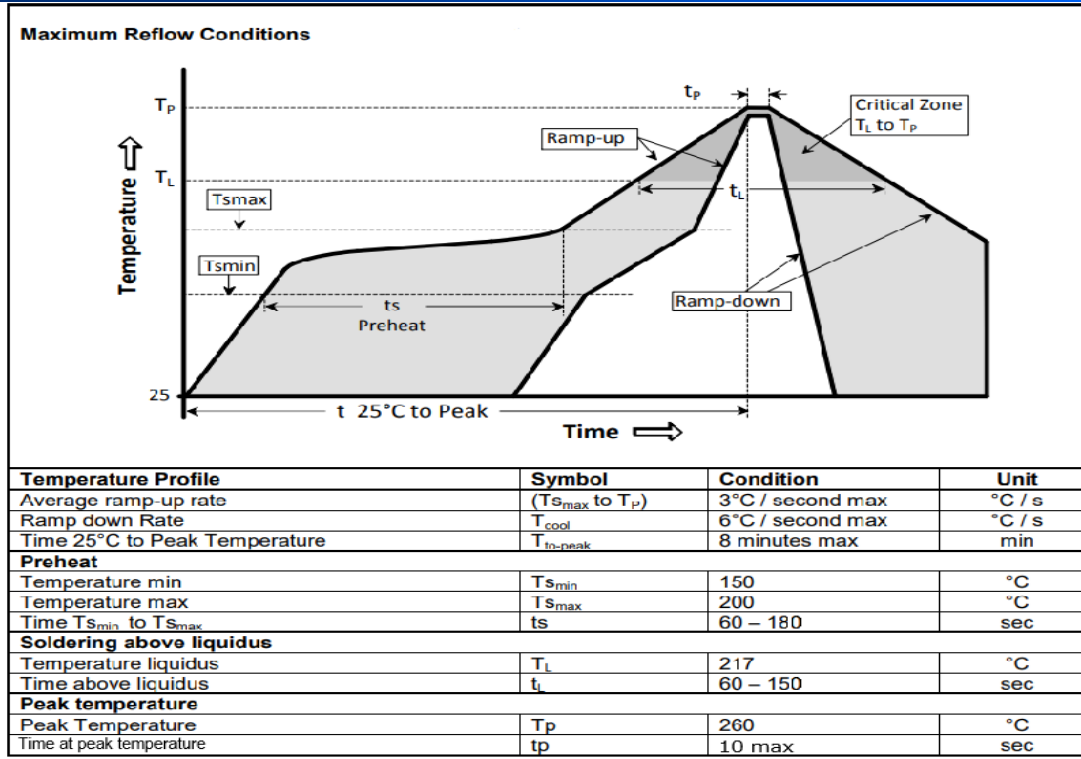

The part may be reflowed 2 times without degradation (typical for lead free processing).  
**NO AQUEOUS WASHING**

### Tape and Reel

Tape and Reel available for quantities of 250 to 1000 per reel, cut tape for < 250. 16mm tape, 8mm pitch.

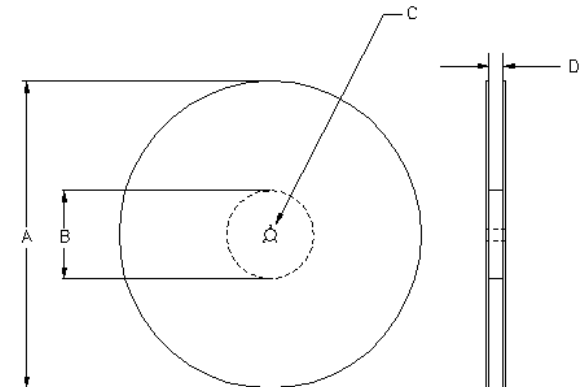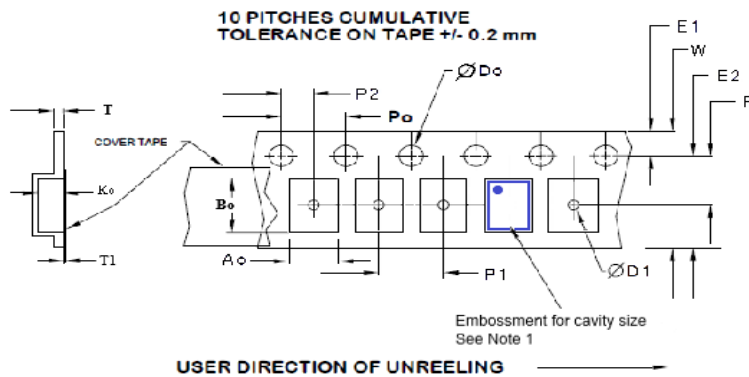

Tape Variable Dimensions Table 2

| Part Size | Tape Size | E2 typ | F         | P1       | W max | Ao       | Bo       | Ko       | Qty/reel standard |
|-----------|-----------|--------|-----------|----------|-------|----------|----------|----------|-------------------|
| 7050      | 16mm      | 14.25  | 7.5 ±0.05 | 8.0 ±0.1 | 16.3  | 6.0 ±0.2 | 8.0 ±0.2 | 4.0 ±0.2 | 1K                |

Dimensions in mm Drawings Not to scale  
Note 1: Embossed cavity to conform to EIA- 481-B

Tape Constant Dimensions Table 1

| Tape Size | Do            | D1 typ | E1        | Po       | P2       | T typ | T1 max |
|-----------|---------------|--------|-----------|----------|----------|-------|--------|
| 16mm      | 1.5 +0.1 -0.0 | 1.5    | 1.75 ±0.1 | 4.0 ±0.1 | 2.0 ±0.1 | 0.3   | 0.1    |

Reel Dimensions (1Kpcs) Table 3

| Reel Size | A      |     | B      |      | C              | D                        |
|-----------|--------|-----|--------|------|----------------|--------------------------|
|           | Inches | mm  | Inches | mm   | mm             | mm                       |
| 13        | 13.0   | 330 | 3.75   | 95.3 | 13.0 +0.5 -0.2 | Tape size +0.4 +2.0 -0.0 |



## Important Notice

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, weapons, weapon systems or space applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

### Contacting Pletronics Inc.

Pletronics, Inc.  
19013 36th Ave. West  
Lynnwood, WA 98036-5761  
U.S.A.

Tel: 425.776.1880  
Fax: 425.776.2760  
email: [ple-sales@pletronics.com](mailto:ple-sales@pletronics.com)  
URL: [www.pletronics.com](http://www.pletronics.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [OCXO Oscillators](#) category:*

*Click to view products by [Pletronics](#) manufacturer:*

Other Similar products are found below :

[AOCTQ5-V-10.000MHz-I3-SW](#) [AOCTQ5-V-10.000MHz-M10](#) [KOVSG40MDBCBA](#)T [KOVTE10MDBBACB](#) [KOVTL20MDBCCCB](#)  
[KOVSG10MDBCBCBCT](#) [KOVTL10MDBEACB](#) [KOVTL100MDBEACB](#) [KOVSL10MDBCBCCT](#) [KOVSG20MDBCCCT](#)  
[KOVSG10MDBDCCT](#) [KOVSL20MDBCCCT](#) [KOVTL40MDBFBCB](#) [KOVSG10MDBBACT](#) [SiT5711AI-KW-33E-40.000000F](#)  
[KOVSG20MDBDCCT](#) [SIT8102AC12-33E-98.30400Y](#) [8208AI23-33E26.000](#) [LFRBXO059244Bulk](#) [AOCJY-100.000MHZ-SW](#)  
[LFOCXO065520Bulk](#) [AOCJY-12.800MHZ](#) [AOCJY3B-10.000MHz-E-SW](#) [AOCJY4A-10.000MHz-SW](#) [AOCJY2A-100.000MHz-E](#)  
[AOCJY3-10.000MHz-E-SW](#) [AOCJY3A-10.000MHz](#) [AP3S1-108.000MHZ-ER](#) [AOC1409XAUC-20.0000C](#) [AOC2012VAJC-10.0000C](#)  
[AOC2012VAJC-12.8000C](#) [AOC2012VAJC-19.4400C](#) [AOC2012VAJC-25.0000C](#) [AOC2012XAJC-10.0000C](#) [AOC2012XAJC-12.8000C](#)  
[AOC2012XAJC-19.4400C](#) [AOC2012XAJC-25.0000C](#) [AOC2522BVAUC-10.0000](#) [AOCJY-100.000MHZ](#) [AOCJY-100.000MHz-E](#) [AOCJY-](#)  
[10.000MHz](#) [AOCJY-10.000MHz-E](#) [AOCJY-10.000MHz-F](#) [AOCJY1-10.000MHZ](#) [AOCJY1-10.000MHz-E-SW](#) [AOCJY1-40.000MHz-E](#)  
[AOCJY1A-100.000MHz](#) [AOCJY1A-10.000MHz](#) [AOCJY-20.000MHz](#) [AOCJY-20.000MHZ-F](#)