

## TVS Diode – ASMDJ Series

### Features

- Plastic package, excellent insulation strength.
- Glass passivated chip junction in SMC package.
- Excellent voltage clamping capability.
- Automotive grade AEC-Q101 qualified.
- Low Zener impedance.
- 3000W peak pulse power capability on 10/1000 $\mu$ s waveform.
- Typical leakage current less than 1 $\mu$ A above 13V.
- Very fast response time, typically less than 1.0ps from 0 volt to  $V_{BR}$  minimum.
- High temperature soldering guaranteed: 265°C/10 sec.
- MSL: JEDEC-J-STD-020, Level 1




### Applications

- I/O interface,  $V_{CC}$  bus
- Telecom / Automotive
- Industrial and consumer electronic applications.
- Relay and electromagnetic valve surge absorption.

### Agency Approval

- UL certification pending

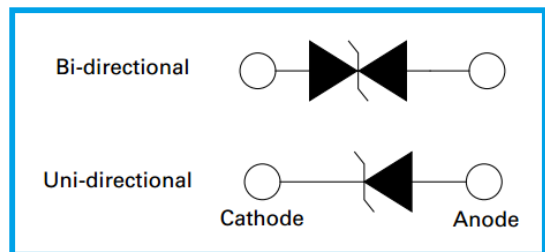

### Mechanical and Physical Data

- Case: JEDEC SMC molded plastic.
- Axial leaded, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denoted cathode except bidirectional.

### Maximum Ratings and Thermal Characteristics


Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation on 10/1000 $\mu$ s waveform (Note 1, Fig.1).	$P_{PPM}$	Min 3000	Watt
Peak Pulse Current of 10/1000 $\mu$ s waveform (Note 1, Fig.3).	$I_{PPM}$	See Table	Amp
Steady State Power Dissipation at $T_L = 75^\circ\text{C}$ , Lead lengths 0.375", (9.5mm) (Fig.5).	$P_{M(AV)}$	6.5	Watt
Peak Forward Surge Current, 8.3 ms Single Half Sine Wave Superimposed on Rated Load (Note 2, Fig.6).	$I_{FSM}$	300	Amp
Operating Junction and Storage Temperature Range.	$T_J, T_{STG}$	-55~150	$^\circ\text{C}$

Note:

1. Non-repetitive current pulse, per Fig.3 and derated above  $T_A = 25^\circ\text{C}$  per Fig.2.
2. 8.3ms single half sine wave, or equivalent square wave, Duty cycle = 4 pulses per minutes maximum.

### Part Number Code


ASMDJ □□□ CA - □□□

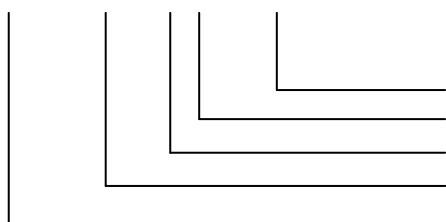

- Packaging Code (T13: Tape with 13" Reel; T7: Tape with 7")
- $V_{BR}$  Voltage tolerance (A: 5%; Blank: 10%)
- C: Bi-directional; Blank: Uni-directional
- Reverse Stand-Off Voltage or Typical Breakdown Voltage
- Automotive ASMDJ Series (3000W)

## TVS Diode – ASMDJ Series

### I-V Curve Characteristics

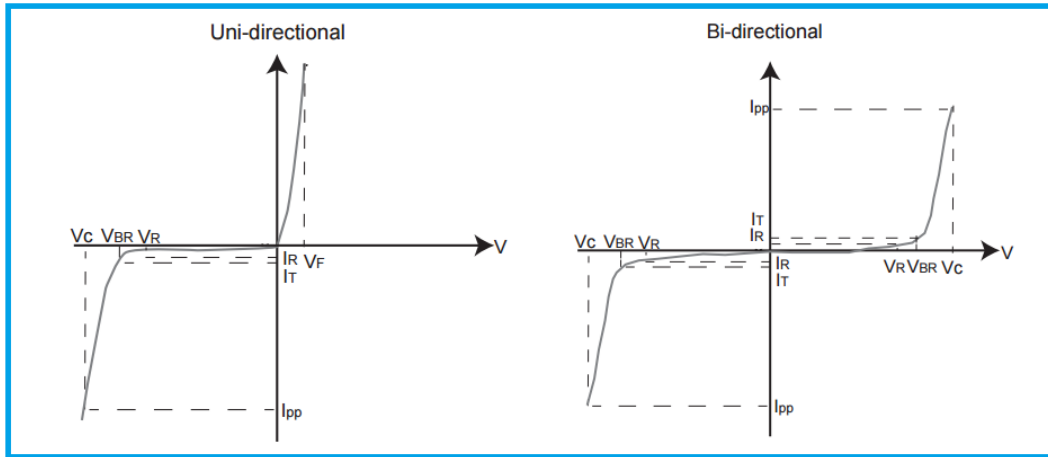

- $P_{PPM}$  Peak Pulse Power Dissipation – Maximum power dissipation
- $V_R$  Stand-off Voltage – Maximum voltage that can be applied to the TVS without operation
- $V_{BR}$  Breakdown Voltage – Maximum voltage that flows through the TVS at a specified test current ( $I_T$ )
- $V_C$  Clamping Voltage – Peak voltage measured across the TVS at a specified  $I_{PPM}$  (Peak Impulse Current)
- $I_{R}$  Reverse Leakage Current – Current measured at  $V_R$
- $V_F$  Forward Voltage Drop for Uni-directional

### Electrical Characteristics

Part Number		Marking		Reverse Stand Off Voltage $V_R$ (V)	Breakdown Voltage $V_{BR}$ (V) @ $I_T$		Test Current $I_T$ (mA)	Maximum Clamping Voltage $V_C$ (V) @ $I_{PP}$	Maximum Peak Pulse Current $I_{PP}$ (A)	Maximum Reverse Leakage $I_R$ ( $\mu$ A) @ $V_R$	UL
Uni	Bi	Uni	Bi		Min.	Max.					
ASMDJ10A	ASMDJ10CA	PDXA	DDXA	10.0	11.1	12.3	5	17.0	176.5	15	Pending
ASMDJ11A	ASMDJ11CA	PDZA	DDZA	11.0	12.2	13.5	5	18.2	164.8	2	Pending
ASMDJ12A	ASMDJ12CA	PEEA	DEEA	12.0	13.3	14.7	5	19.9	150.8	2	Pending
ASMDJ13A	ASMDJ13CA	PEGA	DEGA	13.0	14.4	15.9	5	21.5	139.5	2	Pending
ASMDJ14A	ASMDJ14CA	PEKA	DEKA	14.0	15.6	17.2	5	23.2	129.3	2	Pending
ASMDJ15A	ASMDJ15CA	PEMA	DEMA	15.0	16.7	18.5	5	24.4	123.0	2	Pending
ASMDJ16A	ASMDJ16CA	PEPA	DEPA	16.0	17.8	19.7	5	26.0	115.4	2	Pending
ASMDJ17A	ASMDJ17CA	PERA	DERA	17.0	18.9	20.9	5	27.6	108.7	2	Pending
ASMDJ18A	ASMDJ18CA	PETA	DETA	18.0	20.0	22.1	5	29.2	102.7	2	Pending
ASMDJ19A	ASMDJ19CA	PEBA	DEBA	19.0	21.1	23.3	5	30.8	97.5	2	Pending
ASMDJ20A	ASMDJ20CA	PEVA	DEVA	20.0	22.2	24.5	5	32.4	92.6	2	Pending
ASMDJ22A	ASMDJ22CA	PEXA	DEXA	22.0	24.4	26.9	5	35.5	84.5	2	Pending
ASMDJ24A	ASMDJ24CA	PEZA	DEZA	24.0	26.7	29.5	5	38.9	77.1	2	Pending
ASMDJ26A	ASMDJ26CA	PFEA	DFEA	26.0	28.9	31.9	5	42.1	71.3	2	Pending
ASMDJ28A	ASMDJ28CA	PFGA	DFGA	28.0	31.1	34.4	5	45.4	66.1	2	Pending
ASMDJ30A	ASMDJ30CA	PFGA	DFGA	30.0	33.3	36.8	5	48.4	62.0	2	Pending
ASMDJ33A	ASMDJ33CA	PFMA	DFMA	33.0	36.7	40.6	5	53.3	56.3	2	Pending
ASMDJ36A	ASMDJ36CA	PFFA	DFPA	36.0	40.0	44.2	5	58.1	51.6	2	Pending
ASMDJ40A	ASMDJ40CA	PFRA	DFRA	40.0	44.4	49.1	5	64.5	46.5	2	Pending
ASMDJ43A	ASMDJ43CA	PFTA	DFTA	43.0	47.8	52.8	5	69.4	43.2	2	Pending


Note:

- For bi-directional type having  $V_R$  of 10 volts and less, the  $I_R$  limit is double.


## TVS Diode – ASMDJ Series

### Ratings and Characteristic Curves


**Fig 1 - Peak Pulse Power Rating Curve**

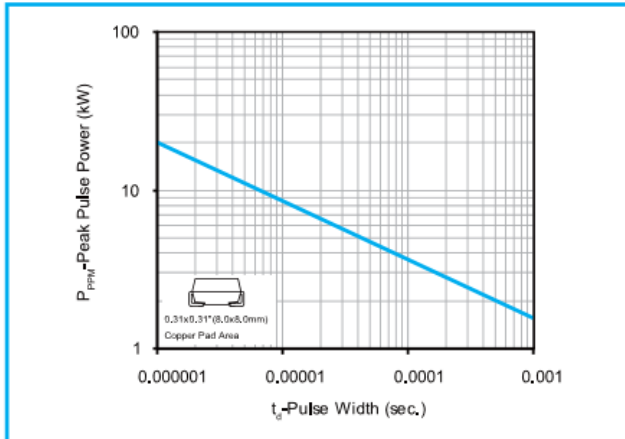


**Fig 2 - Pulse Derating Curve**

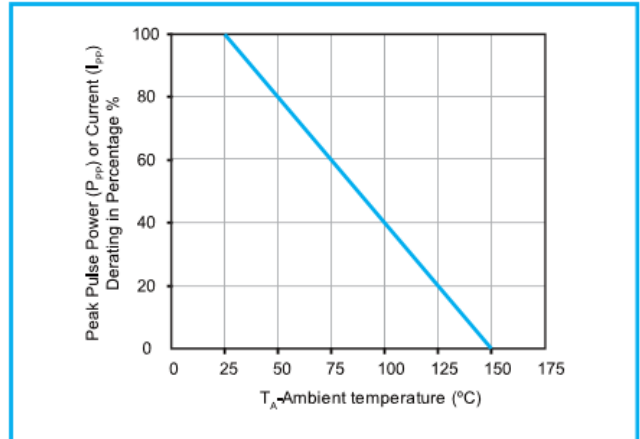


**Fig 3 - Pulse Waveform**

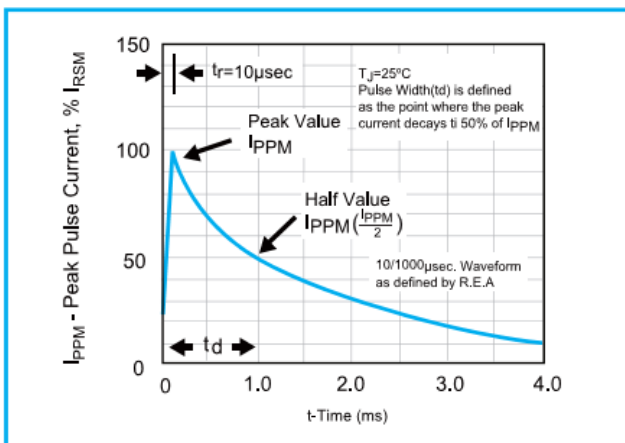


**Fig 4 - Typical Junction Capacitance Uni-directional**

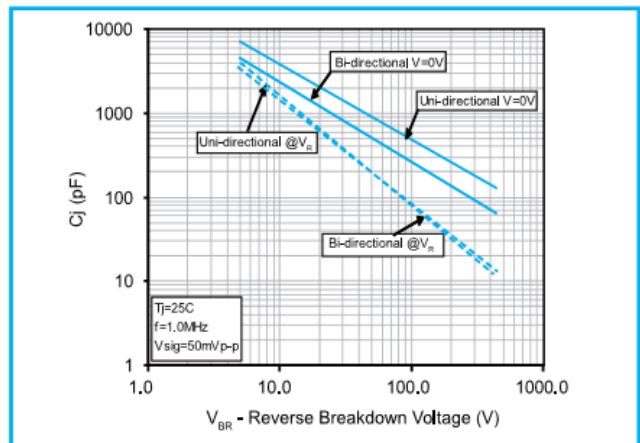

**Fig 5 - Steady State Power Dissipation Derating Curve**

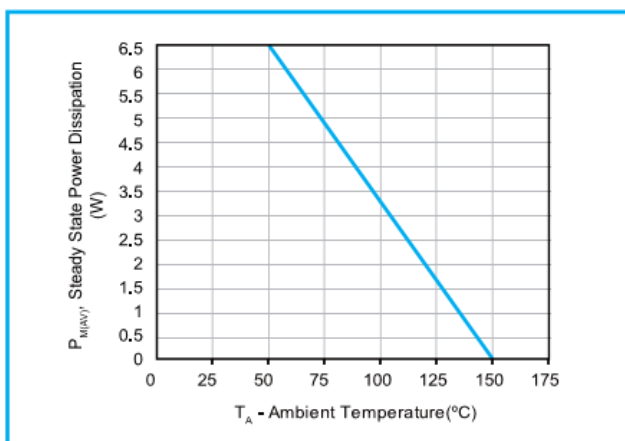


**Fig 6 - Maximum Non-Repetitive Forward Surge Current (Uni-directional Only)**

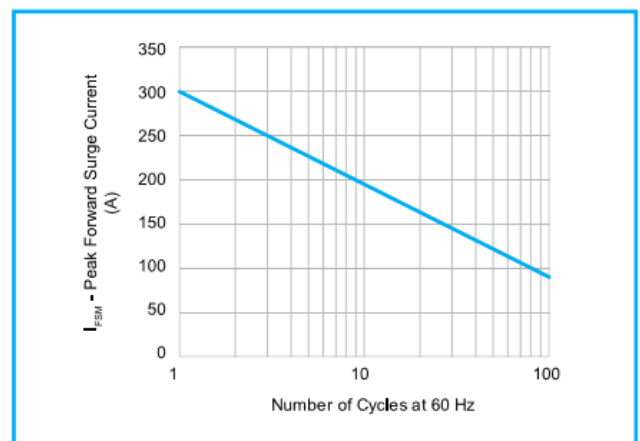


## TVS Diode – ASMDJ Series

### Marking Definitions

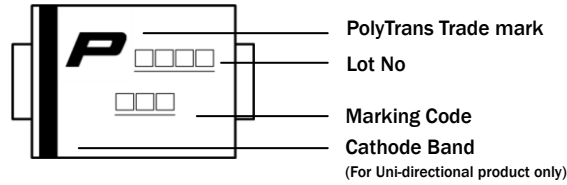


### Physical Dimensions

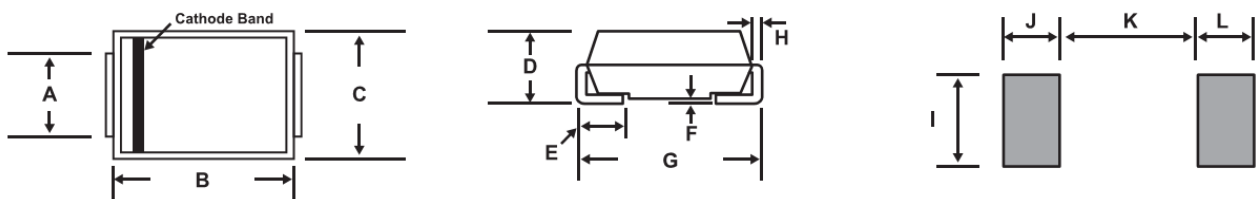

Dimension	Millimeters		Inches	
	Min	Max	Min	Max
A	2.90	3.20	0.114	0.126
B	6.60	7.11	0.260	0.280
C	5.59	6.22	0.220	0.245
D	2.20	2.80	0.087	0.110
E	0.76	1.52	0.030	0.060
F	-	0.20	-	0.008
G	7.75	8.13	0.305	0.320
H	0.15	0.31	0.006	0.012
I	3.30	-	0.129	-
J	2.40	-	0.094	-
K	-	4.20	-	0.165
L	2.40	-	0.094	-

### Lead Free Reflow Soldering Recommendations

Preheat	
- Temperature Min ( $T_{s\_min}$ )	150°C
- Temperature Max ( $T_{s\_max}$ )	200°C
- Time ( $T_{s\_min}$ to $T_{s\_max}$ )	60-180 seconds
- Average Ramp-Up Rate	1~3°C/second
Peak Temperature	260°C max.
Time within 5°C of actual Peak Temperature ( $t_p$ )	40 seconds max.
Ramp-Down Rate	6 °C /second max.

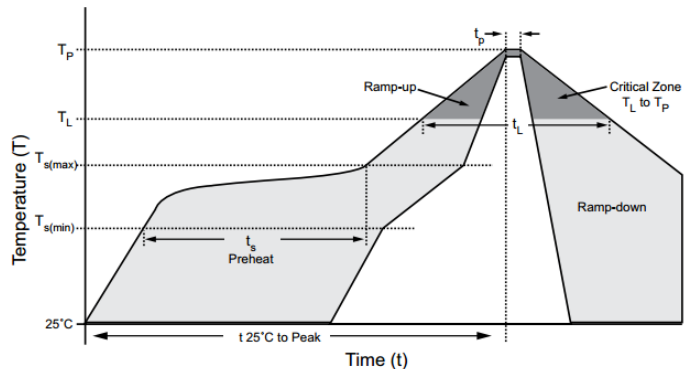


Note: If the soldering temperatures exceed the recommended profile, devices may not meet the performance requirements.

## TVS Diode – ASMDJ Series

### Packaging Information

Part Number	Packaging Code	Component Package	Quantity	Packaging Option	Packaging Specification
ASMDJ Series	T13	D0-214AB	3000	Tape & Reel - 16mm tape/13" reel	EIA STD RS-481
ASMDJ Series	T7	D0-214AB	500	Tape & Reel - 16mm tape/7" reel	EIA STD RS-481

### Tape and Reel Specifications

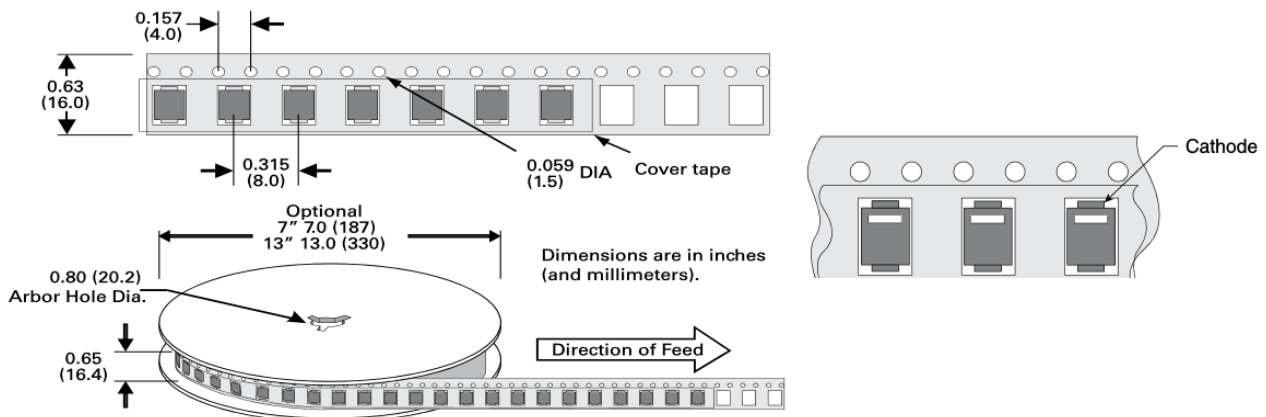

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [Polytronics](#) manufacturer:*

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)  
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)  
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-](#)  
[TP](#) [MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)  
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)  
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)  
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)