


## PE06N41A – ESD Protection Diode

### Feature

- 950 Watts peak pulse power (8/20 $\mu$ s)
- Bidirectional configurations
- Solid state silicon-avalanche technology
- Low clamping voltage
- Low leakage current
- IEC61000-4-2 (ESD)  $\pm 30\text{kV}$  (Air),  $\pm 30\text{kV}$  (Contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)
- IEC61000-4-5 (Lightning): 60A (8/20 $\mu$ s)

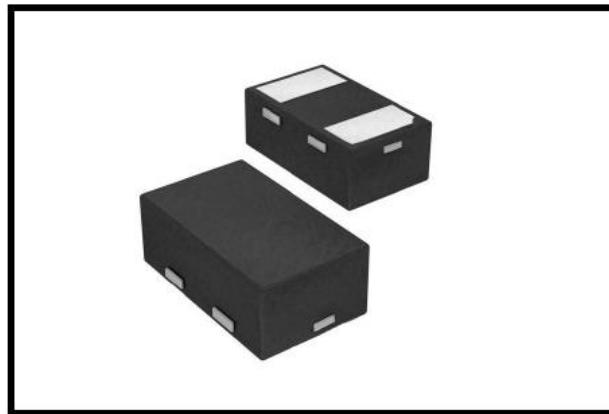


### Applications

- Micro processor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops and Servers
- Portable Instrumentation
- Pagers Peripherals

### Mechanical Data

- DFN1006 package
- Molding compound flammability rating: UL94 V-0
- Tape and Reel Packaging
- RoHS/WEEE Compliant

### Schematic and PIN Configuration

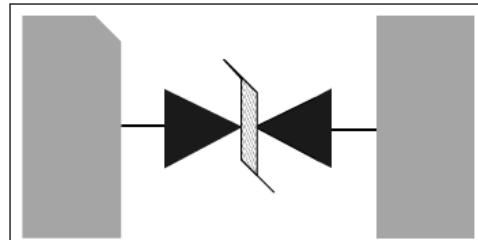

DFN1006

### Maximum Rating

Parameter	Symbol	Limit	Unit
IEC61000-4-2 ESD Voltage – Air Mode	V <sub>ESD</sub> <sup>(1)</sup>	$\pm 30$	kV
IEC61000-4-2 ESD Voltage – Contact Mode		$\pm 30$	
Peak Pulse Power	P <sub>pp</sub> <sup>(2)</sup>	950	W
Peak Pulse Current	I <sub>pp</sub> <sup>(2)</sup>	60	A
Maximum Lead Solder Temperature (10 seconds duration)	T <sub>L</sub>	260	°C
Junction Temperature	T <sub>J</sub>	-55~125	°C
Storage Temperature Range	T <sub>stg</sub>	-55~125	°C

Note:

1. Device stressed with ten non-repetitive ESD pulses.
2. Non-repetitive current pulse 8/20 $\mu$ s exponential decay waveform according to IEC61000-4-5.
3. All ratings are measured at environmental temperature of TA = 25 °C unless otherwise noted.



新竹市科學工業園區工業東四路 24-1 號 No. 24-1 Industry E. Rd. IV, Hsinchu Science Park, Hsinchu 300, Taiwan.  
TEL: +886-3-5643931 FAX: +886-3-5644624 http://www.pttc.com.tw

## PE06N41A – ESD Protection Diode

### Electrical Characteristics


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Stand-off Voltage	$V_{RWM}^{(1)}$				6.3	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T = 1\text{mA}$	7.0			V
Reverse Leakage Current	$I_R$	$V_{RWM} = 6.3\text{V}$			1.0	$\mu\text{A}$
Clamping Voltage	$V_C^{(2)}$	$I_{PP} = 60\text{A}$		16		V
Junction Capacitance	$C_J$	$V_R = 0\text{V}, f = 1\text{MHz}$		200		pF

Note:

1. Other voltages available upon request.
2. Non-repetitive current pulse 8/20 $\mu\text{s}$  exponential decay waveform according to IEC61000-4-5.
3. All ratings are measured at environmental temperature of  $T_A = 25^\circ\text{C}$  unless otherwise noted.

### Electrical Parameters


Symbol	Parameter
$V_C$	Clamping Voltage @ $I_{PP}$
$I_{PP}$	Peak Pulse Current
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{RWM}$	Reverse Stand-off Voltage

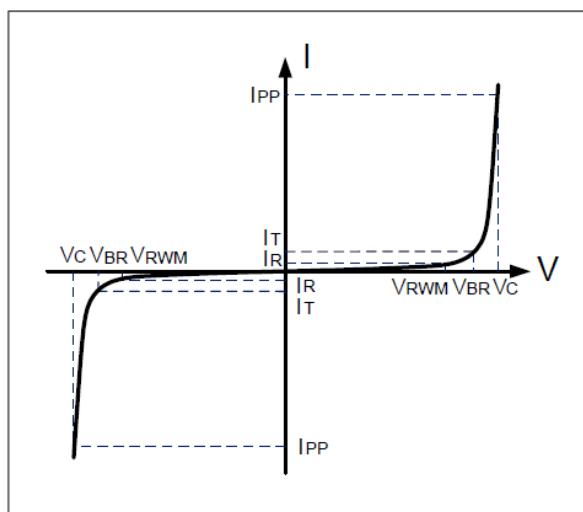


## PE06N41A – ESD Protection Diode

### Typical Characteristics


**Figure 1: Peak Pulse Power vs. Pulse Time**

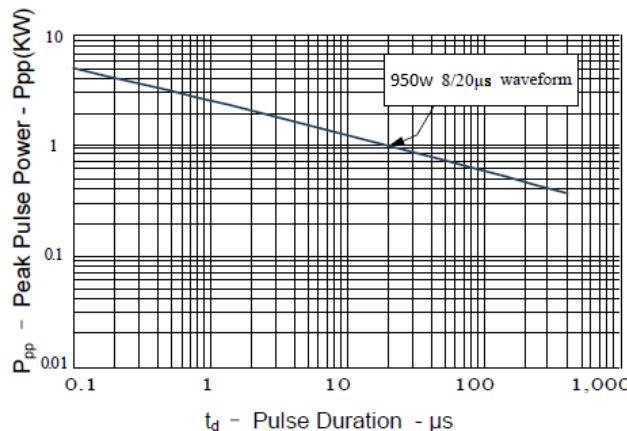


**Figure 2: Power Derating Curve**

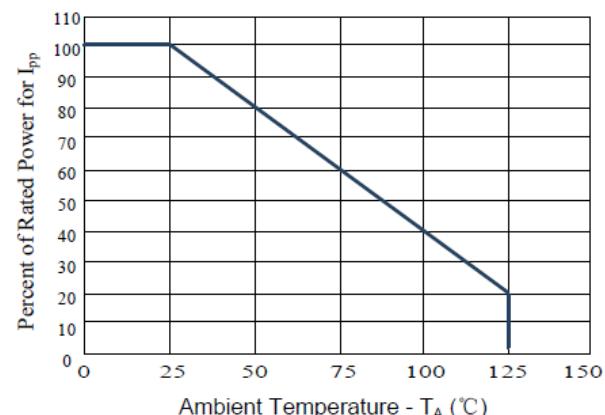

**Figure 3: Pulse Waveform**

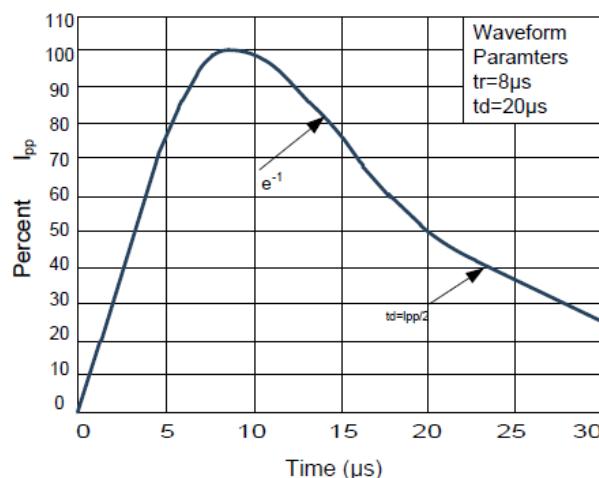


**Figure 4: Clamping Voltage vs.Ipp**

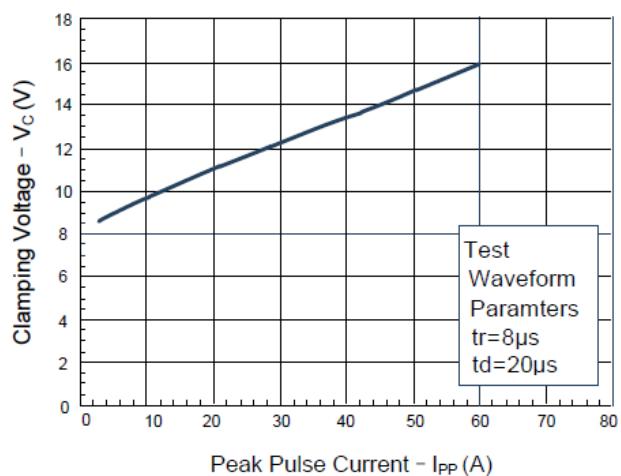

## PE06N41A – ESD Protection Diode

### DFN1006 Package Outline Dimensions

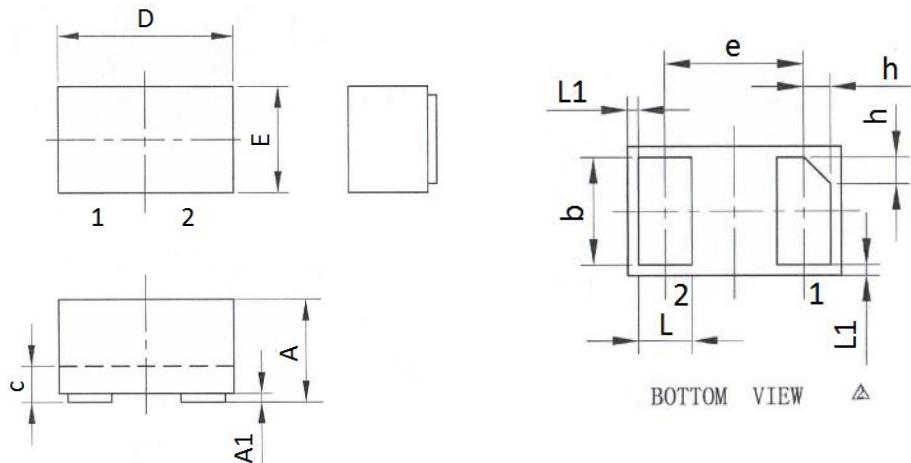

Symbol	Dimensions (mm)		
	Min	Typ	Max
A	0.45	0.50	0.55
A1	0.00	0.02	0.05
b	0.45	0.50	0.55
c	0.12	0.15	0.18
D	0.95	1.00	1.05
e	0.65 BSC		
E	0.55	0.60	0.65
L	0.20	0.25	0.30
L1	0.05 REF		
h	0.07	0.12	0.17

### Marking



### Packaging Information

Order Code	Packaging	Reel Size	PCS/Reel
PE06N41A	DFN1006	7 inch	10,000



新竹市科學工業園區工業東四路 24-1 號 No. 24-1 Industry E. Rd. IV, Hsinchu Science Park, Hsinchu 300, Taiwan.  
TEL: +886-3-5643931 FAX: +886-3-5644624 http://www.pttc.com.tw

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for ESD Suppressors / TVS Diodes category:***

***Click to view products by Polytronics manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD105-B1-02EL](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#)  
[D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [SM1605E3/TR13](#)  
[SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)  
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#) [E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#)