

**PTUC0524PA – ESD Protection Diode**

## Feature

- 30 Watts peak pulse power (8/20 $\mu$ s)
  - Unidirectional configurations
  - Solid state silicon-avalanche technology
  - Low clamping voltage
  - Low leakage current
  - Low capacitance ( $C_o = 0.2\text{pF}$  typ. I/O to I/O)
  - IEC61000-4-2 (ESD)  $\pm 15\text{kV}$  (Air),  $\pm 12\text{kV}$  (Contact)
  - IEC61000-4-4 (EFT) 40A (5/50ns)
  - IEC61000-4-5 (Lightning): 3A (8/20 $\mu$ s)




## Applications

- USB3.0, USB2.0, Ethernet
  - HDMI 2.0, Displayport 1.3, eSATA
  - Unified Display Interface
  - Digital Video Interface
  - High Speed Serial Interface

## Mechanical Data

- Tiny DFN10L(2.5mmx1.0mm) package
  - Molding compound flammability rating: UL94V-0
  - Tape and Reel Packaging
  - RoHS/WEEE Compliant

## Schematic and PIN Configuration

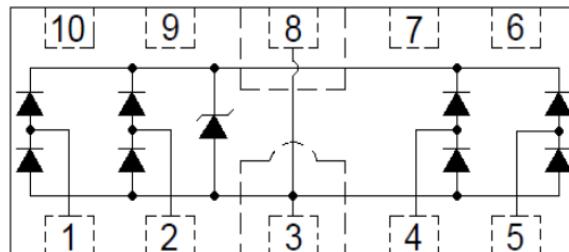

## Maximum Rating

Parameter	Symbol	Value	Unit
IEC61000-4-2 ESD Voltage – Air Mode	$V_{ESD}^{(1)}$	$\pm 15$	kV
IEC61000-4-2 ESD Voltage – Contact Mode		$\pm 12$	
Peak Pulse Power ( tp =8/20μs )	$P_{PP}$	30	W
Peak Pulse Current ( tp =8/20μs ) (note1)	$I_{PP}$	3	A
Lead Solder Temperature (10 seconds duration)	$T_L$	260	°C
Junction Temperature	$T_J$	-55~125	°C
Storage Temperature Range	$T_{stg}$	-55~125	°C

Note:

1. Device stressed with ten non-repetitive ESD pulses.
  2. Non-repetitive current pulse 8/20 $\mu$ s exponential decay waveform according to IEC61000-4-5.
  3. All ratings are measured at environmental temperature of TA = 25°C unless otherwise noted.

## PTUC0524PA – ESD Protection Diode

### Electrical Characteristics


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Stand-off Voltage	$V_{RWM}^{(1)}$				5.0	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T = 1\text{mA}$	6.0	7.2	9.5	V
Reverse Leakage Current	$I_R$	$V_{RWM} = 5\text{V}$		0.02	0.50	$\mu\text{A}$
Clamping Voltage	$V_C^{(2)}$	$I_{PP} = 3\text{A}$		10	11	V
	$V_{CL}$	$I_{PP} = 16\text{A}$ , tp=TLP			15	V
Junction Capacitance	$C_J$	$V_R = 0\text{V}$ , $f = 1\text{MHz}$ , I/O to I/O		0.20		pF
		$V_R = 0\text{V}$ , $f = 1\text{MHz}$ , I/O to GND		0.36		pF

Note:

1. Other voltages available upon request.
2. Non-repetitive current pulse 8/20 $\mu\text{s}$  exponential decay waveform according to IEC61000-4-5.
3. All ratings are measured at environmental temperature of  $T_A = 25^\circ\text{C}$  unless otherwise noted.

### Electrical Parameters


Symbol	Parameter
$V_C$	Clamping Voltage @ $I_{PP}$
$I_{PP}$	Peak Pulse Current
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{RWM}$	Reverse Stand-off Voltage
$V_F$	Forward Voltage @ $I_F$

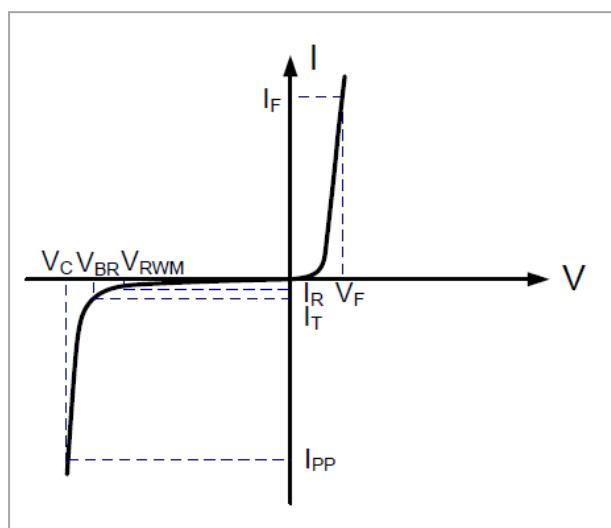


## PTUC0524PA – ESD Protection Diode

### Typical Characteristics


**Fig.1 Peak Pulse Power Rating Curve**

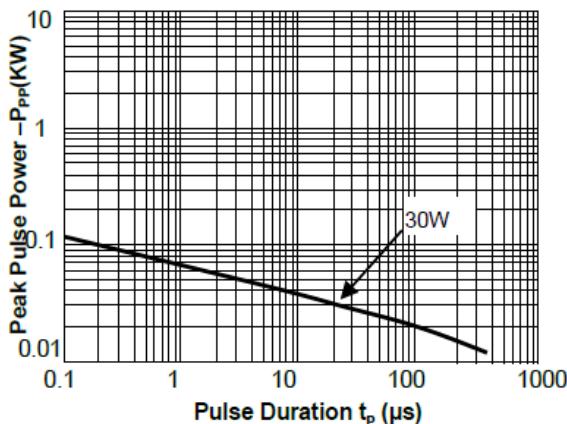


**Fig.2 Pulse Derating Curve**

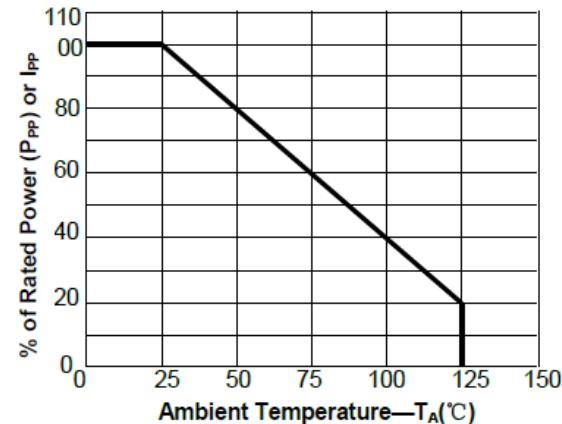


**Fig.3 Pulse Waveform-8/20μs**

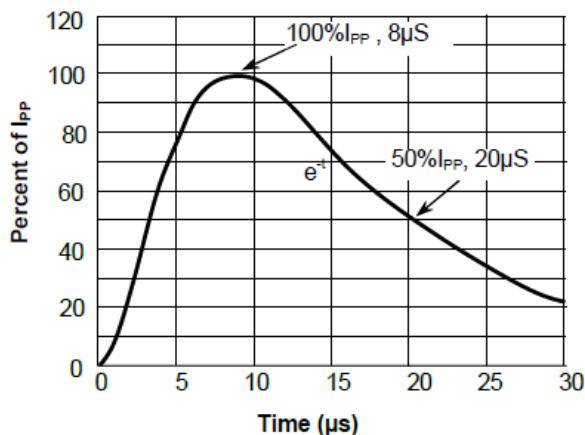


**Fig.4 Pulse Waveform-ESD(IEC61000-4-2)**

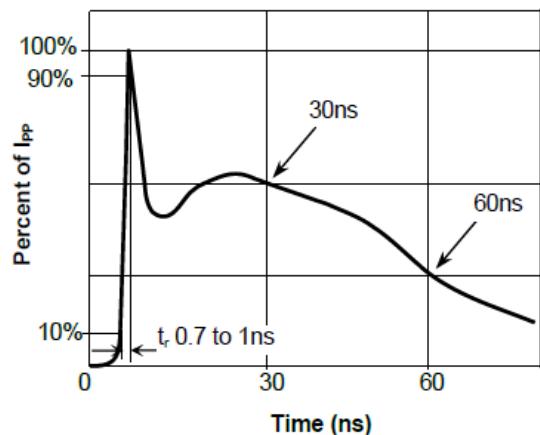

**Figure5: Positive Clamping voltage (TLP)**

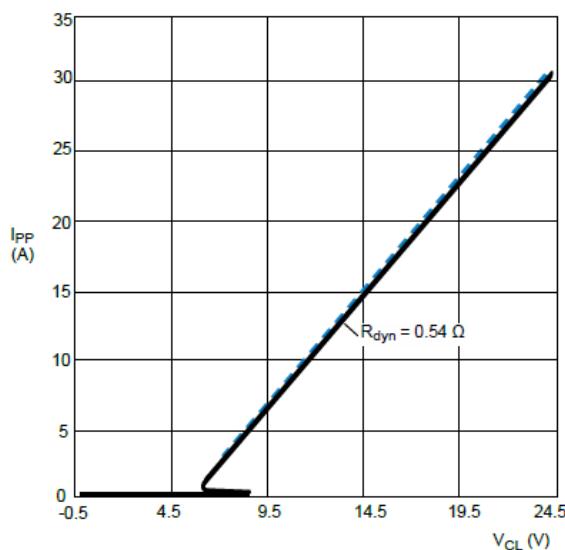


**Figure6: Negative Clamping voltage (TLP)**

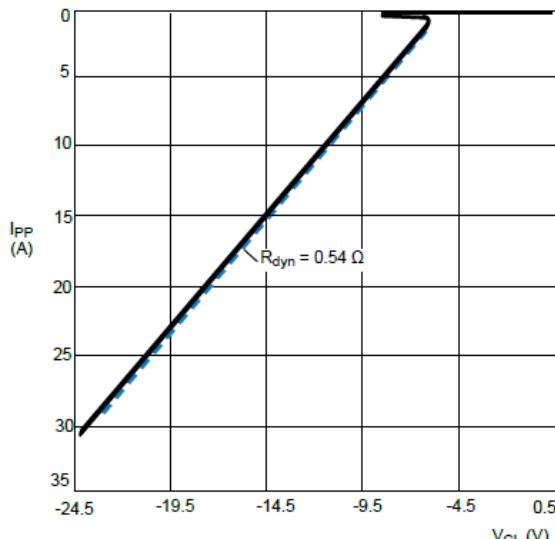

## PTUC0524PA – ESD Protection Diode

### DFN10L(2.5mmx1.0mm) Package Outline Dimensions

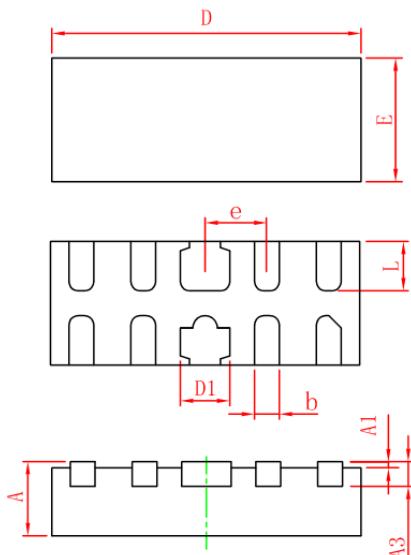

Symbol	Dimensions (mm)		
	Min	Nom	Max
A	0.45	0.50	0.60
A1	-	0.02	0.05
A3	0.10	0.15	0.20
D	2.45	2.50	2.55
E	0.95	1.00	1.05
D1	0.35	0.40	0.45
b	0.15	0.20	0.25
e	0.50BSC		
L	0.35	0.40	0.45

### Marking



### Packaging Information

Order Code	Packaging	Reel Size	PCS/Reel
PTUC0524PA	DFN10L(2.5x1.0mm)	7 inch	3,000



# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for ESD Suppressors / TVS Diodes category:***

***Click to view products by Polytronics manufacturer:***

Other Similar products are found below :

[NTE4902](#) [P4SMAJ15A](#) [P4SMAJ26A](#) [SMAJ400CA-TP](#) [TGL34-47CA](#) [ESDAULC45-1BF4](#) [SM1605E3/TR13](#) [SMF20A-TP](#) [P4SMAJ12A](#)  
[CPDUR24V-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [MPLAD30KP45CAE3](#) [MMBZ27VCLQ-7-F](#) [MMAD1108/TR13](#) [MPLAD30KP24A](#)  
[ACPDQC5V0R-HF](#) [DFLT170A-7](#) [NTE4900](#) [NTE4926](#) [NTE4938](#) [SMF22A-TP](#) [SMF12A-TP](#) [SLVU2.8-TP](#) [SMLJ6.5CA-TP](#) [SMAJ6.5CA-TP](#)  
[MMAD1108E3/TR13](#) [D5V0M1U2LP3-7](#) [SMAJ400A-TP](#) [AOZ8811DT-03](#) [AOZ8831DI-05](#) [AOZ8831DT-03](#) [SMAJ188CA](#) [3SMC33CA](#)  
[BK](#) [CPDQC3V3C-HF](#) [CPDQC12VE-HF](#) [MPLAD30KP170CA](#) [82357120100](#) [5.0SMLJ15CA-TP](#) [5KP18A-TP](#) [P6KE8.2A-TP](#)  
[MPLAD30KP43CAE3](#) [SMAJ43A-TP](#) [D5V0F6U8LP33-7](#) [TVS5501V10MUT5G](#) [5.0SMLJ24CA-TP](#) [SMAJ110CA-TP](#) [MPLAD15KP75CAE3](#)  
[MMAD1103e3/TR13](#) [DFLT40AQ-7](#)