


Model 1658
Cable Assembly Type "N" Male Both Ends

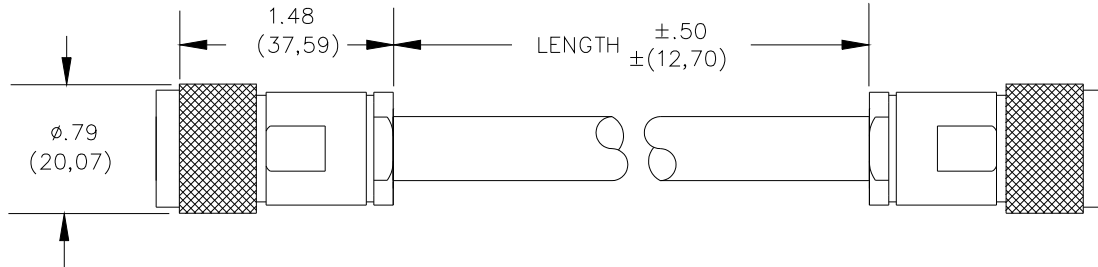

MATERIALS:

Conn: 1st end – Type "N" Male, See table above.

Finish: Body and Fitting, Tarnish resistant.

Center contact: Gold plated per requirement of MIL-C-39012.

Nominal Impedance: 50 Ohms.

Cable: See table above. Marking: "POMONA 1658-T-XX".

Conn: 2nd end – Same as first end.

RATINGS:

Operating Voltage: 1000 VRMS Max.

Operating Temperature: +89°C Max.

ORDERING INFORMATION: Model 1658-T-XX

XX = Cable Lengths, Standard Length: 18" (457), 24" (610), 36" (914), 48" (1219) & 60" (1542).

Additional lengths can be quoted upon request.

Ordering Example: 1658-T-24 Indicates 24" in length

Cable	
	RG214/U (Double Shield)
Model	1658-T-XX
Capacitance pf/ft	30.8
Nominal Impedance	50
Cable Diameter	$\phi .425$

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [R288940005](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-77RP1-0305](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#)