


Model 1756 Shielded Low Voltage Spade Lug Patch Cord

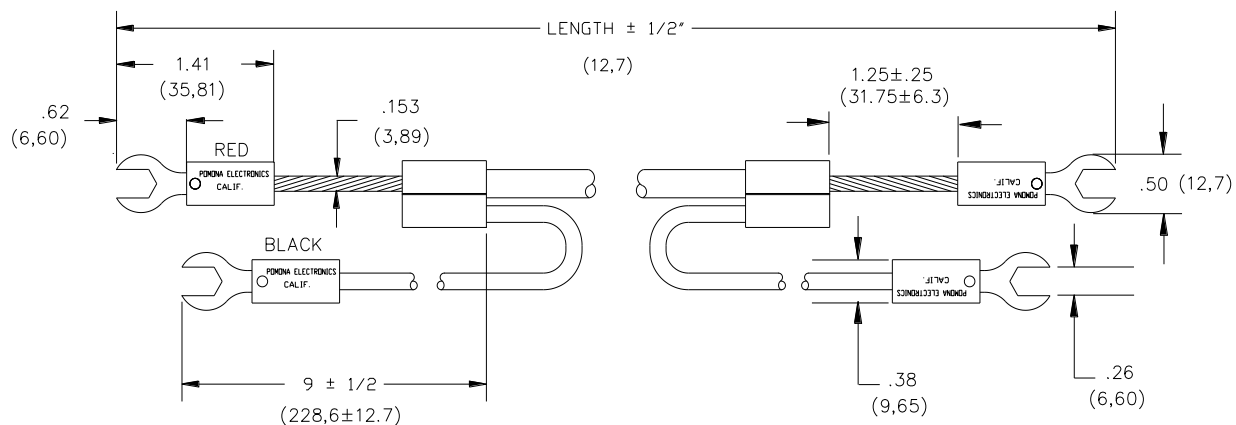

Features

- Pomona's Model 1756 is part of a family of test accessories ideal for low voltage precision measurements.
- Spade lugs are of high conductivity, gold plated ETP copper alloy 110, to greatly minimize the effects of Thermal Electric Voltage (Thermal EMF).
- Thermal EMF is generated at the junction of dissimilar metals at different temperatures and is a common source of error in low micro and nano volt measurements.
- In addition, low Thermal EMF spade lugs are attached to the wire shield to lessen interference, interaction, or leakage which might affect the accuracy of your precision voltage measurement.

Materials

- Spade Lugs:** ETP (Electrolytic Tough Pitch) 110 Copper Alloy, ½ Hard, Gold Plated
Insulation: Polypropylene, molded to spade lug body and wire. Color: Red and Black
Marking: "POMONA ELECTRONICS CALIF"
- Cable:** 12 AWG; Stranding 7 x 38/36 Bare Copper, Braided Bare Copper Shield
Inner Insulation: Natural Polyethylene, O.D. .153" (3,89mm)
Outer Jacket: PVC, Color: Black, O.D. .246" (6,25mm)
Marking: "POMONA 1756-XX"
- Shield Lead:** 18 AWG, Stranding 65 x 36 t.c., PVC Insulated, O.D. .144" (3,66mm)

Ratings

- Voltage:** For *CE compliance* and for personal safety, do not hold in hand when voltages exceed 30 Vrms/60 Vdc.
Maximum voltage for *hands free use* in controlled testing environments: 2000 Vrms Max.
Do not use on circuits where transient stresses can exceed the rated voltage.
- Temperature:** +55°C (+131°F) Max.
- Current:** 20 Amperes Max.

Ordering Information

Model 1756-XX
XX = Lead Length in Inches, Standard Length: 24" (60,96cm) & 48" (121,92cm)
Additional lengths can be quoted upon request.

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[795-2384-10-25](#) [1301430020](#) [15107](#) [1510-24-105](#) [15308](#) [15408](#) [15302](#) [15307](#) [15407](#) [15409](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1927617](#) [2450](#) [2524-A-60](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2524-A-48](#) [2977-J-48](#) [R948131000](#) [380200](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [LB1F-2R-WHT](#) [6345](#) [6432](#) [EM3782-24-3#](#) [R948161002](#) [R948160002](#) [R948170002](#) [R948171002](#) [R948163002](#) [973604100](#) [934160101](#) [934160100](#) [R948174000](#) [CT3269](#) [CT3258](#) [CT3158-100](#) [HSPL 8568/AWG16/200/RT](#) [HSPL 8568/AWG16/200/SW](#) [28.0119-10020](#) [28.0127-05025](#) [28.0127-20025](#)