
Pomona®

Model 1960 Alligator Test Clip To Insulated Spade Plug

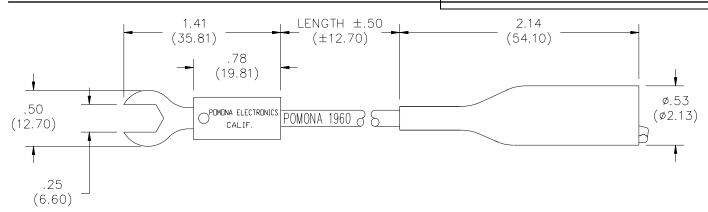

FEATURES:

- Spade lug attaches securely to a screw terminal while the medium size alligator test clip can quickly grab onto terminal points.
- Spade lug and alligator bodies are nickel plating for tarnish resistance
- The alligator features a flex boot for insulation protection.
- Alligators clip has .187" (4.75mm) max. jaw opening.

MATERIALS:

Alligator:Body: Steel, Nickel Plated

Spring: Stainless Steel

Flex Boot: Vinyl

Wire: 18 AWG, Stranding: 65 X 36 tinned copper, PVC Insulation, .144" (3.66 mm) O.D.

Marking: "POMONA 1960-XX"

Spade Lug: Body: Brass, Nickel Plated

Insulation: Polypropylene molded to the spade lug and wire. Color matches wire.

RATINGS:

Operating Voltage: 150 VRMS Current: 5 Amperes Operating Temperature: +50°C (+122°F)

ORDERING INFORMATION: Model 1960-XX-*

XX = Length in inches Standard Lengths: 36" (91.44cm),

- = Color of Flex Boot and Wire, -0 Black, -2 Red
- Color of Flex Boot and write, -0 Black, -2 Red
 Additional langths and colors can be guated upon real
- Additional lengths and colors can be quoted upon request.

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Leads category:

Click to view products by Pomona manufacturer:

Other Similar products are found below :

 795-2384-10-25
 1301430020
 1510-24-105
 15308
 15408
 15302
 15409
 BU-1149-A-36-0
 BU-1481-E-12-0
 BU-1481-E-24-0
 1927617
 2450

 2524-A-60
 924961-C
 LB1F-2R-RED
 LB1F-2R-YLW
 2500
 2524-A-48
 2977-J-48
 R948131000
 380200
 BU-1449-E-12-2
 BU-1480-E-24-0

 BU-1481-E-12-2
 BU-1481-E-24-2
 LB1F-2R-BLK
 LB1F-2R-BLUE
 LB1F-2R-WHT
 6345
 6432
 EM3782-24-3#
 R948161002
 R948160002

 R948170002
 R948171002
 R948163002
 973604100
 934160101
 934160100
 R948174000
 CT3269
 CT3258
 CT3158-100
 HSPL

 8568/AWG16/200/RT
 HSPL
 8568/AWG16/200/SW
 28.0119-10020
 28.0127-05025
 28.0127-20025
 49.0079-20021
 49.0079-20024