
Pomona®

Model 2451 BNC Female Panel Receptacle

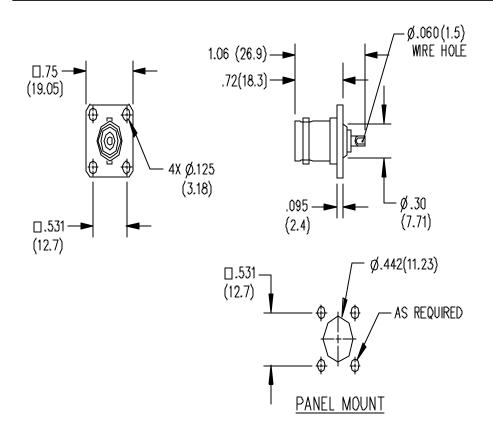

MATERIALS:

Body and Fittings: Brass, Tarnish Resistant Plating Center Contact: Gold Plated Beryllium Copper Dielectric: PTFE Finish: Body and Fittings: Tarnish Resistant Center Contact: Gold Plated

RATING:

Nominal Impedance: 50 Ohms Operating Temperature: -65°C to +165°C

ORDERING INFORMATION: Model 2451

All dimensions are in inches. Tolerances (except noted): $xx = \pm.02^{\circ}$ (,51 mm), $xxx = \pm.005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99	Sales: 909-469-2900	Fax: 909-629-3317
SY/EH/LS	Technical Assistan	ce: 800-241-2060
S:\Engineering\Release\DataSheets\FlukeDataSheet\d2451_1_01.doc		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Connectors / Coaxial Connectors category:

Click to view products by Pomona manufacturer:

Other Similar products are found below :

 8915-1511-000
 89674-0827
 6001-7071-019
 6002-7051-003
 6002-7551-202
 6059674-1
 619550-1
 630059-000
 M39030/3-01N
 M3933/25

 36N
 6500-7071-046
 6769
 CX050L2AQ
 7002-1542-011
 7004-1512-000
 7009-1511-004
 7010-1511-000
 7029-1511-060
 7101-1541-010

 7101-1571-002
 7105-1521-002
 7145-1521-002
 7203-1571-003
 7209-1511-011
 7210-1511-015
 7210-1511-019
 73137-5015
 73216-2241

 7325-1512-000
 73404-2300
 7405-1521-005
 7405-1521-005
 7406-1521-005
 8527
 8547
 FS11V
 8808-1511-001
 9049-9513-000
 9074-9513

 000
 9101-9573-002
 910A205F
 9130-9573-002
 PL11SC-026
 PL375-33
 PL40-5
 PL71-9
 PL74C-221
 PL75MC-217
 PL803-7
 980-8666-005