


Model 2631 Breakout: BNC (Female) To Minigator Test Clips

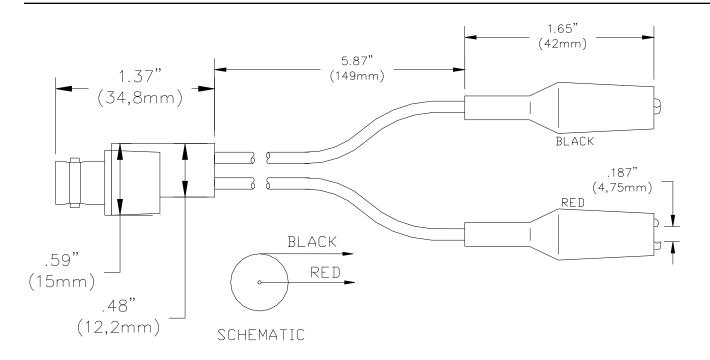

FEATURES:

- ✓ Converts BNC (male) cables / connectors to minigator test clips for test versatility.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- ✓ BNC center contact is gold plated Beryllium Copper for corrosion resistance, low contact resistance and long insertion life.
- ✓ Minigator clips attach to terminals up to .187" (4.75mm) diameter.
- ✓ Black wire is connected to BNC shell, red wire to BNC center contact.

MATERIALS:

BNC: Nickel Plated Brass, Center Contact: Gold Plated Beryllium Copper

Dielectric: PTFE

Wire: 20 AWG, PVC Insulated

Minigators: Nickel plated steel, Spring: stainless steel

Boot: Vinyl, color matches color of wire

RATINGS:

Operating Voltage: Hands free testing in controlled voltage environments: 45 VRMS Max.

Operating Temperature: +122°F (+50°C) Max.

ORDERING INFORMATION: Model 2631*

* Custom lengths are available, contact Pomona Product Support at: 1-800-241-2060

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Rev: 100 D1093860

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Leads category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

795-2384-10-25 1301430020 1510-24-105 15308 15408 15302 15409 BU-1149-A-36-0 BU-1481-E-12-0 BU-1481-E-24-0 1927617 2450 2524-A-60 924961-C LB1F-2R-RED LB1F-2R-YLW 2500 2524-A-48 2977-J-48 R948131000 380200 BU-1449-E-12-2 BU-1480-E-24-0 BU-1481-E-12-2 BU-1481-E-24-2 LB1F-2R-BLK LB1F-2R-BLUE LB1F-2R-WHT 6345 6432 EM3782-24-3# R948161002 R948160002 R948170002 R948171002 R948163002 973604100 934160101 934160100 R948174000 CT3269 CT3258 CT3158-100 HSPL 8568/AWG16/200/RT HSPL 8568/AWG16/200/SW 28.0119-10020 28.0127-05025 28.0127-20025 49.0079-20021 49.0079-20024