
Pomona®

Model 3220 Minigator Clip To Stacking Banana Plug

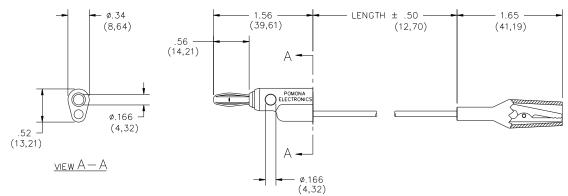

FEATURES:

- Provides cross hole for cross stacking, and a jack for vertical stacking.
- Allows an Alligator Clip with leads to be used from a Banana Jack.

MATERIALS:

Conn: Insulated Minigator Clip

Material: Steel.

Finish: Nickel plated.

Insulator: Vinyl.

Color: Matches color of wire.

Conn: Banana Plug

Material: Spring, Beryllium Copper per QQ-C-533, Alloy 172, Cond. HT. Plug Body, Brass per QQ-B-626, Alloy 360, ¹/₂ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches. Insulation: Polypropylene molded to plug body and wire. Color: Matches color of wire. Marking: "POMONA 3220-XX"

RATINGS:

Operating Temperature: +50° C. (+122° F.) Max. Operating Voltage: Hand-held testing: 30VAC/60VDC Max. Current: 5 Amperes **ORDERING INFORMATION:** Model 3220-XX-* XX = Cable Lengths, Standard Lengths: 12" (305), 18" (475), 24" (610, 36" (914). Additional lengths can be quoted upon request. *= Color, -0 Black, -2 Red Ordering Example: 3220-36-2 Indicates 36" in length, color is Red.

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Made in USA

^{6/9/99}

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Leads category:

Click to view products by Pomona manufacturer:

Other Similar products are found below :

 795-2384-10-25
 1301430020
 15107
 1510-24-105
 15308
 15408
 15302
 15307
 15407
 15409
 BU-1149-A-36-0
 BU-1481-E-12-0
 BU-1481-E

 E-24-0
 1927617
 2450
 2524-A-60
 LB1F-2R-RED
 LB1F-2R-YLW
 2500
 2524-A-48
 2977-J-48
 R948131000
 380200
 BU-1449-E-12-2
 BU-1449-E-12-2
 BU-1480-E-24-0

 1480-E-24-0
 BU-1481-E-12-2
 BU-1481-E-24-2
 LB1F-2R-BLK
 LB1F-2R-BLUE
 LB1F-2R-WHT
 6345
 6432
 EM3782-24-3#
 R948161002

 R948160002
 R948170002
 R948163002
 973604100
 934160101
 934160100
 R948174000
 CT3269
 CT3258
 CT3158-100

 HSPL 8568/AWG16/200/RT
 HSPL 8568/AWG16/200/SW
 28.0119-10020
 28.0127-05025
 28.0127-20025