
# Pomona®

### Model 3352 & 3352N PJ-051 (WE310) Phone Plug To Alligator Clips

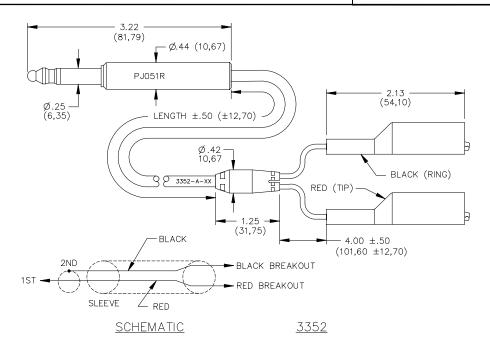

### **FEATURES:**

 Converts WE310 (PJ-051) Female into Alligator clips.

• Length other than those specified are available on request.

### **MATERIALS:**

Conn: 1<sup>st</sup> End – PJ-051 Phone Plug

Material: Body – Brass Handle – Nylon. Color: Red.

Cable:

2 Cond. Twisted Pair – 18 AWG stranding

65 X 36 t.c., Vinyl insulation.

Marking "POMONA 3352-A-\*". Color: Gray

Breakout: PVC molded to breakout leads and cable.

Color matches color of cable.

**Breakout Leads:** 

20 AWG stranding 41 X 36 t.c., PVC insulated,

2.21 (.087) O.D. Color matches color of insulator.

Conn: 2<sup>nd</sup> End – Insulated Alligator Clips

Material: Steel

Finish: Nickel plated. Insulation: Vinyl.

Color: Black and red.

**RATINGS:** 

Operating Temperature: +50° C (+122° F) Max.

Operating Voltage: 150VRMS/DC

Current: 5 Amperes

**ORDERING INFORMATION:** 

Model 3352-A-XX

XX=Cable Length, Standard Length: 60" (1524


nm)

Ordering Example: 3352-A-60 (1524 mm)

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

## Pomona®

## Model 3352 & 3352N PJ-051 (WE310) Phone Plug To Alligator Clips

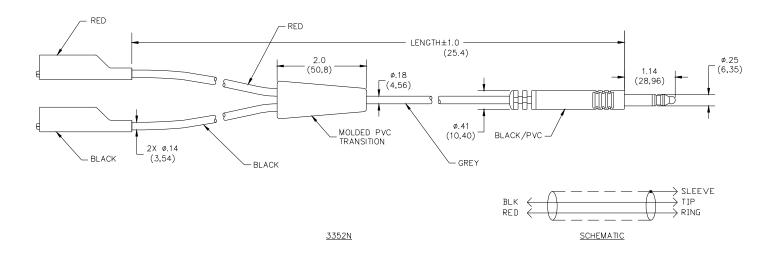

#### **FEATURES:**

- Shielded cable to reduce noise
- Provides quick access from WE-310 jack to terminals
- WE-310 Plug molded to the cable to provide optimum durability

### **MATERIALS:**

Plug – Nickel plated brass

Cable – 2 Conductor shielded twisted pair, PVC jacket and insulation

Breakout - Molded

Alligator - Nickel plated steel, Insulator - vinyl

### **RATINGS:**

Operating Voltage – 150 VRMS

Operating Temperature - 122°F (50°C)

**ORDERING INFORMATION:** Model 3352N-A-XX XX = Cable Length, Standard Length: 60" (1524 mm)

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Leads category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

795-2384-10-25 1301430020 15107 1510-24-105 15308 15408 15302 15307 15407 15409 BU-1149-A-36-0 BU-1481-E-12-0 BU-1481-E-24-0 1927617 2450 2524-A-60 LB1F-2R-RED LB1F-2R-YLW 2500 2524-A-48 2977-J-48 R948131000 380200 BU-1449-E-12-2 BU-1480-E-24-0 BU-1481-E-12-2 BU-1481-E-24-2 LB1F-2R-BLK LB1F-2R-BLUE LB1F-2R-WHT 6345 6432 EM3782-24-3# R948161002 R948160002 R948170002 R948171002 R948163002 973604100 934160101 934160100 R948174000 CT3269 CT3258 CT3158-100 HSPL 8568/AWG16/200/RT HSPL 8568/AWG16/200/SW 28.0119-10020 28.0127-05025 28.0127-20025