
# Pomona®

## Model 4277 BNC (Female) Cable With Molded Strain Relief

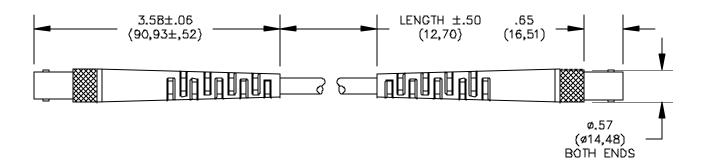

#### **FEATURES:**

- BNC center contacts are gold plated Beryllium Copper for optimum electrical connection.
- Molded Strain Relief is tightly bonded to the cable jacket to ensure a long cable life.
- Connector dielectric is PTFE and the BNC shell is tarnish resistant for superior performance.

#### **MATERIALS:**

BNC (Female): Body: Brass, Nickel Plated

Center Pin: Beryllium Copper, Gold Plated

Impedance: 50 Ohms

Strain Relief: PVC Molded to Cable, Color: Black

Cable: RG58C/U, Impedance: 50 Ohms Nominal, O.D. .195" (5,0 mm), Color: Black,

Capacitance per Ft.: 30.8 pF/Ft. Marking: "POMONA", "4277-C-XX"

#### **RATINGS:**

Operating Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 500VRMS Max.

Operating Temperature: 50°C (+122°F) Max.

#### **ORDERING INFORMATION:** Model 4277-C-XX

XX = Length in Inches, Std. Lengths: 12" (30 cm), 24" (61 cm), 36" (91 cm), 48" (122 cm) 60" (152,40 cm).

Custom lengths can be quoted upon request.

Ordering Example: 4277-C-36 is a Model 4277 with the length of 36" excluding the BNC connectors and strain relief dimensions.

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Made in USA

6/9/99 Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS Technical Assistance: 800-241-2060
S:\Engineering\Release\DataSheet\S\FlukeDataSheet\d4277\_1\_01.doc

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Cable Assemblies category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

573/2 73-6311-6 73-6353-3 73-6364-6 MDB1-9SH001 MDM-15PH003L-K139 MDM-21PH003L-K139 MH113-01SB1-MH1RP-0152
MIKQ6-7SH076 R288940005 RF174-01RP1-03RP1-0110 RMTB1-6PHY0102 145111-05-12.00 1661-C-24 2192 CA-628485-A43

24P104C24J1-012 24P104C24P1-006 24P104C24P1-018 24P203C24P2-006 24P204C24J1-003 172-2150-EX 1800920920914PJ FCB-3030-ALT 21117-046 21117-050 PCX-24-50 24P103C24P2-003 25P203C25P2-003 R284008001 R285426000 R288940003 R288940008

RF174-03RP1-01BR1-0200 RF179-74BJ3-77RP1-0305 RMTB1-15PHY0102 RMTB1-8PHY0102 4814-BB-24 500-181-R-ACC MIKQ6-7SH023 5260-72 314-120 JR4N1-CL1-6F JR4R3-CL1-4F JT2N1-CL1-1F JT2T1-CL1-6F 4814-K-48 RN-UFL-SMA6 100E151JW3600X CCNTN2-MM-LL335-26